


ENGINEERING DEGREE SERIES

HYDRAULICS



LEWITT

HYDRAULICS

UNIVERSITY OF LONDON

EXAMINATION PAPERS

By arrangement with the University of London, the rights of publication of the Examination Papers of the University have been acquired by the University of London Press.

A complete list of papers and their cost, along with a detailed list of numerous collected sets of papers, will be sent post free upon application to the

MANAGER,
University of London Press, Ltd.,
17, Warwick Square,
London, E.C.4.

HYDRAULICS

A TEXTBOOK
COVERING THE SYLLABUSES OF THE
B.Sc. (ENG.), A.M.INST.C.E., AND A.M.I.MECH.E.
EXAMINATIONS IN THIS SUBJECT

BY
E. H. LEWITT, B.Sc. (Lond.)
M.INST.AERO.E., A.M.I.MECH.E.

LECTURER IN MECHANICAL ENGINEERING AT THE CITY AND
GUILDS (ENGINEERING) COLLEGE OF THE IMPERIAL COLLEGE
OF SCIENCE AND TECHNOLOGY, SOUTH KENSINGTON



FOURTH EDITION

LONDON
SIR ISAAC PITMAN & SONS, LTD.
PARKER STREET, KINGSWAY, W.C.2
BATH, MELBOURNE, TORONTO, NEW YORK
1932

PITMAN'S ENGINEERING DEGREE SERIES

*These Books are published especially for Students
preparing for the Examinations for the B.Sc. (Eng.),
A.M.I.Mech.E., A.M.Inst.C.E., and the Advanced
National Certificate*

THEORY OF MACHINES

By LOUIS TOFT, M.Sc.Tech., and A. T. J. KERSEY, A.R.C.Sc.,
M.I.Mech.E., M.I.A.E. In demy 8vo, cloth gilt, 420 pp. 12s. 6d.
net.

PERFORMANCE AND DESIGN OF D.C. MACHINES

By A. E. CLAYTON, D.Sc., M.I.E.E. In demy 8vo, cloth gilt,
430 pp. 16s. net.

APPLIED THERMODYNAMICS

By Professor W. ROBINSON, M.E., M.Inst.C.E. In demy 8vo,
cloth gilt, 574 pp. 18s. net.

THEORY OF STRUCTURES

By H. W. COULTAS, M.Sc. (Birm.), B.Sc. (Leeds), A.M.I.Str.E.,
A.M.I.Mech.E., *Lecturer in the Civil Engineering Department,
Birmingham University.* In demy 8vo, cloth gilt, 350 pp., with
198 illustrations. 15s. net.

HYDRAULICS

By E. H. LEWITT, B.Sc. (Lond.), M.I.Ae.E., A.M.I.M.E.
Fourth Edition. In demy 8vo, cloth gilt, 384 pp., with 163
illustrations. 10s. 6d. net.

ELECTRICAL TECHNOLOGY

By H. COTTON, M.B.E., M.Sc., A.M.I.E.E. In demy 8vo, cloth
gilt, 392 pp., with 330 illustrations. 12s. 6d. net.

EXAMPLES IN ENGINEERING DESIGN

By G. W. BIRD, Wh.Ex., B.Sc., A.M.I.Mech.E., A.M.I.E.E.
Second Edition. In demy 4to, cloth gilt, 100 pp., 40 plates.
6s. net.

STRENGTH OF MATERIALS

By F. V. WARNOCK, Ph.D., B.Sc. (Lond.), F.R.C.Sc.I.,
A.M.I.Mech.E. In demy 8vo, cloth gilt, 379 pp. 12s. 6d. net.

ENGINEERING ECONOMICS

By T. H. BURNHAM, B.Sc. Hons. (Lond.), A.M.I.Mech.E.
Specially written to cover the engineering economics syllabus
of the examination for A.M.I.Mech.E. In demy 8vo, cloth gilt,
338 pp. 10s. 6d. net.

PRACTICAL MATHEMATICS

By LOUIS TOFT, M.Sc. (Tech.), and A. D. D. MCKAY, M.A.
In demy 8vo, cloth gilt, 600 pp. 16s. net.

*Write for complete Technical and Commercial Catalogues.
Post free from*

SIR ISAAC PITMAN & SONS, Ltd.

Parker Street, Kingsway, London, W.C.2

First Edition, 1923
Second Edition, revised, 1925
Third Edition, revised and enlarged, 1927
Reprinted, 1930
Fourth Edition, Revised, 1932

BY THE SAME AUTHOR

THE RIGID AIRSHIP

A treatise on the design and performance. The only complete work on the rigid airship yet published.

Demy 8vo, cloth gilt, 293 pages, 135 diagrams, and containing a complete worked-out example of design.

30s. net.

**DEFINITIONS AND FORMULAE FOR
STUDENTS—APPLIED MECHANICS**

This booklet will provide the engineering student with all necessary definitions and formulae in a convenient form.

In pocket size, 40 pages.

6d. net.

Third Impression.

LONDON

SIR ISAAC PITMAN & SONS, LTD.
PARKER STREET, KINGSWAY, W.C.2

PREFACE

THE recent researches on the viscous flow of fluids and the tendency for a more general application of the principle of similarity have rendered it necessary to add a large amount of new matter to the former editions of this book.

The whole of the work has been revised. The former chapter on turbines and centrifugal pumps has been divided into two separate chapters, one on water turbines and the other on centrifugal pumps. Much new matter has been added to these chapters, chiefly on the principle of similarity and on the performance of these machines. A new chapter has been added on the viscous resistance of a fluid in which is included the principle of dynamical similarity. The chapter on hydraulic machines has been greatly enlarged, whilst parts of the chapter on buoyancy has been rewritten in a simpler form. Several additions and alterations have been made in other parts of the book, and more examination questions from recent engineering examinations have been added.

In this edition an attempt has been made to illustrate the theory by giving an account of its practical uses.

Thanks are due to the numerous correspondents who have kindly suggested some of these additions and corrections. The author also wishes to thank the following manufacturers of hydraulic machinery who have generously supplied photographs, drawings, and test results of their machines: Messrs. Alfred Amsler & Co., Schaffhouse, Switzerland; Messrs. Armstrong, Whitworth & Co., Newcastle-on-Tyne; Messrs. Green & Carter, Ltd., Winchester; The Hydraulic Engineering Co., Chester; Messrs. Worthington-Simpson, Newark-upon-Trent.

E. H. LEWITT.

SOUTH KENSINGTON.

PREFACE TO FIRST EDITION

THIS book is intended for students working for an engineering degree. Although particularly written for the internal and external degrees of the University of London, it will be found to cover the course of other universities and to be suitable for the final examinations of the professional engineering institutions.

The book deals from first principles with the theory of hydraulics and its applications; no attempt has been made to deal with design problems, which are beyond the scope of the engineering degree. The mathematics have been kept as elementary as possible and many of the standard proofs have been simplified. Numerous worked-out examples from past B.Sc. examinations of the University of London are included, and the majority of the exercises given at the end of each chapter are taken from this source. The illustrations, with the exception of those from actual photographs, are intended as diagrammatic only.

This book forms the first of a series intended to cover the various subjects included in the engineering degree examinations. It will also, it is hoped, be found eminently suitable for students taking the advanced courses for the National Certificates which are now being issued jointly by the Board of Education and the Engineering Institutions.

The author wishes to thank the Hydro-Electric Department of Sir W. G. Armstrong, Whitworth & Co., and Messrs. Boving & Co., for supplying photographs of turbines, etc., and Mr. C. E. Rusbridge, B.Sc., for kindly checking the proofs and examples.

E. H. LEWITT.

SOUTH KENSINGTON,
1923.

PREFACE TO SECOND EDITION

THE gratifying manner in which the first edition has been received, and the consequent demand for this book, has provided an early opportunity of correcting one or two numerical errors in the examples.

The present edition embodies several suggestions received from correspondents for minor improvements which, though not of paramount importance, will, it is hoped, increase the utility of the book to students.

The courtesy of these gentlemen is hereby gratefully acknowledged.

E. H. L.

SOUTH KENSINGTON.
1925.

CONTENTS

PAGE

PREFACE	vii
-------------------	-----

CHAPTER I

STATIC PRESSURE OF A FLUID	1
Introduction—Properties of a fluid—The hydraulic press— Pressure head of a liquid—Pressure gauges—Centre of pressure— Pressure on lock gates and dams.	

CHAPTER II

THE BUOYANCY OF A LIQUID	25
Buoyancy—Equilibrium of floating bodies—Metacentric height— Experimental and mathematical determination of metacentric height.	

CHAPTER III

THE FLOW OF A FLUID	36
Flow of water—Work done by pressure—Total energy of water— Bernoulli's equation—Venturi meter—Horse-power of jet— Centrifugal head of a revolving liquid—Vortex motion—Flow of gases—The Pitot tube.	

CHAPTER IV

ORIFICES AND MOUTHPIECES	68
Flow through orifices—Coefficients of contraction, velocity, and discharge—Large vertical orifices—Drowned orifices—Time of emptying tanks—Loss of head due to sudden enlargement, sudden contraction, and obstruction—External mouthpiece—Borda's mouthpiece.	

CHAPTER V

NOTCHES AND WEIRS	97
Rectangular and triangular notches—Principle of similarity— Francis' and Bazin's formula for rectangular weirs—Velocity of approach—Time of emptying reservoir with weir.	

CHAPTER VI

FRICTION AND FLOW THROUGH PIPES	114
Fluid friction—Froude's experiments—Resistance of ships— Friction of revolving discs—Hydraulic gradient—Loss of head due to friction in pipes—Reynold's experiments—Critical velocity —Parallel flow through pipes—Flow of gases through pipes— Transmission of power through pipes—Nozzles.	

CONTENTS

xi

CHAPTER VII

	PAGE
FLOW THROUGH OPEN CHANNELS.	157

Formula for channels—Depth for maximum discharge for rectangular channels—Trapezoidal channel—Circular channel—Most economical section—Irrregular channels—Measurement of flow in channels—River bends—Water supply and rainfall.

CHAPTER VIII

RECIPROCATING PUMPS	180
-------------------------------	-----

Types of pumps—Work done by pump—Effect of acceleration and frictional resistance—Slip, negative slip, and coefficient of discharge—Separation in suction and delivery pipes—Air vessel on suction and delivery pipes—Work saved by air vessel—Rate of flow into and from air vessel.

CHAPTER IX

IMPACT OF WATER	205
---------------------------	-----

Pressure of jet on stationary and moving flat plates—Pressure on curved vanes—Radial vanes—Velocity triangles—Propulsion of ships by jet.

CHAPTER X

WATER TURBINES	222
--------------------------	-----

Classification of turbines—Notation—Reaction turbines: outward and inward flow, axial flow, mixed flow—Velocity triangles for reaction turbines—Impulse turbines—Velocity triangles for impulse turbines—Summary of formula for turbine problems—Barker's mill—Pelton wheel—Specific speed of a turbine—Governor turbines—Characteristic curves—Principle of similarity and its application to model testing.

CHAPTER XI

CENTRIFUGAL PUMPS	270
-----------------------------	-----

Whirlpool chambers—Velocity triangles for pumps—Least starting speed—Head lost by varying flow—Pressure in pump—Specific speed of centrifugal pump—Diameter of impeller—Design of turbine pump—Principle of similarity—Characteristic curves—Multistage pump.

CHAPTER XII

VISCOUS RESISTANCE OF FLUIDS	295
--	-----

Viscous flow—Coefficient of viscosity—Effect of temperature—Stream line and turbulent flow—Viscous flow through pipes and between parallel surfaces—Resistance of bearings—Principle of dimensional similarity and its applications.

CONTENTS

CHAPTER XIII

HYDRAULIC MACHINES, METERS, AND VALVES . . .	PAGE 324
The hydraulic accumulator and intensifier—The Kent Venturi meter—The Deacon meter—The hydraulic ram—The hydraulic press—Hydraulic crane and lifts—The hydraulic capstan— Valves, joints, and packing.	
SUMMARY OF FORMULAE	355
INDEX	369

HYDRAULICS

CHAPTER I

STATIC PRESSURE OF A FLUID

1. **Introduction.** The subject of Hydraulics deals with the laws governing the pressure and flow of fluids and the application of these laws to engineering practice. The term "fluid" includes liquids and gases; but as these two physical states have widely divergent properties it is inconvenient to deal with both under the same heading. For this reason the science of Hydraulics is mainly confined to the study of liquids, and as water is the liquid usually dealt with in practice, the subject of Hydraulics is chiefly the study of water and its applications.

The subject was formerly divided into two parts: one dealing with fluids at rest, called Hydrostatics, the other dealing with fluids in motion, known as Hydrodynamics; but the great development of hydraulic machinery in recent years has rendered these sub-divisions obsolete. Hydraulics now consists of the study of water pressure, buoyancy, the flow of water, and hydraulic machinery such as pumps, turbines, and accumulators.

2. **Properties of Fluids.** The term fluid is applied to all substances which offer no resistance to change of shape. Fluids may be divided into two classes: liquids and gases. The former offer great resistance to compression and are not greatly affected by change of temperature; the latter are easily compressed and are more susceptible to temperature changes. Liquids have a bulk elastic modulus when under compression, and will store up energy in the same manner as a solid. The value of the bulk elastic modulus of water under compression is 300,000 lb. per sq. in. As the contraction of volume of a liquid under compression is extremely small, it is usually ignored and the liquid is assumed to be incompressible.

A liquid will withstand a slight amount of tension owing to the molecular attraction between the particles, which will cause an apparent shear resistance between two adjacent layers; this phenomenon is known as viscosity.

The coefficients of expansion of liquids are small and, as the science of hydraulics deals with liquids under atmospheric temperature only, the effect of temperature changes may be ignored; consequently, the density of a liquid may be assumed to be constant.

The density of water is 62.4 lb. per cu. ft.

The ratio between the density of any liquid and the density of water is known as the specific gravity of that liquid.

No liquid can exist as a liquid at zero pressure; in fact all known liquids vaporize at various pressures above zero, depending on the temperature.

Water vaporizes at a pressure of .34 lb. per sq. in. at 20° C., below this pressure it cannot exist as a liquid. There are also dissolved gases in water which are given off at low pressures and cause great inconvenience in hydraulic problems. For this reason care must be taken to prevent the pressure of water getting below 8 ft. of water absolute, at which pressure the dissolved gases are given off and vaporization is also liable to commence.

3. Pressure of a Fluid. The intensity of pressure of a fluid is the pressure per unit area. If the pressure is measured in pounds and the area in inches, the intensity of pressure will be in pounds per square inch.

Let a fluid be under a uniform pressure and let its total pressure on an area of a sq. in. be P lb. Let p be the intensity of pressure. Then,

$$p = \frac{P}{a} \text{ lb. per sq. in.}$$

At any point in a fluid the intensity of pressure acts equally in all directions. If a fluid is contained in a vessel and is under a uniform intensity of pressure throughout, a slight increase in the intensity of pressure at one part will be immediately transmitted to all parts of the vessel.




FIG. 1

The pressure of a fluid on a surface will always act normal to the surface.

Suppose a curved surface be under a uniform pressure p (Fig. 1); the direction of p at any point will be at right angles to the surface at that point. Consider a small element of the surface of area a , inclined to the horizontal at an angle θ .

STATIC PRESSURE OF A FLUID

Then, as p acts normal to a , its inclination to the vertical will be θ .

Total pressure on area $a = pa$.

Vertical component of total pressure on $a = pa \cos \theta$.


But, $a \cos \theta =$ horizontal projection of area a .

Therefore, vertical component of pressure on $a = p \times$ horizontal projection of area a .

From this it will be seen that if any shaped surface is under uniform pressure, the total pressure acting on it in any given direction is the intensity of pressure multiplied by the projected area normal to the given direction.

EXAMPLE.

A hemispherical dome (Fig. 2) of 2 ft. radius contains a fluid under a pressure of 120 lb. per sq. ft. Find the total force tending to lift the dome.



$$\begin{aligned} \text{Total vertical force} &= p \times \text{horizontal projected area} \\ &= p \times \pi (\text{radius})^2 \\ &= 120 \times \pi 2^2 \\ &= 1509 \text{ lb.} \end{aligned}$$

4. The Hydraulic Press. The hydraulic press is a machine by which large weights may be lifted by the application of a much smaller force. A diagrammatic view of a hydraulic press is shown in Fig. 3. The weight W is lifted by the large ram R , which is raised by the pressure of the fluid. This




FIG. 3

pressure is produced by the force F acting on the plunger P .

Let $A =$ area of ram

$a =$ area of plunger

$p =$ intensity of pressure of fluid.

As the intensity of pressure is the same throughout the chamber,

$$W = pA$$

and $F = pa$

Equating the values of p from these two equations,

$$\frac{W}{A} = \frac{F}{a}$$

HYDRAULICS

Therefore, $W = \frac{FA}{a}$

Thus, the mechanical advantage obtained by means of this press is equal to the ratio of the areas of the ram and plunger.

This is the principle of the hydraulic lifting jack.

EXAMPLE.

A hydraulic press has a ram of 5 in. diameter and a plunger of $\frac{1}{2}$ in. diameter. What force would be required on the plunger to raise a weight of 1 ton on the ram? If the plunger had a stroke of 10 in., how many strokes would be necessary to lift the weight 3 ft.? and what volume of additional water would be required? If the time taken to lift the weight is 12 minutes, what horse-power would be required to drive the plunger? Neglect all losses.

$$\begin{aligned}\text{Force on plunger} &= \frac{Wa}{A} \\ &= 2240 \times \left(\frac{\frac{1}{2}}{5}\right)^2 \\ &= 22.4 \text{ lb.}\end{aligned}$$

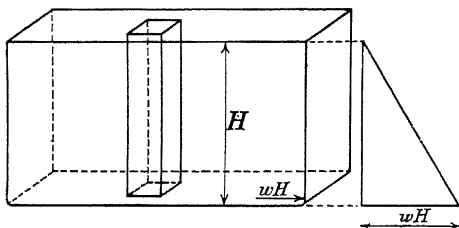


FIG. 4

As the work done by plunger equals work done by ram,

$$22.4 \times \frac{10}{12} \times n = 2240 \times 3$$

where n = No. of strokes of plunger.

$$\begin{aligned}\text{Therefore, } n &= \frac{2240 \times 3}{22.4} \times \frac{12}{10} \\ &= 360\end{aligned}$$

$$\begin{aligned}\text{Horse-power required} &= \frac{22.4 \times \frac{10}{12} \times 360}{12 \times 33,000} \\ &= .017\end{aligned}$$

5. Pressure Head of a Liquid. A liquid is subjected to pressure due to its own weight; this pressure increases as the depth of the liquid increases. Consider a vessel containing

a liquid of a depth H ft. (Fig. 4). Let w be the weight in lb. of 1 cu. ft. of the liquid. Then the pressure at any point in the liquid will depend on the weight of liquid above that point.

Consider an area of 1 sq. ft. on the bottom of the vessel. The pressure on this square foot is equal to the weight of the column of liquid above it, which it is supporting. This column is in the shape of a square prism of a height H , standing on its end.

Then, total pressure on base of prism = weight of prism

$$= wH$$

As the base has an area of 1 sq. ft., this is the intensity of pressure p .

Therefore, $p = wH$ lb. per sq. ft. (1)

If w were the weight of 1 cu. in. and H the height in inches, p would then be the intensity of pressure in lb. per sq. in.

As $p = wH$, the intensity of pressure in a liquid due to its depth will vary directly with the depth.

As the pressure at any point in a liquid depends on the height of the free surface above that point, it is sometimes convenient to express a liquid pressure by the height of the free surface which would cause that pressure.

Or, $H = \frac{p}{w}$ (From equation 1.)

The height of the free surface above any point is known as the static head at that point. In this case the static head is denoted by H .

Hence, the intensity of pressure of a liquid may be expressed as a pressure in pounds per square inch, or as an equivalent static head in feet of water; and one form may be converted to the other by means of the equation

$$p = wH$$

In using this equation care should be taken that the units of one side are the same as those of the other.

When dealing with fresh water w may be taken as 62.4 lb. per cu. ft.

Referring to Fig. 4, the intensity of pressure at any point due to the weight of liquid above that point is in a vertical direction; but, as the pressure of a liquid acts equally in all directions, this pressure will cause an equal horizontal pressure

on the side of the vessel. The intensity of pressure on the sides of the vessel will, therefore, be equal to wH at the bottom and decrease uniformly to zero at the free surface, as shown by the pressure diagram to the right of the figure.

$$\begin{aligned} \left. \begin{array}{l} \text{Then, total pressure of liquid} \\ \text{on side of vessel} \end{array} \right\} &= \text{average pressure} \times \text{area of side} \\ &= \frac{wH}{2} \times \text{area of side.} \end{aligned}$$

EXAMPLE 1.

Find the pressure in tons per sq. in. at the bottom of the sea at a point where the depth is 7 miles. The weight of 1 cu. ft. of sea water is 64 lb.

$$\begin{aligned} p &= wH \\ &= 64 \times 7 \times 5280 \text{ lb. per sq. ft.} \\ &= \frac{64 \times 7 \times 5280}{144 \times 2240} \text{ tons per sq. in.} \\ &= 7.34 \text{ tons per sq. in.} \end{aligned}$$

EXAMPLE 2.

A rectangular tank 14 ft. long and 5 ft. wide contains water to a depth of 6 ft. Find the intensity of pressure on the base of the tank and the total pressure on the end.

$$\begin{aligned} \text{Pressure on base} &= wH \\ &= 62.4 \times 6 \text{ lb. per sq. ft.} \\ &= \frac{62.4 \times 6}{144} \text{ lb. per sq. in.} \\ &= 2.6 \text{ lb. per sq. in.} \end{aligned}$$

$$\text{Maximum pressure on end} = wH$$

$$\text{Average pressure on end} = \frac{wH}{2}$$

$$\begin{aligned} \text{Total pressure on end} &= \text{average pressure} \times \text{area} \\ &= \frac{62.4 \times 6}{2} \times 5 \times 6 \\ &= 5620 \text{ lb.} \end{aligned}$$

6. Pressure of Atmosphere. The pressure of the atmosphere at the earth's surface is due to the weight of the column of air above. This cannot be calculated in the same way as a liquid because the air is compressible and, consequently, the density will vary. The pressure of the atmosphere is measured by the height of the column of liquid it will support. This will vary

slightly according to the amount of moisture in the atmosphere ; the average value may be taken as 14.7 lb. per sq. in., which is equivalent to a static head of 34 ft. of water.

The pressure of water is measured by some type of gauge. A gauge registers the pressure above atmosphere, and the pressure thus measured is termed gauge pressure. To convert gauge pressure to absolute pressure the reading of the barometer must be added.

If the pressure of the water is below atmospheric pressure it is measured by means of a vacuum gauge. A vacuum gauge gives the amount the pressure is below atmosphere ; this must be subtracted from the atmospheric pressure in order to obtain absolute pressure. Thus, if the reading of the vacuum gauge is 24 ft. of water, the absolute pressure will be $34 - 24 = 10$ ft. of water.

EXAMPLE.

The reading of the barometer is 76 cm. of mercury. If the specific gravity of mercury is 13.6, convert this pressure to feet of water and pounds per square inch.

$$\text{Centimetres of water} = 76 \times 13.6 = 1032$$

$$\text{Inches of water} = \frac{1032}{2.54} = 407$$

$$\text{Feet of water} = \frac{407}{12} = 33.85$$

$$\text{Pounds per sq. ft.} = wH = 62.4 \times 33.85 = 2112$$

$$\text{Pounds per sq. in.} = \frac{2112}{144} = 14.67$$

7. Pressure Gauges. (a) **PIEZOMETER TUBE.** The pressure in a pipe or vessel, full of a liquid, may be measured by inserting a glass tube with open ends into the vessel, vertically. The liquid will rise in the tube to a height equal to the equivalent static head of the pressure in the vessel. This simple type of pressure gauge is known as a piezometer tube.

(b) **U-TUBE.** The pressure of a fluid may be measured with a glass U-tube containing a heavier fluid which does not mix with the fluid of which the pressure is required.

Let the pipe in Fig. 5 contain water under a pressure of h in. of water, and let the U-tube contain a liquid of specific gravity s . If the left limb of the U-tube be open to the atmosphere and the right limb, containing water, be connected

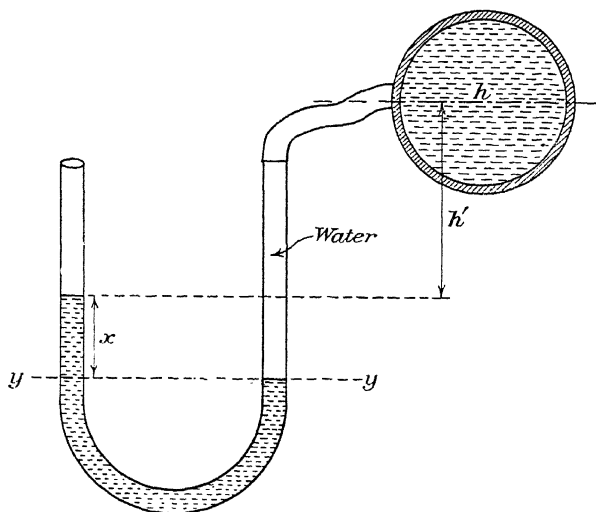


FIG. 5

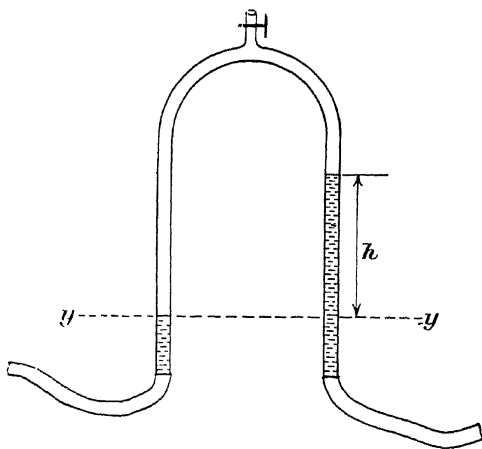


FIG. 5A

to the pipe, the pressure in the pipe will force the heavy liquid in the right limb of the U-tube downwards; this will cause it to rise by a corresponding amount in the left limb. The surface of contact between the heavy liquid and the water is known as the common surface.

Consider the horizontal section yy through the common surface.

Let h' = height of centre of pipe above liquid surface in open limb in inches.

x = height of heavy liquid in left limb above yy in inches.

As the liquid below the common surface is homogeneous, the pressure at yy in left limb must equal the pressure at yy in the right limb.

Pressure in left limb at yy ,
above atmosphere $\left. \vphantom{\begin{array}{l} \text{Pressure in left limb at } yy, \\ \text{above atmosphere} \end{array}} \right\} = xs \text{ in. of water.}$

Pressure in right limb at yy ,
above atmosphere $\left. \vphantom{\begin{array}{l} \text{Pressure in right limb at } yy, \\ \text{above atmosphere} \end{array}} \right\} = x + h' + h \text{ in. of water.}$

Equating these pressures,

$$x + h' + h = xs$$

From which $h = x(s - 1) - h'$ in. of water.

If the heavy liquid in the U-tube is mercury, $s = 13.6$.

Then, $h = x(13.6 - 1) - h'$
 $= 12.6x - h' \text{ in. of water.}$

If the pressure being measured is large, mercury should be used in the U-tube. For small pressures the liquid should be a little heavier than water.

(c) INVERTED U-TUBE. The difference of pressure between two sections of a pipe containing water may be measured by an inverted U-tube (Fig. 5A). The upper part of the tube contains air, whilst the water from the two sections of the pipe being measured passes into the left and right limb respectively.

The heights of the water columns may be adjusted to convenient heights by letting out air through the valve at the top.

As the air trapped in the upper part of the tube is under constant pressure, the difference of pressure between the sections of the pipe is equal to the difference in the heights of the two water columns.

Let h = difference of height of water columns in inches.

Then, difference of pressure = h in. of water.

(d) DIFFERENTIAL GAUGE. The inverted U-tube may be made very sensitive by having a liquid lighter than water in the upper part of the tube in place of the air.

Let s = specific gravity of liquid used.

Consider pressures above section yy (Fig. 5A).

Difference of pressure = h in. of water - h in. of liquid

$$= h - hs$$

$$= h(1 - s)$$

The nearer s is to unity, the more sensitive the instrument becomes.

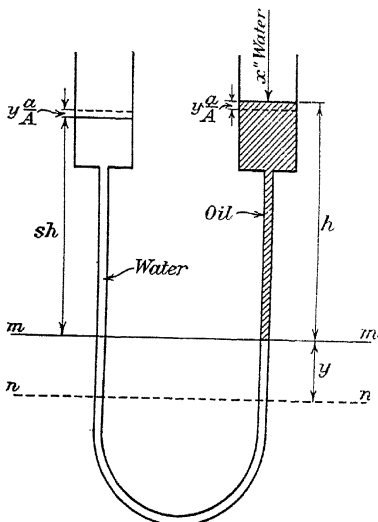


FIG. 6

All gauges which are made sensitive by using liquids of different specific gravity are known as differential gauges.

(e) OIL GAUGE WITH ENLARGED ENDS. A sensitive type of gauge may be obtained by using a U-tube with enlarged ends (Fig. 6); this type is used for measuring small differences of pressure of gases. Water and oil are placed in the limbs, the free surface of each liquid being in the enlarged ends.

Let A = area of enlarged end

a = area of tube

s = specific gravity of oil used

mm = common surface when both limbs are subjected to equal pressures.

Assume both ends of U-tube are exposed to same pressure, and that h in. be the height of free surface of oil above the common surface mm .

Then, height of free surface of
water above mm $\left. \vphantom{\begin{matrix} \text{Then, height of free surface of} \\ \text{water above } mm \end{matrix}} \right\} = sh$

Now let the surface of the oil be subjected to an additional pressure equal to x in. of water. This will cause the common surface to fall by the amount y in. to the level nn . The level of the oil in the enlarged end will consequently fall by $y \frac{a}{A}$, whilst the level of the water in the other limb will rise by the same amount.

Consider the total pressure in both limbs at the new common surface nn .

$$\begin{aligned} \text{Height of oil surface above } nn &= h + y - y \frac{a}{A} \\ &= h + y \left(1 - \frac{a}{A} \right) \end{aligned}$$

$$\begin{aligned} \text{Height of water surface above } nn &= sh + y + y \frac{a}{A} \\ &= sh + y \left(1 + \frac{a}{A} \right) \end{aligned}$$

Then, as pressures in both limbs at nn are equal,

$$sh + y \left(1 + \frac{a}{A} \right) = s \left[h + y \left(1 - \frac{a}{A} \right) \right] + x$$

both being in inches of water.

$$\text{Therefore, } y \left(1 + \frac{a}{A} \right) = sy \left(1 - \frac{a}{A} \right) + x$$

$$\text{Or, } x = y \left[1 + \frac{a}{A} - s \left(1 - \frac{a}{A} \right) \right]$$

EXAMPLE 1.

A U-tube containing mercury has its right limb open to the atmosphere. The left limb is full of water and is connected to a pipe containing water under pressure, the centre of which is level with the free surface of the mercury. Find the pressure of the water in the pipe, above atmosphere, if the difference of level of the mercury in the limbs is 2 in.

Consider a horizontal section through the common surface and consider the pressure in inches of water in each limb above this section.

Let x = pressure of water in pipe above atmosphere in inches of water.

$$\begin{aligned}\text{Pressure in left limb} &= \text{pressure in right limb} \\ x + 2 &= 13.6 \times 2 \\ x &= (13.6 - 1)2 \\ &= 25.2 \text{ in. of water}\end{aligned}$$

$$\begin{aligned}\text{Pressure in lb. per sq. in.} &= wH \\ &= \frac{62.4 \times 25.2}{144 \times 12} \\ &= .91\end{aligned}$$

EXAMPLE 2.

A pressure gauge consists of two cylindrical bulbs A and B , each of 1 sq. in. cross-sectional area, which are connected by a U-tube with vertical limbs, each of .025 sq. in. cross-sectional area. A red liquid of specific gravity .95 is filled into A and a clear liquid of specific gravity .9 is filled into B , the surface of separation being in the limb attached to B . Find the displacement of the surface of separation when the pressure on the surface in A is greater than that in B by an amount equivalent to 1 in. head of water. (London Univ., 1911.)

Consider gauge when pressure in bulb A equals pressure in bulb B .

Let h = height of liquid in A above common surface.

Then, height of liquid in B above common surface

$$= \frac{.95}{.9} h$$

Now let pressure of 1 in. of water act on liquid in A .

Let this cause the common surface to rise x in.

Then, surface of liquid in A will fall $\frac{x}{40}$ in. and surface of liquid in B will rise $\frac{x}{40}$ in.

Consider pressures in each limb above new common surface.

$$\left. \begin{array}{l} \text{Height of liquid in bulb } A \text{ above} \\ \text{new common surface} \end{array} \right\} = h - x - \frac{x}{40} \text{ in.}$$

$$\left. \begin{array}{l} \text{Height of liquid in bulb } B \text{ above} \\ \text{new common surface} \end{array} \right\} = \frac{.95}{.9} h - x + \frac{x}{40} \text{ in.}$$

$$\text{Total pressure of } A = \text{total pressure of } B$$

$$.95 \left[h - x - \frac{x}{40} \right] + 1 = .9 \left[\frac{.95}{.9} h - x + \frac{x}{40} \right]$$

$$-.95x \left(1 + \frac{1}{40} \right) + 1 = -.9x \left(1 - \frac{1}{40} \right)$$

$$x = 10.41 \text{ in.}$$

8. **Total Pressure on an Immersed Surface.** As the static pressure of water varies with the depth, the intensity of

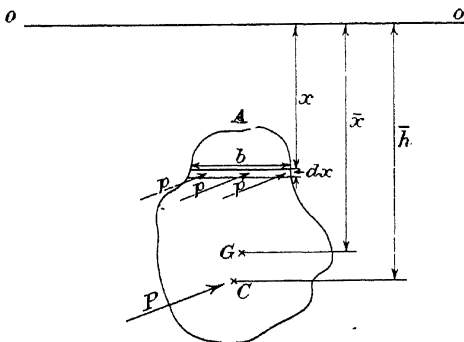


FIG. 7

pressure on an immersed surface will not be uniform, but will vary with the depth.

Consider any vertical surface immersed in water (Fig. 7).

Let A = area of surface

G = centre of area of surface

\bar{x} = depth of centre of area

oo be the free surface of the water

P = total pressure of water on the surface

Consider a thin horizontal strip of the surface of thickness dx and breadth b . Let the depth of this strip be x .

Let intensity of pressure on strip be p ; this may be taken as uniform as the strip is extremely narrow.

Then, $p = wx$

where w is the density of the water.

Area of strip $= b.dx$

Total pressure on strip $= p.b.dx$
 $= w.x.b.dx$

Total pressure on whole area $= P = w \int b.dx.x$

But, $\int b.dx.x = \text{1st Moment}$
 $= A\bar{x}$

Therefore, $P = wA\bar{x}$ (1)

Or, the total pressure on an immersed surface is equal to the area multiplied by the intensity of pressure at the centre of area of the figure.

This equation will hold for all surfaces, whether flat or curved.

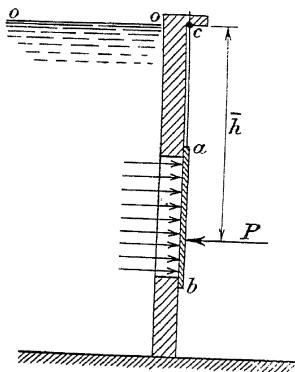


FIG. 8

EXAMPLE.

A vertical square sluice is situated with its top edge 10 ft. below the level of the water ; the sluice is 3 ft. square. Find the total pressure on the sluice.

Depth of centre of area
 $= 10 + 1\frac{1}{2} = 11\frac{1}{2}$ ft.

Area of sluice
 $= 9$ sq. ft.

Total pressure
 $= wA\bar{x}$ (From Eq. 1)
 $= 62.4 \times 9 \times 11\frac{1}{2}$
 $= 6460$ lb.

9. **Centre of Pressure.** The intensity of pressure on an immersed surface is not uniform but increases with the depth. As the pressure will be greatest over the lower portion of the figure it follows that the resultant pressure will act at some point towards the lower edge of the figure. The problem is to find the point of application of the resultant pressure on the surface ; this point is known as the centre of pressure.

As an example of the meaning of centre of pressure, consider the diagram in Fig. 8. This represents a wall with water on the left-hand side only; the surface of the water being at oo . The wall contains an opening below the water level through which the water is prevented from flowing by the gate ab , which is freely suspended by a cord at c . The point c is on the water level. The pressure of the water is tending to swing the gate outwards about the pivot c ; to prevent this let a force P be applied to the gate as shown in the figure. P will equal the total water pressure on the gate. There is only one point on the gate at which P may be applied which will keep the gate perfectly closed; that point is the centre of pressure. If P were applied above this point the gate would open outwards at the bottom; if P were applied below the centre of pressure the gate would open outwards at the top. Thus, the moment of P about the pivot c must equal the sum of all the moments of the water pressures on the gate about the water surface. Therefore, the depth of the centre of pressure may be found by taking moments about the water surface.

Referring to Fig. 7, let C be the centre of pressure of the immersed figure. Then the resultant pressure P will act through this point.

Let \bar{h} = depth of centre of pressure below free surface

I_0 = moment of inertia of figure about oo .

Consider the horizontal strip of thickness dx .

Force on strip = $w.x.b.dx$ (as in Art. 8)

Moment of force on strip
about free surface oo = $w x^2 b dx$

Total moment of forces
for whole area } = $w \int b.dx.x^2$

But, $\int b.dx.x^2$ = 2nd moment
= I_0

Therefore, total moment = $w I_0$

But, moment due to
resultant pressure
about oo } = $P h$

Therefore, $P\bar{h} = wI_0$

Or, $\bar{h} = \frac{wI_0}{P}$

But, $P = wA\bar{x}$ (Eq. 1, Art. 8)

Therefore, $\bar{h} = \frac{I_0}{A\bar{x}}$ (1)

Or, the depth of centre of pressure = $\frac{\text{2nd moment}}{\text{1st moment}}$.

The value of I_0 may be obtained from the theorem :

$$I_0 = I_g + A\bar{x}^2$$

where I_g is the moment of inertia of the figure about a horizontal axis through its centre of area.

EXAMPLE.

A circular plate 6 ft. diameter is placed vertically in water so that the centre of the plate is 4 ft. below the surface. Find the depth of the centre of pressure and the total pressure on the plate.

$$\begin{aligned} I_g &= \frac{\pi d^4}{64} \\ &= \frac{\pi 6^4}{64} = 63.6 \text{ ft.}^4 \end{aligned}$$

$$\text{Area of plate} = \frac{\pi}{4} 6^2 = 28.22 \text{ sq. ft.}$$

$$\bar{x} = 4 \text{ ft.}$$

Also, $I_0 = I_g + A\bar{x}^2$
 $= 63.6 + (28.22 \times 16) = 515.6 \text{ ft.}^4$

$$\begin{aligned} \bar{h} &= \frac{I_0}{A\bar{x}} \\ &= \frac{515.6}{28.22 \times 4} = 4.56 \text{ ft.} \end{aligned}$$

$$\begin{aligned} \text{Total pressure on plate} &= wA\bar{x} \\ &= 62.4 \times 28.22 \times 4 \\ &= 7050 \text{ lb.} \end{aligned}$$

10. Centre of Pressure for an Inclined Surface. The depth of the centre of pressure for a surface inclined to the water surface may be found by taking moments about the point of intersection of the plane of the inclined surface and the water surface.

Referring to Fig. 9, let mn represent the inclined surface, the view of which is shown projected.

Let B = point of intersection of surface produced with water surface

θ = Angle of inclination of immersed surface.

Consider a thin horizontal strip of area of distance x from B . Then, using same notation as Art. 8 and 9,

$p = wx \sin \theta$, and acts normal to surface

Area of strip $= bdx$

Force on strip $= p bdx$

$= wx \sin \theta b dx$

Total force on surface $= P = w \int b dx x \sin \theta$

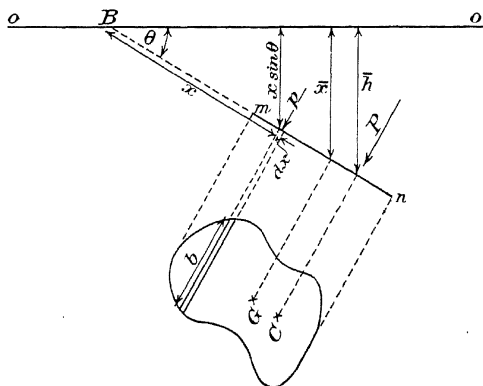


FIG. 9

But $\int b dx x = \text{1st moment about } B$
 $= \frac{A \bar{x}}{\sin \theta}$

Therefore, $P = w A \bar{x} \sin \theta$ (1)

Taking moments about B ,

Moment of force on strip $= w x \sin \theta b dx x$.

Sum of moments of forces
 on strip $\left. \vphantom{\sum} \right\} = w \sin \theta \int b dx x^2$

Let $I_B = \text{moment of inertia of surface about } B$

Then, $I_B = \int b dx x^2$

Therefore, total moment $= w \sin \theta I_B$

But, total moment $= \frac{P\bar{h}}{\sin \theta}$

Therefore, $\frac{P\bar{h}}{\sin \theta} = w \sin \theta I_B$

Or, $\bar{h} = \frac{w I_B \sin^2 \theta}{P}$

Substituting for P from Equation (1),

$$\bar{h} = \frac{I_B \sin^2 \theta}{A\bar{x}} \quad . \quad . \quad . \quad . \quad (2)$$

where $I_B = I_G + \frac{A\bar{x}^2}{\sin^2 \theta}$

It will be noticed that if $\theta = 90^\circ$, Equation (2) becomes the same as Equation (1) of Art. 9.

EXAMPLE.

Find (a) the total pressure, and (b) the position of the centre of pressure on one side of an immersed rectangular plate, 6 ft. long and 3 ft. wide, when the plane of the plate makes an angle of 60° with the surface of the water and the 3 ft. edge of the plate is parallel to, and at a depth of $2\frac{1}{2}$ ft. below, the surface level of the water.

If you employ any formula you must prove its correctness. (London Univ.)

(b) Using Equation (2),

$$\bar{h} = \frac{I_B \sin^2 \theta}{A\bar{x}}$$

Where $A = 18$ sq. ft.

$$\theta = 60^\circ$$

$$\bar{x} = 2.5 + 3 \sin 60^\circ = 5.1 \text{ ft.}$$

$$\begin{aligned} I_B &= I_G + \frac{A\bar{x}^2}{\sin^2 60^\circ} \\ &= \frac{3 \times 6^3}{12} + \frac{18 \times 5.1^2}{.75} = 678 \text{ ft.}^4 \end{aligned}$$

$$\bar{h} = \frac{678 \times .75}{18 \times 5.1} = 5.53 \text{ ft.}$$

(a) Using Equation (1),

$$P = w A\bar{x}$$

$$= 62.4 \times 18 \times 5.1 = 5725 \text{ lb.}$$

11. **The Pressure on Lock Gates.** A practical problem on the centre of pressure is encountered in finding the forces on

a lock gate. The plan of a pair of lock gates is shown in Fig. 10. AB and BC represent the gates which are held in contact at B by the water pressure, the water level being higher on the left-hand side of the gates. The gates are hinged at top and bottom at A and C .

Consider the forces acting on the gate AB .

The water pressure acts with a resultant force P at the centre of the gate and normal to it. The gate BC acts on it with a pressure T which is normal to the surface of contact of the two gates. The two hinges on the side A will react with a total force R , the direction of which is not yet known. As the gate is in equilibrium under these three forces, they will all intersect at one point. Let P and T intersect at D ; then R must pass through this point. Thus, the gate is in equilibrium

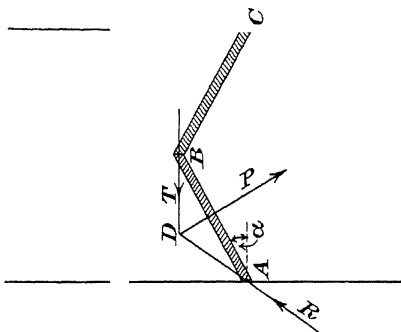


FIG. 10

under the action of three forces intersecting at D . Let α = angle of inclination of gate to the normal of side of lock. Then, triangle ADB will be isosceles, as angles DBA and DAB equal α

Resolving the forces at D in a direction parallel to gate,

$$R \cos \alpha = T \cos \alpha$$

Therefore,

$$R = T$$

Resolving normal to gate,

$$\begin{aligned} P &= (R + T) \sin \alpha \\ &= 2R \sin \alpha \end{aligned}$$

$$\text{Or, } R = \frac{P}{2 \sin \alpha}$$

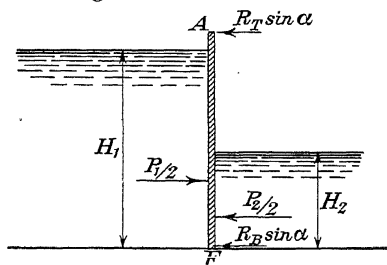


FIG. 11

Also, inclination of R to centre line of gate = α .

Next consider the water pressure on the gate. Fig. 11 is a view of the gate in the direction AB .

Let H_1 = height of water to left of gate
 H_2 = height of water to right of gate
 H = height of top hinge from bottom of gate
 P_1 = total pressure of water to left of gate
 P_2 = total pressure of water to right of gate
 R_T = reaction of top hinge
 R_B = reaction of bottom hinge

Then, $R_T + R_B = R$

Also, $P_1 = \frac{w H_1}{2} \times \text{wetted area of gate}$

and, $P_2 = \frac{w H_2}{2} \times \text{wetted area of gate}$

then, $P = P_1 - P_2$

P_1 will act at the centre of pressure which is $\frac{H_1}{3}$ from bottom.

Also, P_2 will act at $\frac{H_2}{3}$ from bottom.

It will be noticed that only half the water pressure may be taken as acting on the hinge edge of the gate; the remaining half will be taken by the reaction of the gate BC .

Taking moments about F (Fig. 11),

$$R_T \sin \alpha H = \left(\frac{P_1}{2} \times \frac{H_1}{3} \right) - \left(\frac{P_2}{2} \times \frac{H_2}{3} \right) \quad . \quad . \quad . \quad (1)$$

Resolving horizontally,

$$\frac{P_1}{2} - \frac{P_2}{2} = R_B \sin \alpha + R_T \sin \alpha \quad . \quad . \quad . \quad . \quad (2)$$

Then, from Equations (1) and (2), R_T and R_B may be found.

12. Water Pressure on Masonry Dams. Fig. 12 shows the section of a masonry dam having a sloping back; let the height of the water be H . The total pressure P on the dam will act at the centre of pressure C , the height of C being one-third H , and will act normal to the surface. The weight of the masonry W will act at the centre of area of the cross-section of the dam.

Produce the forces P and W to intersect at a .

Let ab represent P and let ad represent W to the same scale. These are the only forces acting on the dam. Complete the

parallelogram and draw the diagonal ae . Then ae gives the magnitude and direction of the resultant force R .

Let the point at which the resultant force cuts the base of the dam be f . Then, in order to keep the stresses on the base of the dam within certain limits, f must fall within a certain distance from the centre of the base.

The above method investigates the strength of the base of the dam only; it is necessary to extend this method to other horizontal sections and so test the strength of the dam at all heights, and for all depths of water.

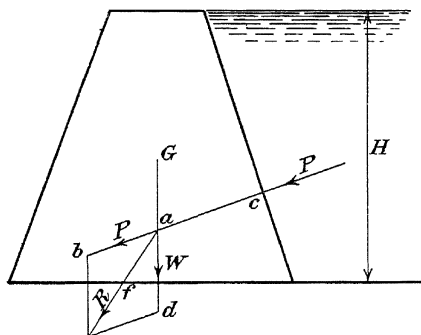


FIG. 12

Consider the section of the dam in Fig. 13, and assume, in the first case, the dam to be full. Consider the horizontal section line bb as the base of the dam, as in the previous problem, and find the point at which the resultant force cuts the section line. To do this, let G_1 be the centre of area above bb and W_1 its weight; let P_1 be the water pressure above bb acting at one-third of the height above bb .

Next consider the whole section of the dam above cc . This gives a new centre of area G_2 , a new weight W_2 , and a new pressure P_2 . Find the point on cc at which the resultant of W_2 and P_2 cuts the line. Repeat this by considering the whole section above dd and ee in turn. Mark clearly the point at which each resultant cuts its own section line and draw a smooth curve through these points. This curve is known as the line of pressure for the dam when full; and for any horizontal section line, this curve must cut the line within a given distance from the centre.

It is next required to draw the line of pressure for the dam when empty. In this case there will be no water pressure acting, the only force being the weight of the masonry. The point at which the resultant cuts the base is now where W_1 cuts bb , where W_2 cuts cc , etc. By drawing a smooth curve to pass through these points, the line of pressure for dam when empty is obtained. This curve, also, must cut any horizontal section line within a given distance from the centre.

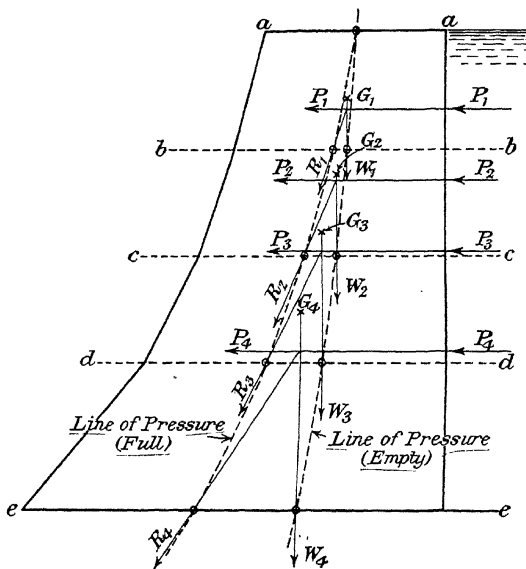


FIG. 13

It will be noticed that the centre point of the top of the dam, aa , will be the required point for both lines of pressure at this section.

In all problems dealing with masonry dams it is usual to calculate all the forces on a length of 1 ft.

EXAMPLES.

(1) A diver is working on the sea bottom at a depth of 74 ft. What is the pressure, above atmosphere, in pounds per square inch, at this depth? 1 cu. ft. sea water weights 64 lb.

Ans.—32.9 lb. per sq. in.

(2) The pressure of a gas is measured by a U-tube containing water, which has one limb open to the atmosphere, and is found to be 2.6 in. of water. The barometer reading is 76 cm. of mercury. Express the pressure of this gas in pounds per square inch—(1) as gauge pressure, (2) as absolute pressure. The specific gravity of mercury is 13.6.

Ans.—(1) .0939 lb. per sq. in. (2) 14.7639 lb. per sq. in.

(3) A hydraulic press has a ram of 4 in. diameter and a piston of $\frac{3}{8}$ in. diameter. What load on the ram can be lifted by a force of 25 lb. on the piston?

Ans.—2,840 lb.

(4) A masonry dam of rectangular section of 20 ft. high and 10 ft. wide has the water level with its top. Find (1) the total pressure on 1 ft. length of the dam; (2) the height of the centre of pressure; (3) the point at which resultant cuts the base. The weight of 1 cu. ft. of masonry is 110 lb.

Ans.—(1) 12,480 lb. (2) 6.67 ft. (3) 3.78 ft. from centre.

(5) A hollow triangular box, the ends of which are equilateral triangles of 4 ft. sides, is submerged in water so that one of its rectangular faces lies in the surface of the water. Find the net total pressure, and the position of the centre of pressure on one of the triangular ends, (a) when the inside of the box is at atmospheric pressure; (b) when the inside of the box is at a pressure of 1 lb. per sq. in. above the atmospheric pressure. (London Univ.)

Ans.—(a) 496 lb.; 1.735 ft. from surface. (b) 500 lb.; .585 ft. from surface.

(6) A pressure gauge, for use in a stokehold, is made of a glass U-tube with enlarged ends, one of which is exposed to the pressure in the stokehold and the other connected to the outside air. The gauge is filled with water on one side, and oil having a specific gravity of .95 on the other—the surface of separation being in the tube below the enlarged ends. If the area of the enlarged end is 50 times that of the tube, how many inches of water pressure in the stokehold correspond to a displacement of 1 in. in the surface of separation? (London Univ., 1916.)

Ans.—0.89 in.

(7) A circular plate 5 ft. diameter is immersed in water, its greatest and least depths below the surface being 6 ft. and 3 ft. respectively; find (a) the total pressure on one face of the plate; (b) the position of the centre of pressure. (London Univ., 1912.)

Ans.—(a) 5,520 lb. (b) 4.63 ft. below surface

(8) Each gate of a lock is 20 ft. high and 6 ft. wide, and is supported on pivots, situated 2 ft. from the top and bottom. The angle between the gates when they are closed is 140° . If the depths of water on the two sides are 17 ft. and 5 ft. respectively, find the magnitude and position of the resultant water pressure on each gate, the magnitude of the reaction between the gates, and the magnitude and directions of the reactions at the pivots, on the assumption that the gate reaction acts in the same horizontal plane as the resultant water pressure. (London Univ., 1919.)

Ans.—49,500 lb.; 6.04 ft. from bottom; 72,550 lb.; 18,150 lb. (top); 54,400 lb. (bottom); 20° to gate.

(9) A rectangular sluice-gate 6 ft. square has its upper edge submerged to a depth of 6 ft. Determine the magnitude of the resultant pressure on one face, and the centre of pressure. (A.M.I. Mech. E., 1922.)

Ans.—20,200 lb.; $9\frac{1}{2}$ ft.

(10). A hemispherical tank, 5 ft. in diameter, is full of water. Determine—(1) The resultant pressure on the wetted surface; (2) the total pressure on the wetted surface; (3) the centre of pressure on the wetted surface. (A.M.I. Mech. E., 1922.)

Ans.—(1) 2,040 lb. (2) 3,060 lb. (3) 2.5 ft.

(11) A bulkhead closing one end of a floating dock is 30 ft. wide at the bottom and 60 ft. at the top, and is 30 ft. deep. If submerged up to its upper edge, what is the pressure on the bulkhead, and what will be the depth of the centre of pressure? (A.M.Inst.C.E., 1925.)

Ans.—1,122,000 lb.; 18.75 ft.

(12) A 10 ft. length of a semicircular culvert 6 ft. in diameter has bulkheads at each end. If filled with water determine (a) the resultant force exerted by the water on the wetted surfaces; (b) the total pressure exerted on these surfaces. (A.M.I.Mech.E., 1926.)

Ans.—(a) 8,810 lb.; (b) 13,450 lb.

(13) Describe with sketches some form of differential gauge capable of enabling very small differences of head in a pipe to be measured. Explain the theory of its action. (A.M. Inst. C.E., 1925.)

(14) A circular drum, 4 ft. in diameter and 10 ft. long, rests with its axis horizontal on the bottom of a dock in which the depth of water is 10 ft. Determine: (a) The total pressure on the surface of the drum; (b) the resultant pressure on the surface of the drum; (c) the depth of the centre of pressure on each of the flat ends. (A.M.I. Mech. E., 1926.)

Ans.—(a) 74,060 lb.; (b) 7,820 lb.; (c) 8.125 ft.

CHAPTER II

THE BUOYANCY OF A LIQUID

13. Buoyancy. If a body is floating in a fluid and is at rest, it will be in equilibrium in a vertical plane; then the total upward force must equal the total downward force. This is true whether the body be immersed in a liquid or a gas. The downward force on the body will be due to gravity, whilst the upward force will be the resultant upward pressure of the fluid in which the body is floating. This resultant upward pressure is known as the buoyancy.

Consider a body immersed in a fluid, and let oo be the surface of the fluid (Fig. 14). Consider a vertical prism of the body of height H and end area a . Let p be the intensity of pressure of the fluid on the upper end of the prism. Then the intensity of pressure on the lower end of the prism will be $p + wH$, the additional amount wH being due to the additional depth H of the fluid.

Total downward pressure of fluid on prism $= pa$

Total upward pressure of fluid on prism $= (p + wH)a$

Resultant upward pressure of fluid on prism $= (p + wH)a - pa$
 $= wHa$

But, volume of prism $= Ha$

Therefore, resultant upward pressure $= w \times \text{volume of prism}$
 $= \text{weight of fluid displaced by prism.}$

If the whole body is imagined to be made up of similar vertical prisms, it follows that the total resultant upward pressure of the fluid will equal the weight of fluid displaced by the body. This is known as Archimedes' principle.

EXAMPLE.

The volume of the displacement of a ship in sea water is 4,000 cu. ft., find the weight of the ship if 1 cu. ft. sea water weighs 64 lb. Find also the volume of the displacement in fresh water.

Weight of ship = weight of sea water displaced

$$= \frac{64 \times 4000}{2240} = 114.2 \text{ tons.}$$

$$\begin{aligned} \text{Volume of fresh water displacement} &= \frac{114.2 \times 2240}{62.4} \\ &= 4,100 \text{ cu. ft.} \end{aligned}$$

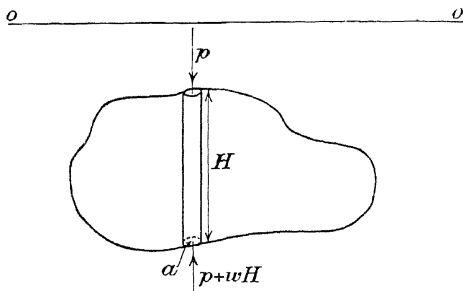


FIG. 14

14. Centre of Buoyancy. When a body is floating in a liquid, a normal pressure will be exerted by the liquid at all points on the surface of the body. The resultant of all these normal pressures will be vertically upwards and will act at the centre of gravity of the volume of liquid displaced by the body; this point is known as the centre of buoyancy. When dealing with a transverse section of a floating body, the centre of buoyancy will be at the centre of area of the immersed section.

Referring to the transverse section of the ship in Fig. 17, let ac be the water line; then the immersed section will be the area $acde$. The centre of buoyancy will be at the centre of area of this immersed section and is denoted by the point B_1 . If the ship rolls in a clockwise direction, as shown by the dotted position (Fig. 17), the immersed section will now be acd_1e_1 , and the centre of buoyancy will be at the centre of area of this new immersed section.

15. Conditions of Equilibrium of a Floating Body. There are three conditions of equilibrium for a floating body: stable, unstable, and neutral. If the floating body is given a slight angular displacement, such as the rolling of a ship, after which

it returns to its original position, the body is said to be stable. If, on being given a slight displacement, it heels farther over, it is said to be in unstable equilibrium. But if the body is given a small displacement into a new position and it remains at rest in that new position, the body is then said to be in neutral equilibrium.

Referring to Fig. 15, let $abcd$ represent the transverse section of a ship floating in water the surface of which is represented by the line oo . Let G be the centre of gravity of the ship and its contents. The position of G is known; it is calculated from the known weights of the materials used

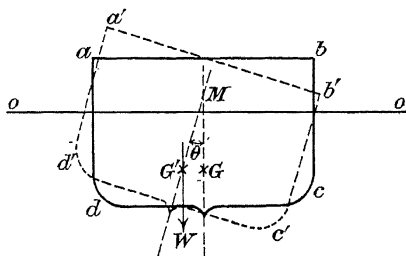


FIG. 15

for the construction of the ship and from the position of its contents. For an infinitely small displacement, the ship is assumed to swing about a fixed point, the position of which it is required to find. This imaginary pivot is called the metacentre and is represented by M . It should be understood that in the rolling of a ship the metacentre may only be assumed to be a fixed point for small displacements, it may be looked upon as the instantaneous centre of rotation of the ship when heeling. Let the ship be displaced through an angle θ into the position $a'b'c'd'$; then G will have moved to G' . Let W be the weight of the ship; this will act vertically downwards through G' .

Then, horizontal displacement of $G = GM \tan \theta$ (approximately). Thus, there will be a moment of $W \times GM \tan \theta$ tending to swing the ship back to its original position. This moment is known as the righting moment, or righting couple.

The ship may, therefore, be regarded as a pendulum suspended at M , and the point G corresponding to the bob. The problem is to find the position of the metacentre M .

Now, the righting moment is $W \times GM \tan \theta$, so that if M is above G the ship will return to its original position and is, therefore, stable. If M is below G , the moment due to W would cause the ship to turn completely over. In this case the ship would be unstable. In the case when M coincides with G the ship is in neutral equilibrium, for there would then be no moment acting on the ship.

In order to ensure that a ship is perfectly stable, M should be a certain distance above G . The height of M above G is

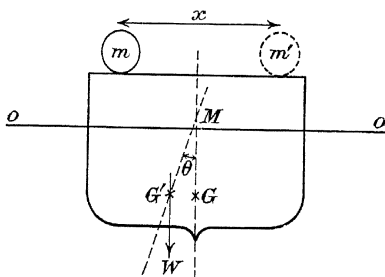


FIG. 16

known as the metacentric height.

The term "metacentre" was first defined by Bougier* in 1746. Bougier's definition was that the metacentre is the point at which the vertical through the centre of buoyancy intersects the vertical centre line

of the ship's section, after a small angle of heel. Actually, the ship will rotate about the water-line, but as the definition of metacentre is for an infinitely small angle of heel, the problem will not be affected whether the ship be assumed to rotate about the metacentre or the water-line.†

The metacentric height of a floating body can be determined both by calculation and by experiment.

16. The Experimental Determination of the Metacentric Height. The metacentric height of a ship or pontoon may be found experimentally whilst the vessel is floating; the position of the centre of gravity must be known beforehand.

Let W be the weight of the ship (Fig. 16), which is known, and let G be the centre of gravity. Let a known movable weight m be placed on one side of the ship.

A pendulum consisting of a weight suspended by a long cord is placed in the ship and the position of the bob when at rest is marked. Let l be the length of the pendulum. The

* *Traité du navire*, by Bougier.

† For full discussion on stability of ships see Sir William White's *Naval Architecture*.

weight m is then moved across the deck through the distance x , the new position of m being denoted by m' . This will cause the ship to swing through a *small* angle θ about its metacentre M . Then, as the pendulum inside the ship still remains vertical, the angle θ may be measured by the apparent deflection of the pendulum.

Let apparent horizontal displacement of pendulum weight = y .

Then,
$$\tan \theta = \frac{y}{l}$$

Referring to Fig. 16, the moment caused by W about M equals the moment about M caused by moving m to m' .

Or,
$$W \times GM \tan \theta = mx$$

From which
$$GM = \frac{mx}{W \tan \theta} \quad . \quad . \quad . \quad (1)$$

and, as all the quantities on the right of this equation are known, the metacentric height can be calculated.

EXAMPLE.

Define the term "metacentric height" in connection with a floating body. Obtain an equation giving the metacentric height and apply it in the case of a ship which displaces 3,000 tons of sea water and which heels over $\frac{1}{10}$ when a load of 15 tons is shifted across the deck a distance of 30 ft. (London Univ., 1919.)

Taking moments about M (Fig. 16),

$$\text{Moment due to } W = \text{moment due to}$$

$$W GM \tan \theta = mx$$

$$3000 GM \frac{1}{30} = 15 \times 30$$

$$\begin{aligned} GM &= \frac{15 \times 30 \times 30}{3000} \\ &= 4.5 \text{ ft.} \end{aligned}$$

17. Analytical Method for Metacentric Height. An equation for the metacentric height of a floating body may be obtained if the position of the centre of gravity G is known. Consider the transverse section of the ship of Fig. 17; let the ship heel in a clockwise direction through a small angle θ (radians). The immersed section has now changed from the area of $acde$ to the dotted position acd_1e_1 . The new centre of buoyancy is B_1 ; the old centre of buoyancy, relative to the ship, is B ; hence the centre of buoyancy has moved from B

to B_1 , relative to the ship. It will be noticed that the effect of the heeling is to move an immersed wedge from one side of the ship to the other; that is, the immersed wedge aom now occupies the position con . The apparent movement of this wedge across the ship causes the centre of buoyancy to move from B to B_1 ; these movements, of course, being relative to the ship. From the effect of these two movements the required equation may be obtained.

As the volume of water displaced remains constant, the shaded area aom must equal the shaded area con ; hence the

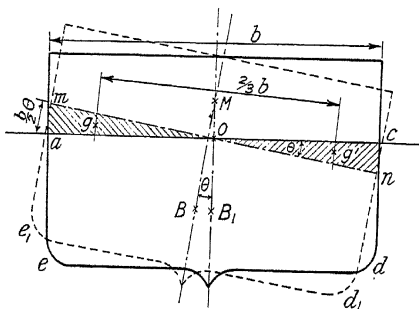


FIG. 17

old water-line mn will pass through the point o . From this, it follows, that the ship is rotating about the point O ; but for the extreme case of θ being infinitesimally small, the same result is obtained whether the ship be assumed to rotate about M or O .

Let l be the length of the ship and consider a thin transverse slice of length dl .

Let b = breadth of ship.

V = volume of water displaced by whole ship.

dV = volume of water displaced by slice considered.

I = moment of inertia of a horizontal section of ship at water line about a longitudinal axis.

dI = moment of inertia of slice considered about a longitudinal axis.

g and g' = centres of gravity of triangular prisms aom and con respectively.

Then, weight of ship $= wV$

weight of slice considered $= wdV$

distance between g and $g' = \frac{2}{3}b$

$$am = cn = \frac{b}{2}\theta$$

volume of wedge of slice $= \frac{1}{2} \times \frac{b}{2} \times \frac{b}{2} \theta \times dl$

weight of wedge of slice $= \frac{wb^2\theta dl}{8}$

Also,
$$dI = \frac{\text{breadth} \times (\text{depth})^3}{12} - \frac{dl \times b^3}{12}$$

Taking moments about M ,

moment caused by moving triangular prism of water from g to g' $= \left\{ \begin{array}{l} \text{moment caused by moving} \\ \text{upward thrust of water} \\ \text{from } B \text{ to } B_1. \end{array} \right.$

That is, $wb^2\theta dl \times \frac{2}{3}b = wdV \times BB_1$

Or, $w \left(\frac{dl \times b^3}{12} \right) \theta = wdV \times (BM \times \theta)$

Hence, $dI = BM \times dV$

Integrating for whole length of ship,

$$I = BM \times V$$

Or, $BM = \frac{I}{V} \quad . \quad . \quad . \quad . \quad (1)$

Then, metacentric height $= GM = BM - BG$.

Hence, as BG is known, the metacentric height can be obtained.

The moment of inertia I is actually the moment of inertia of the horizontal section of the ship at the water line. Usually the sides of a vessel are vertical at this section, so that I may be taken as the moment of inertia of the deck about a longitudinal axis. Referring to the plan of the vessel shown in Fig. 18, in order to find the moment of inertia of this figure about the axis oo it would be necessary to divide the section up into small

horizontal rectangles and to add together their moments of inertia. Sometimes, the moment of inertia of the deck of a ship is given as a function of the moment of inertia of the circumscribing rectangle.

Let l = length of ship (Fig. 18)

Then, moment of inertia of circumscribing rectangle $\frac{l b^3}{12}$

And, $I = k \frac{l b^3}{12}$

where k is a coefficient depending on the shape of the ship.

In the case of a pontoon, the deck will be rectangular; then k will equal unity.

This method may be applied if the angle of heel is less than 10° . As the moment of inertia of the ship's water plane is not constant, but increases with the angle of heel, the metacentric height will increase as the angle of heel increases.

The metacentric height of large ships varies between $1\frac{1}{2}$ ft. and 4 ft.

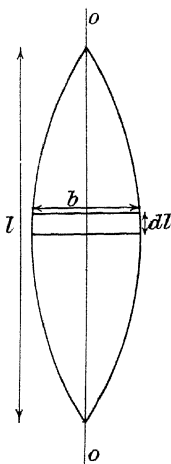


FIG. 18

EXAMPLE 1.

A vessel has a length of 200 ft., a beam of 28 ft., and a displacement of 1,350 tons. A weight of 20 tons moved $22\frac{1}{2}$ ft. across the deck inclines the vessel 5° . The second moment of the load waterplane about its fore and aft axis is 65 per cent of the second moment of the circumscribing rectangle, and the position of the centre of buoyancy is 5 ft. below the water line. Find the position of the metacentre and the centre of gravity of the vessel. The weight of 1 cu. ft. of sea water can be taken as 64 lb. (London Univ., 1915.)

From Equation (1), Art. 15,

$$\begin{aligned} GM &= \frac{mx}{W \tan \theta} \\ &= \frac{20 \times 22.5}{1350 \times .0875} \\ &= 3.81 \text{ ft.} \end{aligned}$$

$$\begin{aligned}
 \text{Volume of displacement} = V &= \frac{W}{w} \\
 &= \frac{1350 \times 2240}{64} \\
 &= 47,200 \text{ cu. ft.} \\
 I &= k \cdot \frac{lb^3}{12} \\
 &= \frac{.65 \times 200 \times 28^3}{12} = 238,000 \text{ ft.}^4
 \end{aligned}$$

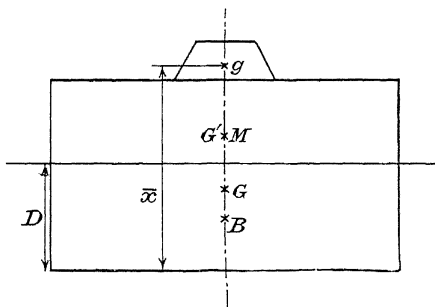


FIG. 19

From Equation (1),

$$\begin{aligned}
 BM &= \frac{I}{V} \\
 &= \frac{238,000}{47,200} \\
 &= 5.05 \text{ ft.}
 \end{aligned}$$

Position of $M = 5.05 - 5 = .05$ ft. above water line

Position of $G = 3.81 - .05 = 3.76$ ft. below water line

EXAMPLE 2.

State the condition for the stability of a floating body; and find an expression for the distance between the centre of buoyancy and the meta-centre, in terms of the second moment of the water-plane area and the volume of displacement. A cylindrical buoy floats in salt water. It is 6 ft. diameter and 4 ft. long, and weighs 2,500 lb. The C.G. is 1.5 ft. from the bottom. If a load of 500 lb. is placed on the top, find the maximum height of its C.G. above the bottom, so that the buoy may remain in stable equilibrium. [Weight of 1 cu. ft. of salt water, 64 lb.] (London Univ., 1917.)

The floating buoy is shown in Fig. 19.

Let G = centre of gravity of buoy

g = centre of gravity of weight on top

G' = centre of gravity of buoy plus weight

D = depth of buoy below water line

Then, height of B from bottom $= \frac{D}{2}$

Let \bar{x} = required height of centre of gravity of weight.

Then, \bar{x} will be a maximum when the buoy reaches the state of neutral equilibrium. That is, when G' and M coincide.

Total weight of buoy plus load $= 2500 + 500$
 $= 3000$ lb.

Volume of water displaced $= V = \frac{3000}{64} = 46.9$ cu. ft.

$$D = \frac{V}{\text{area of base}}$$

$$= \frac{46.9}{\frac{\pi}{4} \times 6^2} = 1.66 \text{ ft.}$$

Then, height of $B = \frac{1.66}{2} = .83$ ft.

Using Equation (1),

$$BG' = BM = \frac{I}{V} = \frac{\pi (\text{diameter})^4}{64 V}$$

$$= \frac{\pi \times 6^4}{64 \times 46.9} = 1.355 \text{ ft.}$$

Height of G' above bottom $= 1.355 + .83 = 2.185$ ft.

In order to find \bar{x} take moments about the bottom of cylinder.

$$500 \bar{x} = (3000 \times 2.185) - (2500 \times 1.5)$$

$$\bar{x} = 5.61 \text{ ft.}$$

EXAMPLES.

(1) A ship has a displacement of 2,200 tons in sea water. Find the volume of the ship below the water line. 1 cu. ft. of sea water weighs 64 lb.

Ans.—77,000 cu. ft.

(2) A solid cube of wood of specific gravity of .9 floats in water with a face parallel to water plane. If the length of one edge is 4 in., find the metacentric height.

Ans.—17 in.

(3) A pontoon of 1,500 tons displacement floats in fresh water. A weight of 18 tons is moved 24 ft. across the deck; this causes a pendulum 10 ft. long to move $4\frac{1}{2}$ in. horizontally. Find the metacentric height of the pontoon.

Ans.—7.68 ft.

(4) A rectangular pontoon weighing 240 tons has a length of 60 ft. The centre of gravity is 1 ft. above the centre of the cross section, and the metacentric height is to be 4 ft. when the angle of heel is 10° . The freeboard must not be less than 2 ft. when the pontoon is vertical. Find the breadth and height of the pontoon, if floating in fresh water.

Ans.—21.8 ft. and 8.6 ft.

(5) State the conditions which govern the stability or instability of a floating vessel.

A buoy carrying a beacon light has the upper portion cylindrical, 7 ft. diameter and 4 ft. deep. The lower portion, which is curved, displaces a volume of 14 cu. ft., and its centre of buoyancy is situated 4 ft. 3 in. below the top of the cylinder. The centre of gravity of the whole buoy and beacon is situated 3 ft. below the top of the cylinder, and the total displacement is 2.6 tons. Find the metacentric height. [Weight of sea water, 64 lb. per cu. ft.] (London Univ., 1912.)

Ans.—1.101 ft.

(6) A rectangular pontoon, 35 ft. long, 24 ft. broad, 8 ft. deep, weighs 70 tons. It carries on its upper deck a boiler 16 ft. diameter weighing 50 tons. The centres of gravity of the boiler and pontoon may be assumed to be at their centres of figure and in the same vertical line. Weight of sea water, 64 lb. per cu. ft. Find the metacentric height. (London Univ., 1913.)

Ans.—3.1 ft.

(7) A cylinder has a diameter of 12 in. and a relative density of 0.8. What is the maximum permissible length in order that it may float with its axis vertical? (London Univ., 1926.)

Ans.—10.6 in.

(8) A cylindrical buoy is 6 ft. in diameter and 8 ft. high and weighs 1.8 tons. Show that it will not float with its axis vertical in sea water. If one end of a vertical chain is fastened to the centre of the base, find the pull on the chain, in order that the buoy may just float with its axis vertical. (London Univ., 1925.)

Ans.— $MG = -1.87$ ft.; 4.15 tons

CHAPTER III

THE FLOW OF A FLUID

18. Flow of Water. When a liquid is flowing along a passage, such as a pipe, it will be subjected to a resistance due to viscosity, or friction. If the velocity of flow is very small, the liquid will flow in lines parallel to the sides of the passage; such a flow is called a streamline flow. If the velocity is large, cross-currents or eddies will be formed causing greater resistance to flow; such a flow is known as a turbulent or eddy flow. Also, the velocity of the liquid is not uniform over the cross-section, being slower towards the sides of the passage. In engineering problems, however, it is usual to assume the velocity to be uniform over the cross-section and equal to the mean velocity.*

Any obstruction in the passage or any change of section or direction will interfere with the steady flow. This will cause eddies or transverse motions of the particles and, consequently, there will be an additional loss of energy due to the friction caused by these transverse currents.

The stream line flow of water may be examined by inserting a coloured powder or liquid in the water at certain points of the channel and examining the path of the colour bands thus formed.

Consider a pipe of a cross-sectional area of a sq. ft. containing water which is flowing with a velocity of v ft. per sec. (Fig. 20); the pipe is running full. Consider any section of the pipe; a quantity of water in the shape of a cylinder of length v and area a will pass by this section in 1 sec.

Or, quantity of water flowing = volume of cylinder
= av cu. ft. per sec.

19. Flow Through Channels of Varying Section. If water is flowing through any channel or pipe, the quantity of water passing any transverse section in a given interval of time must be equal at all such sections, providing the depth of flow at any point remains constant.

* For viscous flow of a fluid see Chapter XII.

Let Fig. 21 represent a tapering pipe through which water is flowing. Let the pipe be running full.




FIG. 20

Let A_a = area at section aa

A_b = area at section bb .

Then,

quantity of water passing } = quantity passing bb per sec.
 section aa per sec.

Or, $A_a v_a = A_b v_b$

Therefore, $v_a = v_b \frac{A_b}{A_a}$

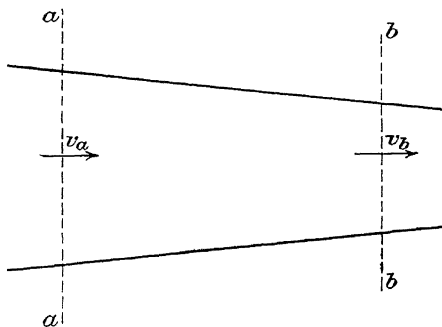


FIG. 21

20. Work Done in Overcoming Pressure. Let a large tank be full of water under a constant pressure of p lb. per sq. ft., and let water be forced into the tank through a small pipe of cross-sectional area of a sq. ft. (Fig. 22). Let v be the velocity in feet per second with which the water is forced through the pipe.

Then, work done per second in } = Force \times distance
 forcing water through pipe } moved per second
 $= pa \times v$

But, av = volume of water forced into tank per sec.

Therefore, work done = $p \times$ volume of flow per second

$$\begin{aligned}\text{Or,} \quad \text{work done} &= wH \times \text{volume} \\ &= WH\end{aligned}$$




FIG. 22

where W = weight of water injected per second and H = equivalent static head in feet of water

EXAMPLE.

300 gallons of water are pumped into a tank per minute under a pressure of 20 lb. per sq. in. Find the horse-power required. 1 gallon water weighs 10 lb.

$$\text{Weight of water per sec.} = \frac{300 \times 10}{60} = 50 \text{ lb.}$$

$$\text{Volume of water per sec.} = \frac{50}{62.4} = .802 \text{ cu. ft.}$$

$$\begin{aligned}\text{Work done per sec.} &= p \times \text{volume} \\ &= 20 \times 144 \times .802\end{aligned}$$

$$\begin{aligned}\text{Horse-power required} &= \frac{20 \times 144 \times .802}{550} \\ &= 4.2.\end{aligned}$$

ALTERNATIVE METHOD. Convert the pressure to pressure head in feet of water.

Then, horse-power = $\frac{WH}{550}$ where W = weight of water per sec.

$$\text{Static head} = H = \frac{p}{w} = \frac{20 \times 144}{62.4} = 46.2 \text{ ft. of water}$$

$$\text{Horse-power} = \frac{50 \times 46.2}{550} = 4.2$$

21. Velocity Head. Consider water flowing from a tank under a constant head H (Fig. 23). Let v be the velocity of the water in feet per second. Consider a small quantity of water of weight W on the surface at the top of the tank. This quantity will have a potential energy of WH . This same

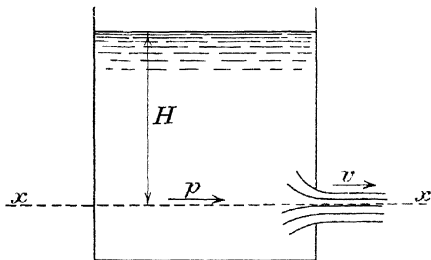


FIG. 23

quantity of water, when issuing through the orifice, may be looked upon as having fallen through the height H and converted its potential energy to kinetic energy. Then, ignoring frictional losses,

Loss of potential energy = gain of kinetic energy

$$\text{Or,} \quad WH = \frac{Wv^2}{2g}$$

$$\text{Therefore,} \quad H = \frac{v^2}{2g}$$

$$\text{Or,} \quad v = \sqrt{2gH}$$

By making use of these equations, the energy of moving water may be given as a static head in feet of water; this static head is known as the velocity head.

ALTERNATIVE PROOF.

Let p = intensity of pressure of water on line xx

Then, $p = wH$

Consider the water as being forced out of orifice by pressure p .

Let a = area of jet

W = weight of water issuing per second

Assuming the line xx to be the datum level, and ignoring the atmospheric pressure, which is constant throughout, the equations become

$$H + 0 + 0 = 0 + \frac{p_B}{w} + 0 = 0 + 0 + \frac{v^2}{2g}$$

$$\text{Or,} \quad H = \frac{p_B}{w} = \frac{v^2}{2g}$$

It should be noticed that no account has been taken of any frictional losses which may occur between the points chosen.

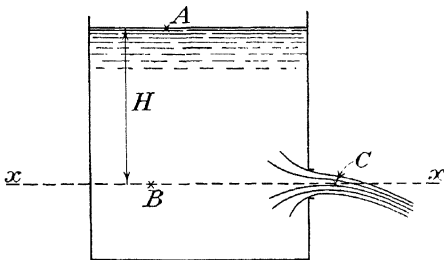


FIG. 24

Any such losses should be added or subtracted from one side of the equation.

As an example, supposing there is a loss of head between B and C equal to h ft. of water. Then,

$$Z_B + \frac{p_B}{w} + \frac{v_B^2}{2g} = Z_C + \frac{p_C}{w} + \frac{v_C^2}{2g} + h$$

⑦ **PROOF OF BERNOULLI'S THEOREM.** Consider water flowing through the non-uniform pipe of Fig. 25. The pipe is running full and under pressure. Consider the volume of water between the two sections AA and BB .

Let Z , p , v , and a be the height above datum, pressure, velocity, and area of pipe respectively at section AA . Let Z_1 , p_1 , v_1 , and a_1 be the corresponding values at BB . Let the whole quantity of water between AA and BB move to the position $A'A'$, $B'B'$, the movement being small.

Let distance between AA and $A'A' = dl$

BB and $B'B' = dl_1$

$$\text{Then,} \quad a \, dl = a_1 dl_1 \quad , \quad , \quad , \quad , \quad , \quad (1)$$

Then,

loss of potential energy + work done by pressure = gain of kinetic energy

$$\text{That is,} \quad W(Z - Z_1) + W \frac{(p - p_1)}{w} = \frac{W}{2g} (v_1^2 - v^2)$$

$$\text{Therefore,} \quad Z + \frac{p}{w} + \frac{v^2}{2g} = Z_1 + \frac{p_1}{w} + \frac{v_1^2}{2g}$$

EXAMPLE.

Water is flowing down a vertical tapering pipe 6 ft. long. The top of the pipe has a diameter of 4 in., the diameter of the bottom of the pipe is 2 in. If the quantity of water flowing is 300 gallons per minute, find the difference of pressure between the top and bottom ends of the pipe.

Let v_1 , p_1 , Z_1 , and a_1 refer to lower end of pipe.

v_2 , p_2 , Z_2 , and a_2 refer to top end of pipe.

$$\text{Quantity of water flowing per sec.} = \frac{300 \times 10}{60 \times 62.4} = .802 \text{ cu. ft.}$$

$$\text{Area of lower end of pipe} = \frac{\pi}{4} \times 2^2 = 3.14 \text{ sq. in.}$$

$$\text{Area of top end of pipe} = \frac{\pi}{4} \times 4^2 = 12.56 \text{ sq. in.}$$

$$v_1 = \frac{\text{quantity}}{\text{area in sq. ft.}} = \frac{.802 \times 144}{3.14} = 36.8 \text{ ft. per sec.}$$

$$v_2 = \frac{.802 \times 144}{12.56} = 9.2 \text{ ft. per sec.}$$

Applying Bernoulli's equation to both ends of pipe, and taking the datum level through the lower end,

$$Z_1 + \frac{p_1}{w} + \frac{v_1^2}{2g} = Z_2 + \frac{p_2}{w} + \frac{v_2^2}{2g}$$

$$0 + \frac{p_1}{w} + \frac{36.8^2}{64.4} = 6 + \frac{p_2}{w} + \frac{9.2^2}{64.4}$$

$$\begin{aligned} \frac{p_2 - p_1}{w} &= 21.1 - 1.31 - 6 \\ &= 13.79 \text{ ft. of water} \end{aligned}$$

$$\begin{aligned} \text{Or,} \quad p_2 - p_1 &= \frac{13.79 \times 62.4}{144} \\ &= 5.97 \text{ lb. per sq. in.} \end{aligned}$$

23. The Venturi Meter. A practical application of Bernoulli's theorem is found in the Venturi meter*, an instrument for measuring the quantity of water flowing through a pipe. The meter, in its simplest form, consists of a short length of pipe, tapering to a narrow throat in the middle (Fig. 26). Tubes enter the pipe at the enlarged end and at the throat, by means of which the pressure of the water at these sections may be measured. Piezometer tubes may be used, or the tubes may

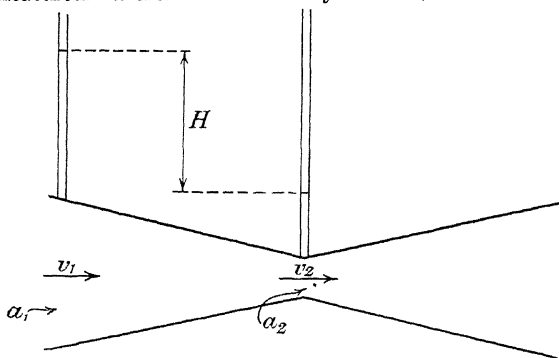


FIG. 26

be connected to a U-tube. As the water flows through the meter the velocity will increase at the throat owing to the reduction of area; consequently the pressure will be reduced. This reduction of pressure is measured by means of the piezometer tubes. Then, by applying Bernoulli's equation to the enlarged end and to the throat, the quantity of water flowing may be calculated.

Let H = difference of pressure head in feet of water in the piezometer tubes

a_1 = area of enlarged end in square feet

a_2 = area of throat in square feet

q = quantity of water flowing in cubic feet per second

v_1 = velocity of water at enlarged end

v_2 = velocity of water at throat

Then, $q = a_1 v_1 = a_2 v_2$

Therefore, $v_1 = v_2 \frac{a_2}{a_1}$ (1)

* For a description of an actual Venturi meter see Art. 130.

Applying Bernoulli's equation, and assuming the meter to be horizontal,

$$\frac{p_1}{w} + \frac{v_1^2}{2g} = \frac{p_2}{w} + \frac{v_2^2}{2g}$$

$$\text{Or,} \quad \frac{p_1}{w} - \frac{p_2}{w} = \frac{v_2^2}{2g} - \frac{v_1^2}{2g}$$

$$\text{But,} \quad \frac{p_1}{w} - \frac{p_2}{w} = H$$

$$\text{Therefore,} \quad H = \frac{v_2^2 - v_1^2}{2g}$$

Substituting for v_1 from Eq. 1,

$$H = \frac{v_2^2}{2g} \left(1 - \frac{a_2^2}{a_1^2} \right)$$

$$\begin{aligned} \text{Therefore,} \quad v_2 &= \frac{a_1}{\sqrt{a_1^2 - a_2^2}} \sqrt{2gH} \\ q &= a_2 v_2 \\ &= \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \sqrt{2g} \sqrt{H} \end{aligned}$$

But, $\frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \sqrt{2g}$ is a constant for any one meter; let this constant equal c .

$$\text{Then,} \quad q = c\sqrt{H} . \quad . \quad . \quad . \quad . \quad (2)$$

In this case H is the theoretical head, as no frictional losses have been taken into account. In practice it is found that there is a loss of head in the meter between the enlarged end and the throat; consequently the water will not rise so high in the pressure tube at the throat. This means that a larger difference of head will be measured. In order to allow for this, a coefficient k is introduced into the equation, the magnitude of k being found experimentally.

$$\text{Let} \quad h = \begin{array}{c} \text{difference of head, in feet of water, actually} \\ \text{measured} \end{array}$$

$$\text{Then,} \quad q = k c \sqrt{h} . \quad . \quad . \quad . \quad . \quad (3)$$

But, $q = c\sqrt{H}$

Therefore, $k c \sqrt{h} = c \sqrt{H}$

From which, $k = \sqrt{\frac{H}{h}}$ (4)

The actual head measured, h , is known as the Venturi head.

In the converging cone of the meter, h will be larger than H ; then k will be less than unity. An average value of k is .97.

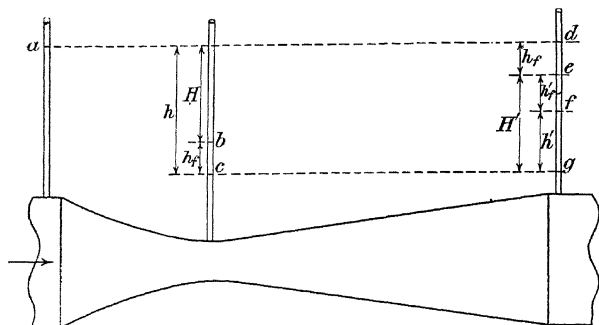


FIG. 27

The loss of head in the meter will be partly due to friction and partly due to shock caused by a change of section; consequently, k will not be truly a constant for all velocities; but the variation is slight.

The Venturi meter is not accurate for very low velocities on account of the variation of k .

It will be noticed that there is a limit to the ratio of the diameters of the throat and enlarged end. The larger this ratio is, the smaller will be the pressure in the throat; if the pressure in the throat falls below 8 ft. of water absolute, dissolved gases and vapour will be given off from the water; this will interfere with the flow (Art. 2). Hence, the limiting ratio of the diameters is reached when the throat pressure is approximately 8 ft. of water absolute.

The coefficient k will have a different value for the converging and diverging cones of the meter. In the converging cone the theoretical head is less than the actual head; whilst in the diverging cone the theoretical head is greater than the actual

head. Consider the Venturi meter shown in Fig. 27; let pressure tubes be fitted at both enlarged ends and throat. Assume the water is flowing from left to right.

Let h_f = head lost in converging cone

h'_f = head lost in diverging cone

H' = theoretical difference of head in diverging cone

h' = actual difference of head in diverging cone.

Let the water level at the left enlarged end be at a . Then, if there were no losses in the meter, the water level at the right enlarged end would be at the same level d . The friction loss in the converging cone reduces this water level to e ; whilst the frictional loss in the diverging cone further reduces the level to f .

Referring to the converging cone only, from Equation (4),

$$H = k^2 h$$

But, $h_f = h - H$

Therefore, $h_f = h(1 - k^2)$ (5)

Referring to the diverging cone, let k' be the coefficient of the diverging cone. Then, if there were no frictional loss in this cone, the water level at the enlarged end would rise to e ; the theoretical difference of head between this section and the throat would then be the height eg . But owing to the frictional loss the water level only reaches f . Then the difference of head actually measured is fg .

Then, quantity flowing = $c\sqrt{H'} = k'c\sqrt{h'}$

Therefore, $H' = k'^2 h'$ (6)

But, $h'_f = H' - h'$

Therefore, $h'_f = h'(k'^2 - 1)$ (7)

Also, from Fig. 27,

$$fg = dg - df$$

Or, $h' = h - h_f - h'_f$ (8)

It will be noticed that k' is greater than unity.

EXAMPLE 1.

State and prove Bernoulli's theorem. The difference of head registered in the two limbs of a mercury gauge, with water above the mercury, connected to a Venturi meter was 7 in. The diameter of the pipe and the throat of the meter are 6 in. and 3 in. respectively. The coefficient of the meter is .97. Find the discharge through the meter. (London Univ., 1914.)

$$\begin{aligned}\text{Difference of head in feet of water} &= \frac{7(13.6 - 1)}{12} && (\text{Art. 7}) \\ &= 7.35 \text{ ft.}\end{aligned}$$

$$a_1 = \frac{\pi}{4} (.5)^2$$

$$a_2 = \frac{\pi}{4} (.25)^2$$

$$\begin{aligned}c &= \frac{a_1 a_2 \sqrt{2g}}{\sqrt{a_1^2 - a_2^2}} = \frac{\pi \times .25 \times .0625 \sqrt{64.4}}{\sqrt{.0625 - .0039}} \\ &= .407\end{aligned}$$

$$\begin{aligned}\text{Quantity} &= k c \sqrt{h} && (\text{Eq. 3}) \\ &= .97 \times .407 \sqrt{7.35} \\ &= 1.07 \text{ cu. ft. per sec.}\end{aligned}$$

EXAMPLE 2.

Show that in a Venturi meter the quantity of water passing through the meter will only be proportional to the root of the "Venturi head" if the head lost in friction is proportional to the head lost due to increased velocity.

A Venturi meter placed in a 3 in. diameter pipe has a throat diameter of 1 in. The constant of the meter is .97. Determine the number of cubic feet passing per minute when the Venturi head is 16.2 in. of water.

If the frictional loss in the diverging cone is double that in the converging cone, find the total head lost in the meter due to friction when the water is passing at the above rate. (London Univ., 1921.)

This question assumes that the whole of the head lost in the meter is due to friction.

The coefficient k can only be a constant if $h_f \propto H$; because

$$k = \sqrt{\frac{H}{h}} \quad (\text{From Eq. 4})$$

$$\text{Also,} \quad h = H + h_f$$

$$\text{Let} \quad h_f = mH \text{ where } m \text{ is a constant}$$

$$\text{Then,} \quad k = \sqrt{\frac{H}{H + mH}} = \sqrt{\frac{1}{1 + m}} = \text{a constant}$$

$$\begin{aligned}\text{Quantity per sec.} &= k \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \sqrt{2g} \sqrt{H} \\ &= .97 \left[\frac{\frac{\pi}{4} \left(\frac{1}{144} \times \frac{1}{16} \right)}{\sqrt{\frac{1}{256} - \frac{1}{20,700}}} \right] 8.02 \sqrt{\frac{16.2}{12}} \\ &= .97 \times .0055 \times 8.02 \times 1.16 = .0496 \text{ cu. ft.}\end{aligned}$$

Quantity per min. = $.0496 \times 60 = 2.98$ cu. ft.

From Eq. (5), $h_f = h(1 - k^2)$

$$= \frac{16.2}{12}(1 - .97^2) = .078 \text{ ft.}$$

Head lost in diverging cone = $2 \times .078 = .156$ ft.

$$\begin{aligned} \text{Total head lost} &= .078 + .156 \\ &= .234 \text{ ft.} \end{aligned}$$

24. **Horse-power of Jet of Water.** The horse-power of a jet of water may be obtained by dividing the kinetic energy of the jet per second by 550.

Let a = area of cross-section of jet in square feet
 v = velocity of jet in feet per second
 W = weight of water flowing per second
 $= w a v$

Then, kinetic energy of jet = $\frac{Wv^2}{2g}$ ft. lb. per sec.

$$\begin{aligned} \text{Horse-power} &= \frac{Wv^2}{2g \ 550} \\ &= \frac{w a v^3}{2g \ 550} \end{aligned}$$

EXAMPLE.

A jet of water has a velocity of 20 ft. per sec. If the diameter of the jet is 2 in., find the horse-power.

$$\begin{aligned} \text{Area of jet} &= \frac{\pi \ 2^2}{4 \ 144} \\ &= .0218 \text{ sq. ft.} \end{aligned}$$

$$\begin{aligned} \text{Horse-power} &= \frac{w a v^3}{2g \ 550} \\ &= \frac{62.4 \times .0218 \times 20^3}{64.4 \times 550} \\ &= .308 \end{aligned}$$

25. **The Radial Flow of Water.** Consider water flowing radially between two horizontal circular flat plates placed

parallel with a small distance between them (Fig. 28). The space between the plates is full of water. Let the water flow up a central pipe and then flow radially outwards between the plates. The outside of the plates are open to the atmosphere, so that the water will be discharged at atmospheric pressure.

Let v_o = velocity of water in pipe
 p_o = absolute pressure of water in pipe
 a_o = area of cross-section of pipe
 p_a = pressure of atmosphere
 v_a = velocity of water when leaving plates

As the water flows between the plates radially outwards, the area of flow will increase; therefore, the velocity will decrease. This will cause an increase in pressure.

Consider the total energy of the water at A , just inside the pipe, and at B which is at the outer edge of the plates.

Let R = radius of plates at B
 and t = distance between the plates

Then,

Energy at A = Energy at B

$$\frac{p_o}{w} + \frac{v_o^2}{2g} = \frac{p_a}{w} + \frac{v_a^2}{2g} = H$$

where H is a constant.

As p_o , v_o , and p_a are known, this equation will give v_a .

Consider any point X at a radius of x from the centre of the plates. Let v_x be velocity of water at this point and p_x the pressure. Then, as quantity of water flowing is a constant at all sections,

$$v_a \times 2\pi R t = v_x \times 2\pi x t$$

$$\text{Or,} \quad v_x = v_a \frac{R}{x} \quad . \quad . \quad . \quad . \quad . \quad . \quad (1)$$

Also, total energy at X = H

$$= \frac{p_x}{w} + \frac{v_x^2}{2g}$$

Substituting from Eq. (1),

$$\frac{p_x}{w} = H - \frac{v_a^2 R^2}{2g x^2} \quad . \quad . \quad . \quad . \quad . \quad . \quad (2)$$

Thus, the pressure at any point varies inversely with the square of the radius at that point and will increase towards the outer edge, the increase following a parabolic law. If the

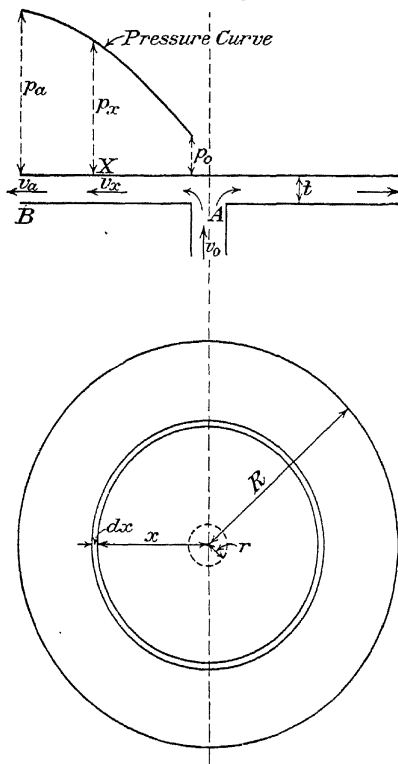


FIG. 28

pressure at any radius is plotted as shown in Fig. 28, the parabolic curve thus obtained is known as Barlow's curve.

Having found the intensity of pressure at any radius, the total static pressure on the plate may be obtained by finding an equation for the pressure on a thin ring and integrating between the required limits.

Let r = radius of pipe.

Consider the pressure at X on a thin ring of thickness dx .
From Equation (2),

$$p_x = w \left(H - \frac{k}{x^2} \right)$$

where the constant $k = \frac{v_a^2 R^2}{2g}$

Area of ring $= 2\pi x dx$

Total pressure on ring $= p_x 2\pi x dx$

$$= 2\pi w \left(H - \frac{k}{x^2} \right) x dx$$

$$\begin{aligned} \left. \begin{array}{l} \text{Total static pressure due to} \\ \text{water on upper plate} \end{array} \right\} &= 2\pi w \int_r^R \left[H x dx - \frac{k}{x} dx \right] + p_o \pi r^2 \\ &= 2\pi w \left[\frac{Hx^2}{2} - k \log_e x \right]_r^R + p_o \pi r^2 \\ &= 2\pi w \left\{ \frac{H}{2} (R^2 - r^2) - k \log_e \frac{R}{r} \right\} + p_o \pi r^2 \end{aligned} \quad (3)$$

This is the total upward absolute static pressure. If the atmosphere is pressing on the outside of the plate, the net static pressure will be the total atmospheric pressure on the plate minus the above water pressure.

Total atmospheric pressure on plate $= p_a \pi R^2$

It will be noticed that the dynamic force due to the entering water has not been included.

The principle is made use of in the nozzles of fire hydrants in order to produce an even distribution of flow.

The same reasoning will hold when the water is flowing radially inwards, passing away down the centre pipe.

EXAMPLE.

Water flows radially outwards between two horizontal discs which are $\frac{1}{2}$ in. apart and 12 in. diameter. The water enters at the centre of the lower disc through a 2 in. diameter pipe, with a velocity of 20 ft. per sec. Find the pressure of the water in this pipe if the pressure at the outer edge of the discs is atmospheric. Find also the resultant static pressure on the upper disc. Neglect the dynamic force of the entering water.

Using the notation of Fig. 28,

$$\begin{aligned} v_a &= \frac{v_o r^2 \pi}{2\pi R t} \\ &= \frac{20 \times 1}{2 \times 6 \times .5} = 3.33 \text{ ft. per sec.} \end{aligned}$$

Applying Bernoulli's equation,

$$\begin{aligned} \frac{p_o}{w} + \frac{v_o^2}{2g} &= \frac{p_a}{w} + \frac{v_a^2}{2g} \\ \frac{p_o}{w} &= 34 + \frac{3.33^2}{64.4} - \frac{20^2}{64.4} \\ &= 28 \text{ ft. of water (absolute)} \end{aligned}$$

$$\text{Let } H = \frac{p_a}{w} + \frac{v_a^2}{2g} = 34 + .173 = 34.173$$

$$\text{Also } k = \frac{v_a^2 R^2}{2g} = .173 \times .5^2 = .0432$$

Using Eq. (3),

Total upward pressure on plate

$$\begin{aligned} &= 2\pi w \left\{ \frac{34.173}{2} \left(.5^2 - \frac{1}{12^2} \right) - .0432 \log_e 6 \right\} + p_o \pi r^2 \\ &= 2\pi 62.4 \{ (17.086 \times .243) - (.0432 \times 2.303 \times .778) \} + 12.1\pi \\ &= 1598 + 38 \\ &= 1636 \text{ lb.} \end{aligned}$$

$$\begin{aligned} \left. \begin{array}{l} \text{Downward pressure of} \\ \text{atmosphere} \end{array} \right\} &= p_a \pi R^2 \\ &= 14.7 \times \pi \times 6^2 = 1660 \text{ lb.} \end{aligned}$$

$$\begin{aligned} \text{Net pressure on plate} &= 1660 - 1636 \\ &= 24 \text{ lb.} \end{aligned}$$

✓ **26. Centrifugal Head Impressed on Revolving Liquid.** A rotating fluid is called a vortex. If the fluid is rotating freely without any external forces being impressed upon it, it is called a free vortex. An example of a free vortex is the whirlpool formed in the emptying of a wash basin having a

central drain. If the fluid is rotated by an external force the vortex is termed a forced vortex. A forced vortex will have a centrifugal head impressed on the liquid, caused by its rotation.

Referring to Fig. 29, imagine an arm containing water to be rotating in a horizontal plane about the centre O and with an angular velocity of ω . Let the arm be full of water between a radius of R_1 and R_2 and let the cross-sectional area of the arm be a .

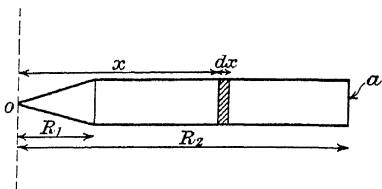


FIG. 29

Consider a small section of the water of thickness dx and at a radius of x .

Then, volume of small section of water = $a dx$

weight „ „ „ = $w a dx$

Centrifugal force acting on water considered = $\frac{(w a dx)}{g} \omega^2 x$

$$\begin{aligned} \left. \begin{array}{l} \text{Total centrifugal force impressed on whole} \\ \text{of rotating water} \end{array} \right\} &= \int_{R_1}^{R_2} \frac{w a dx}{g} \omega^2 x \\ &= \frac{w a \omega^2}{2g} \left[x^2 \right]_{R_1}^{R_2} \\ &= \frac{w a \omega^2}{2g} (R_2^2 - R_1^2) \end{aligned}$$

Let v_1 : tangential velocity at radius of R_1
and „ „ „ „ R_2

Then, total centrifugal force impressed = $\frac{w a}{2g} (v_2^2 - v_1^2)$,

since $v_1 = \omega R_1$ and $v_2 = \omega R_2$

Intensity of pressure at end of arm due to centrifugal force $\left\{ = \frac{w}{2g} (v_2^2 - v_1^2) \right.$

Centrifugal head impressed $= \frac{p}{w} = \frac{v_2^2}{2g} - \frac{v_1^2}{2g}$

Thus, the centrifugal head impressed on a revolving fluid is the difference between the tangential velocity heads.

This is the principle of the centrifugal pump, which obtains its lifting power from this head.

Alternative Proof. A more general proof for the centrifugal head impressed on revolving liquid may be obtained by con-

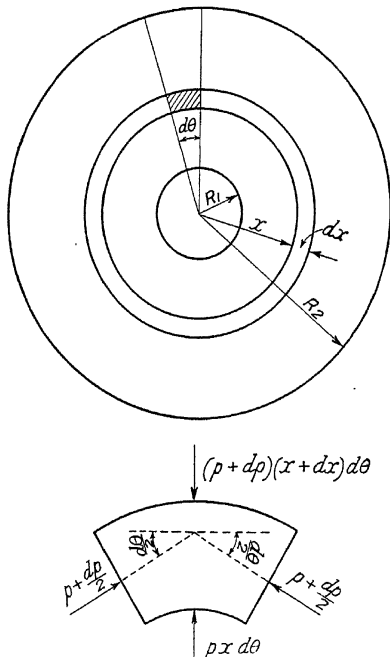


FIG. 29A

sidering the annular ring of liquid revolving with an angular velocity ω (Fig. 29A). Let R_1 and R_2 be the internal and external radii, and consider a thin ring of the liquid of radius x and thickness dx . Consider a portion of this thin ring subtending a small angle $d\theta$ at the centre and let p be the intensity of pressure on the inside of the element, due to the centrifugal force. Then the centrifugal pressure will increase by dp over the thickness of the ring dx . Consider the whole

annular ring to be of unit thickness in the plane of the paper ; then,

area of inside of element	$= x d\theta$
area of outside element	$= (x + dx)d\theta$
area of sides of element	$= dx$
intensity of pressure on outside of element	$= p + dp$
intensity of pressure on sides of element	$= p + \frac{dp}{2}$
Weight of element	$= w(x d\theta)dx$
Centrifugal force on element	$= \frac{(wx d\theta dx) \omega^2 x}{g}$

Consider the enlarged view of element (Fig. 29A) ; the normal forces due to the pressure of the liquid are shown in the figure. These, together with the centrifugal force, keep the element in equilibrium. Hence, by resolving radially, the required equation may be obtained.

Resolving radially, and assuming the sine of a small angle to be equal to the angle in radians,

$$p x d\theta + 2 \left(p + \frac{dp}{2} \right) dx \frac{d\theta}{2} - (p + dp)(x + dx) d\theta = \frac{wx d\theta \omega^2 x dx}{g}$$

Dividing throughout by $d\theta$, and ignoring all small quantities of the second order,

$$dp = \frac{w \omega^2 x dx}{g}$$

Integrating between R_1 and R_2 ,

$$\begin{aligned} \text{Centrifugal intensity of pressure} &= \int dp = \int_{R_1}^{R_2} \frac{w \omega^2 x dx}{g} \\ &= \frac{w \omega^2}{2g} (R_2^2 - R_1^2) \end{aligned}$$

Then, centrifugal head $= \frac{p}{w} = \frac{\omega^2}{2g} (R_2^2 - R_1^2)$

Or, as $v_1 = \omega R_1$ and $v_2 = \omega R_2$,

$$\text{centrifugal head} = \frac{v_2^2}{2g} - \frac{v_1^2}{2g}$$

EXAMPLE.

Water enters a revolving turbine wheel at the centre and flows through the wheel in a radial direction. The wheel is running full. If the inlet radius of the wheel is 2 ft. and the outlet radius 3.5 ft., find the centrifugal head impressed on the water when the wheel is running at 300 revs. per min.

$$\begin{aligned}\text{Velocity of wheel at inlet} &= v_1 = 2\pi \times \frac{300}{60} \\ &= 62.8 \text{ ft. per sec.}\end{aligned}$$

$$\begin{aligned}\text{Velocity of wheel at outlet} &= v_2 = 62.8 \times \frac{3.5}{2} \\ &= 110 \text{ ft. per sec.}\end{aligned}$$

$$\begin{aligned}\text{Centrifugal head} &= \frac{v_2^2}{2g} - \frac{v_1^2}{2g} \\ &= \frac{110^2 - 62.8^2}{64.4} \\ &= 126.7 \text{ ft. of water}\end{aligned}$$

27. Revolving Cylinder of Liquid. Consider a cylinder containing a liquid to be revolved about a vertical axis OC (Fig. 30). The surface of the liquid will take the shape of a paraboloid as shown. This is another example of a forced vortex.

Consider a small particle of the liquid at the point A on the surface. Let W be the weight of the particle. It will be in equilibrium under the action of three forces: the weight, the centrifugal force, and the pressure.

Let ω = angular velocity of cylinder

x = radius of particle

$$\text{Centrifugal force on particle} = \frac{W}{g} \omega^2 x$$

The centrifugal force will act horizontally outwards, and the weight vertically downwards. The resultant of these two will be opposed by the pressure of the fluid. As the latter must act normal to the surface, it follows that a tangent to the surface at A will be at right angles to the resultant of the centrifugal force and the weight.

It follows from Fig. 30 that

$$\frac{EF}{x} = \frac{W}{\frac{W\omega^2 x}{g}} \text{ (Similar triangles)}$$

Therefore, $EF = \frac{g}{\omega^2}$

and is, therefore, a constant.

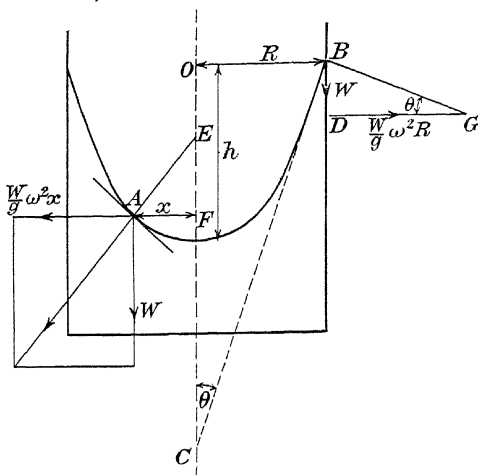


FIG. 30

As EF is the subnormal of the liquid surface, the shape of the surface is a paraboloid.

Consider the liquid at B .

Let R = radius at B

θ = angle of inclination of surface at B to vertical

h = height of paraboloid

Consider the similar triangles BDG and BOC ,

$$\frac{BD}{DG} = \frac{BO}{OC}$$

Or, $\frac{W}{\frac{W}{g} \omega^2 R} = \frac{R}{2h}$

as OC will be twice the height of the paraboloid.

Consider a vertical thin hollow cylinder of water of radius x and thickness dx .

From Equation (1),

$$\text{centrifugal head on thin cylinder} = \frac{\omega^2 x^2}{2g}$$

$$\begin{aligned} \text{hence, intensity of pressure at radius } x &= p_x = w h \\ &= \frac{w \omega^2 x^2}{2g} \end{aligned}$$

Although this centrifugal pressure is horizontal it will also act vertically on top and bottom of the cylinder, as the pressure of water is transmitted in all directions.

Let R = radius of cylinder in question.

Then, total vertical pressure on top or bottom of cylinder due to centrifugal pressure

$$\begin{aligned} &= \int_0^R p_x \times 2\pi x \, dx \\ &= \int_0^R \frac{w \omega^2 x^2}{2g} \times 2\pi x \, dx \\ &= \int_0^R \frac{2\pi \omega^2 x^3 \, dx \, w}{2g} \\ &= \frac{\pi \omega^2 R^4 w}{4g} \\ &= \frac{\pi (2\pi 4)^2 \left(\frac{1}{2}\right)^4}{4 \times 32 \cdot 2} \times 62 \cdot 4 = 60 \cdot 9 \text{ lb.} \end{aligned}$$

Hence, total pressure on top of cylinder = 60.9 lb.

Total pressure on bottom of cylinder

$$\begin{aligned} &= \text{centrifugal pressure} + \text{weight of water} \\ &= 60 \cdot 9 + (\pi R^2 \times \text{depth} \times w) \\ &= 60 \cdot 9 + \left(62 \cdot 4 \times \pi \left(\frac{1}{2}\right)^2 \times \frac{1}{12} \right) \\ &= 60 \cdot 9 + \cdot 408 \\ &= 61 \cdot 308 \text{ lb.} \end{aligned}$$

28. Flow of Gases under Constant Head. The velocity with which a gas will flow from one chamber to another may be

obtained in the same manner as for a liquid, providing the density in each chamber remains constant.

Let a gas flow from a chamber *A* through an orifice or pipe into a chamber *B*. Let the pressure in *A* remain constant and equal p_1 lb. per sq. in. Let the pressure in *B* also remain constant and equal p_2 lb. per sq. in. Then p_1 must be greater than p_2 . Assume there is no change of temperature. Let w_1 be the density of the gas in *A* in pounds per cubic feet.

The head causing flow will be due to the difference of pressure in *A* and *B*. This head may be expressed as an equivalent static head in feet of gas under the same condition as the gas in *A*.

$$\text{Equivalent static head} = H_1 = \frac{(p_1 - p_2)144}{w_1}$$

It should be noticed that such a head of gas could not actually exist under a constant density.

$$\text{Velocity of gas} = \sqrt{2gH_1}$$

If the gas being dealt with is atmospheric air, the barometer reading and temperature must be known in order to convert the standard density to the density under the required conditions. The density of air at 0° C. and 14.7 lb. per sq. in. may be taken as .081 lb. per cu. ft. This should be converted to the required density by the law of gases

$$\frac{pv}{T} = \text{a constant,}$$

where *T* is the absolute temperature.

29. The Pitot Tube. The Pitot tube is an instrument by which the velocity head of a flowing liquid may be measured. In its simplest form, it consists of a glass tube with the lower end bent through 90° (Fig. 31). It is placed in the moving liquid with the lower opening facing the direction of motion. The liquid flows up the tube until all its kinetic energy is converted to potential energy; the velocity of the liquid may then be estimated by the height of the liquid in the tube.

This instrument is often used for measuring the velocity of rivers.

Let h = height of liquid in tube above surface

H = depth of tube in liquid

v = velocity of liquid

Applying Bernoulli's equation to the points *A* and *B*, which are just outside and inside the mouth of the tube respectively,

total energy at *A* = total energy at *B*

$$H + h = H + \frac{v^2}{2g}$$

Therefore,
$$h = \frac{v^2}{2g}$$

In practice, this is usually multiplied by a coefficient *k* ; then

$$h = \frac{kv^2}{2g}$$

In well-formed instruments, *k* is equal to unity.

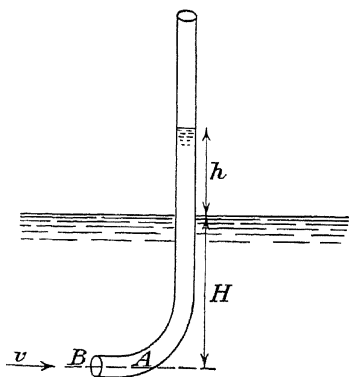


FIG. 31

Attempts have been made to deduce the value of *h* by considering the total force at *B* as equal to the rate of change of momentum ; but this method gives results twice too high. This method obviously cannot be used as there is a cone of still liquid in front of *B* which deviates the moving liquid from its sloping sides. This reduces the pressure on the tube, just

as the windward side of a structure or building does not get the full force of the wind.

One type of Pitot tube consists of two tubes, one bent at the base, as in Fig. 31, and facing towards the motion of the water, and one straight tube open at the top end with a hole in the lower end parallel to the direction of motion. The velocity head will be the difference of water level in the two tubes. The object of this is to eliminate any losses due to the tube.

A view of an actual Pitot tube is shown in Fig. 31A; this is known as the Amsler Hydrometrical Tube.* It consists of two vertical tubes each having the lower end bent at right angles, one to point up-stream against the current, the other to point down-stream with the current; both lower ends are tapered to a fine nozzle. In order to read the height of the water columns in the tubes a small hand pump is fitted at the top of the instrument, by means of which the water columns can be sucked up to any convenient height. The upper parts of the tubes are of glass and are fitted with a sliding graduated scale.

The difference of water level in the two tubes will be the velocity head of the current. Let h_1 be the reading of the up-stream tube and h_2 be the reading of the down-stream tube.

Then,
$$v = c\sqrt{h_1 - h_2}$$

where c is the constant of the instrument.

EXAMPLE 1.

The following observations were made for the purpose of calibrating a Pitot tube—

$V =$ velocity of fluid	1.86	2.96	4.20	6.47	7.97	ft. per sec.
$H =$ head	.756	1.72	3.50	9.12	14.40	in. of water

Plot V against \sqrt{H} and determine the mean value of the constant for the tube. (London Univ., 1921.)

The values of V and \sqrt{H} are shown plotted in Fig. 32, and a straight line is drawn a mean through the points. This line will pass through the origin as $V = 0$ when $H = 0$.

Let $c =$ constant for the meter

Then,
$$V = c\sqrt{H}$$

Therefore,
$$c = \frac{V}{\sqrt{H}}$$




FIG. 31A.—AMSLER
HYDROMETRICAL
TUBE

* By courtesy of Messrs. Amsler Brothers, Schaffhausen, Switzerland.

Using the values of V and \sqrt{H} at the point B (Fig. 32),

$$c = \frac{8}{3.7} = 2.162$$

Then, $V = 2.162 \sqrt{H}$

where H is the measured head in inches.

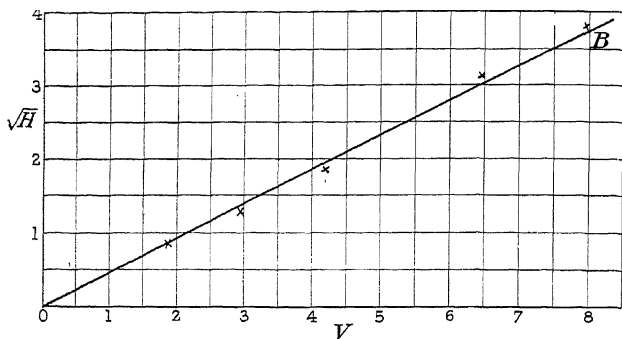


FIG. 32

EXAMPLE 2.

The velocity of water in a pipe was measured with a Pitot tube consisting of one tube with orifice facing the direction of flow and the other orifice perpendicular to the first orifice. The difference of head at the centre of pipe was 3.5 in. of water. If the mean velocity of the water is two-thirds the velocity at the centre, find the quantity of water flowing per minute. The diameter of the pipe is 10 in. Take the coefficient of the Pitot tube as unity.

$$\text{Area of pipe} = \frac{\pi 10^2}{4 \cdot 144} = .545 \text{ sq. ft.}$$

$$\begin{aligned} \text{Velocity at centre of pipe} &= k \sqrt{2gh} \\ &= \sqrt{2g \frac{3.5}{12}} \\ &= 4.33 \text{ ft. per sec.} \end{aligned}$$

$$\begin{aligned} \text{Mean velocity in pipe} &= \frac{2}{3} \times 4.33 \\ &= 2.885 \text{ ft. per sec.} \end{aligned}$$

$$\begin{aligned} \text{Quantity flowing per min.} &= 2.885 \times 60 \times .545 \\ &= 94.3 \text{ cu. ft.} \end{aligned}$$

EXAMPLES 3.

(1) Find the work done in forcing 50 gallons of water into a boiler in which the pressure is 180 lb. per sq. in. gauge. If this work is done in 5 min., what is the horse-power expended?

Ans.—208,000 ft. lb. 1.26 h.p.

(2) Water is flowing along a pipe with a velocity of 24 ft. per sec. Express this as velocity head in feet of water. What is the corresponding pressure in pounds per square inch?

Ans.—8.95 ft. 3.88 lb.

(3) Water at an altitude of 120 ft. above sea-level has a velocity of 16 ft. per sec. and a pressure of 60 lb. per sq. in. Give the total energy of 1 lb. of this water reckoned above sea-level.

Ans.—262.58 ft. lb.

(4) A pipe 1,000 ft. long has a slope of 1 in 100 and tapers from 4 ft. diameter at the high end to 2 ft. diameter at the low. The quantity of water flowing is 1,200 gallons per minute. If the pressure at the high end is 10 lb. per sq. in., find the pressure at the low end. Neglect friction.

Ans.—14.25 lb. per sq. in.

(5) Water flows from a supply tank into a chamber in which the pressure is 10 lb. per sq. in. vacuum. If the level of the water in the supply tank is 20 ft. above the vacuum chamber, find the velocity of the entering water.

Ans.—52.6 ft. per sec.

(6) A Venturi meter has an enlarged end of 2 sq. ft. area and a throat area of .25 sq. ft. The coefficient of the meter is .97. If the Venturi head is 9 in. of water, find the quantity of water flowing.

Ans.—1.695 cu. ft. per sec.

(7) A jet of water 1 in. diameter has a velocity of 60 ft. per sec. Find the horse-power of the jet.

Ans.—2.07.

(8) Two horizontal circular discs of 8 in. diameter are 1 in. apart. Water flows between the discs radially towards the centre and leaves by a vertical pipe of 1 in. diameter situated at the centre of the lower disc. If the pressure of the entering water is 14.7 lb. per sq. in., find the pressure inside the vertical pipe when the water is flowing at the rate of 40 gallons per minute. Find, also, the intensity of pressure of the water between the discs at a radius of 2 in.

Ans.—12.12 lb. per sq. in. 14.6924 lb. per sq. in.

(9) A cylindrical arm full of water is rotated in a horizontal plane at 100 rev. per min. about one end. The arm is 2 ft. long and its diameter is 2 in. Find the centrifugal head impressed on the water and the total pressure on the outer end of the arm.

Ans.—6.81 ft. of water. 9.28 lb.

(10) The air supply to a gas engine is measured by drawing the air into a large chamber through a small orifice. If the difference of pressure between the outside air and the air in the chamber is 16 in. of water, find the velocity with which the air flows through the orifice. Temperature of atmosphere is 18° C., reading of barometer is 29 in. of mercury. Weight of 1 cu. ft. of air at 0° C. and a pressure of 30 in. of mercury is .081 lb.

Ans.—270 ft. rep sec.

(11) A Pitot tube was placed in the centre of a pipe 8 in. diameter with one orifice facing the stream and the other perpendicular to it. The difference of pressure on the two orifices as measured by an air gauge was $1\frac{1}{2}$ in. of water. The coefficient of the tube was unity. Taking the mean velocity of the water in the pipe to be .83 of the maximum velocity, find the discharge through the pipe. (London Univ., 1914.)

Ans.—822 cu ft. per sec.

(12) State Bernoulli's theorem for stream line flow of a liquid and give an elementary proof of the theorem.

A portion of a pipe for conveying water is vertical and the diameter of the upper part of the pipe is 2 in., and the section is gradually reduced to 1 in. diameter at the lower part. A pressure gauge is inserted where the diameter is 2 in., and a second gauge is placed 6 ft. below the first and where the pipe is 1 in. diameter. When the quantity of water flowing up through the pipe is 6.85 cu. ft. per min., the gauges show a pressure difference of 4.5 lb. per sq. in. Assuming that the frictional losses vary as the square of the velocity, determine the quantity of water passing through the pipe when the two gauges show no pressure difference and the water is flowing downwards. (London Univ., 1921.)

Ans.—4.05 cu. ft. per min.

(13) Find, from Bernoulli's theorem, an expression for the theoretical discharge of a horizontal Venturi meter. State how the actual discharge compares with the theoretical. A Venturi meter tapers from 12 in. diameter at the entrance to 4 in. diameter at the throat, and the discharge coefficient is .98. The difference of pressure between entrance and throat is 2.2 in. of mercury. Calculate the discharge in gallons per minute. (London Univ., 1917.)

Ans.—409 gallons per minute.

(14) A vertical pipe of radius r_1 in. is fitted at the outlet end with a flange of radius r_2 in. A disc of the same diameter r_2 is placed above the flange, and separated from it by a narrow gap. Water from the pipe flows radially between them and is discharged into the atmosphere. Neglecting friction, find general expressions for the pressure between the surfaces at any radius, and for the resultant inward force on the disc. Sketch the curve of pressure distribution. (London Univ., 1919.)

(15) A Venturi has an entrance diameter of 6 in. and a throat diameter of 2 in. Pipes from the entrance and throat lead water to the limbs of a U-tube containing mercury, and the difference of pressure at these two places in the meter is thus recorded by a difference of mercury level. If the coefficient of the meter is .96 draw a curve showing a relation between gallons of water passing through the meter per minute and the difference of mercury level over a range 0 to 15 in. (London Univ., 1919.)

(16) Give a proof of Bernoulli's theorem and show how this is used to determine the discharge from a Venturi meter. (A.M.I. Mech. E., 1922.)

(17). A conical tube is fixed vertically with its smaller end upwards, and forms part of a pipe line. The velocity at the smaller end is 15 ft. per sec., and at the larger end 5 ft. per sec., the tube is 5 ft. long; the pressure at the upper end is equivalent to a head of 10 ft.; the loss in the tube expressed in feet head is given by

$$\frac{.3(v_1 - v_2)^2}{2g}$$

where $v_1 = 15$ and $v_2 = 5$.

Determine the pressure at the lower end of the tube. (A.M.I. Mech. E., 1922.)

Ans.—17.64 ft. of water.

(18) Explain the theory of the Pitot tube and obtain an expression for the velocity in terms of the observed difference of level of the liquid, of specific gravity S , in the U-tube connected to the up- and down-stream orifices immersed in flowing water.

If the difference of level is 1.2 ft., the specific gravity of the liquid 1.25, and the calibration coefficient for the orifices .865, what is the velocity in feet per second? (A.M.I. Civil E., 1922.)

Ans.—3.33.

(19) A Venturi contraction is introduced in a 30 in. diameter horizontal pipe. The area of the pipe is six times that of the throat. The upper end of a vertical cylinder 12 in. in diameter is connected by a pipe to the throat and the lower end to the beginning of the convergence. Neglecting friction losses, and the thickness of the piston in the cylinder, determine the flow through the pipe in cusecs at which the piston begins to rise when the gross effective load—piston, piston rod, and external weight—on the piston rod is 450 lb. The piston rod is $1\frac{1}{2}$ in. diameter, and passes through both ends of the cylinder. (A.M.I. Civil E., 1922.)

Ans.—20.4.

(20) State Bernoulli's Theorem. The diameter of a pipe changes gradually from 6 in. at a point A , 20 ft. above datum, to 3 in. at B , 10 ft. above datum. The pressure at A is 15 lb. per sq. in., and the velocity of flow 12 ft. per sec. Neglecting losses between A and B , determine the pressure at B . (A.M.I. Mech. E., 1925.)

Ans.—4.82 lb. per sq. in.

(21) A closed vertical cylinder of 3 ft. internal diameter is filled with water and rotates about its axis at 950 revs. per min. Neglecting the effect of the shaft, find the total pressure of the water against the top of the cylinder. (London Univ., 1923.)

Ans.—76,500 lb.

CHAPTER IV

ORIFICES AND MOUTHPIECES

30. Flow Through Orifices. Supposing a tank containing water were to have a hole made in the side or base through which the water would flow, such a hole is termed an orifice, and the quantity of water which would flow through this orifice in a given time would partly depend on the shape, size, and form of the orifice. There would be a certain amount of frictional resistance at the sides of the orifice ; this may be reduced by




FIG. 33

making them sharp-edged. The jet of water, in passing through the orifice, will contract in area, which will further reduce the rate of discharge. This contraction of area is caused by the water in the tank around the sides of the orifice, which, in flowing to the orifice, will have a motion parallel to it and perpendicular to that of the jet (Fig. 33). The velocity

in this direction is destroyed on reaching the orifice ; this causes a lateral force on the jet and a consequent reduction of area. The contraction of area will depend on the shape and size of the orifice and on the head causing flow.

The section of the jet at which the stream lines first become parallel is known as the vena contracta. This section is the line *aa* in Fig. 33. The velocity at the vena contracta has reached its maximum and there will be no further contraction of the jet beyond this section.

31. The Coefficient of Contraction. The ratio between the area of the orifice and the area of the jet at the vena contracta is known as the coefficient of contraction.

Let C_c = coefficient of contraction

Then, $C_c = \frac{\text{area of jet at vena contracta}}{\text{area of orifice}}$

This coefficient varies slightly with the head and with the size and shape of the orifice. An average value for small, sharp-edged orifices is .64.

The coefficient of discharge may be found experimentally by direct measurement of the area of jet at the vena contracta. This may be done with the instrument shown in Fig. 34. It consists of a small collar or ring having four radial screws, equally spaced. The ring is held at the vena contracta so that the jet passes through its centre. The screws are then adjusted until all their points are in contact with the surface of the jet. The instrument is then removed and the space between the screw points measured. Micrometer screws may be used.




FIG. 34

This method is not very satisfactory in practice as the section of the jet is not absolutely regular; also, it is difficult to adjust the instrument so that all four screws are just in contact with the surface simultaneously.

A more accurate method of finding C_v is given at the end of Art. 33.

32. The Coefficient of Velocity. The ratio between the theoretical velocity and the actual velocity of the jet at the vena contracta is known as the coefficient of velocity.

Let C_v = coefficient of velocity

Then, $C_v = \frac{\text{actual velocity at vena contracta}}{\text{theoretical velocity}}$

Let H = head causing flow

v = actual velocity

Then, $C_v = \frac{v}{\sqrt{2gH}}$

Or, $v = C_v \sqrt{2gH}$

The difference between the theoretical and actual velocities is due to friction at the orifice and is very small for sharp-edged orifices. The coefficient of velocity will vary slightly

for different orifices, depending on the shape and size of the orifice and on the head. An average value for C_v is about .97.

The coefficient C_v may be found experimentally for a vertical orifice by measuring the horizontal and vertical co-ordinates of the issuing jet.

Consider the tank in Fig. 35.

Let H = height of water in feet above centre of orifice

aa = vena contracta

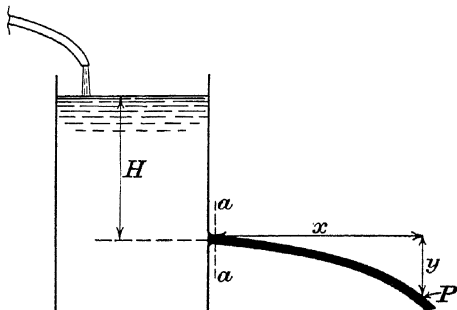


FIG. 35

The jet of water has a horizontal velocity of v but is acted upon by gravity with a downward acceleration of g . Consider a particle of water in the jet at P and let the time taken for this particle to move from aa to P be t sec.

Let x = horizontal co-ordinate of P from aa in ft.

y = vertical co-ordinate of P from aa in ft.

Then, $x = vt$

and, $y = \frac{1}{2}gt^2$

Equating the values of t^2 from these two equations,

$$\frac{x^2}{v^2} = \frac{2y}{g}$$

$$\text{Or, } v = \sqrt{\frac{g x^2}{2y}}$$

$$\text{But, } C_v = \frac{v}{\sqrt{2gH}}$$

Substituting for v ,

$$C_v = \sqrt{\frac{x^2}{4yH}}$$

The value of C_v can be found from this equation by measuring the distances x and y for a certain point on the jet and for a known value of H .

The coefficient of velocity may also be found by measuring the actual velocity of the jet with a Pitot tube.

EXAMPLE.

In order to determine the coefficient of velocity of a small circular sharp-edged orifice under low heads, the horizontal and vertical co-ordinates of the jet were measured when the head was 8 in. The horizontal co-ordinate of a certain point of jet, from the vena contracta, was found to be 32.5 in., whilst the vertical co-ordinate for the same point was 33.7 in. Find the coefficient of velocity.

$$C_v = \sqrt{\frac{x^2}{4yH}}$$

where $H = 8$ in.

$$x = 32.5 \text{ in.}$$

and $y = 33.7$ in.

$$\begin{aligned}\text{Then, } C_v &= \sqrt{\frac{(32.5)^2}{4 \times 33.7 \times 8}} \\ &= .988\end{aligned}$$

✓ **33. The Coefficient of Discharge.** Owing to the reduction in velocity and to the contraction of the jet, the actual discharge will be much less than the theoretical; the relation between them being known as the coefficient of discharge.

Let C_d = coefficient of discharge

$$\text{Then, } C_d = \frac{\text{actual discharge}}{\text{theoretical discharge}}$$

But, actual discharge = actual velocity of jet
× actual area of jet

$$= C_v \sqrt{2gH} \times C_c A$$

where A = area of orifice

$$\text{Therefore, actual discharge} = C_v C_c \sqrt{2gH} \times A$$

But, $A \sqrt{2gH}$ = theoretical discharge

$$\text{Therefore, } C_d = C_v \times C_c$$

The coefficient of discharge of an orifice may therefore be found by first determining its C_v and C_c and by multiplying these together.

The coefficient of discharge will also vary with the head and type of orifice. Usually, its value is between .61 and .64.

The simplest manner of determining the coefficient of discharge is by actually measuring the quantity of water discharged through the orifice in a given time under a known constant head, and by dividing this quantity by the theoretical discharge.

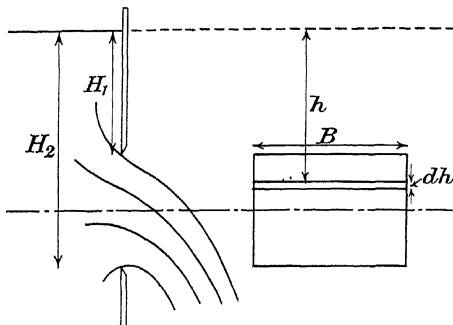


FIG. 36

Let Q be the volume of water in cubic feet actually discharged in a time t sec.

$$\text{Then, } C_d = \frac{Q}{A \sqrt{2g H} t}$$

A good method of finding the coefficient of contraction is to find the value of C_d by the above method, then $C_c = \frac{C_d}{C_v}$.

34. Large Vertical Orifices. If a vertical orifice is large compared with the head, the velocity of the water may no longer be regarded as constant, as the variation in head at different vertical sections of the orifice will be considerable.

Consider the large orifice in Fig. 36. Let the height of the water level be H_1 above the top of the orifice and H_2 above the lower edge. Let B be the breadth of the orifice.

Consider a horizontal strip of the orifice of depth h and thickness dh .

$$\text{Area of strip} = B dh$$

$$\text{Velocity of water through strip} = \sqrt{2g h}$$

$$\begin{aligned} \text{Discharge through strip} &= C_d \times \text{area} \times \text{velocity} \\ &= C_d B dh \sqrt{2g h} \end{aligned}$$

$$\begin{aligned} \text{Total discharge} &= C_d B \sqrt{2g} \int_{H_1}^{H_2} h^{\frac{3}{2}} dh \\ &= \frac{2}{3} C_d B \sqrt{2g} \left[h^{\frac{3}{2}} \right]_{H_1}^{H_2} \\ &= \frac{2}{3} C_d B \sqrt{2g} (H_2^{\frac{3}{2}} - H_1^{\frac{3}{2}}) \end{aligned}$$

EXAMPLE.

A rectangular orifice in the side of a large tank is 4 ft. broad and 2 ft. deep. The level of the water in the tank is 2 ft. above the top edge of the orifice. Find the quantity of water flowing through the orifice per second if the coefficient of discharge is .62.

$$\begin{aligned} \text{Discharge} &= \frac{2}{3} C_d \sqrt{2g} B (H_2^{\frac{3}{2}} - H_1^{\frac{3}{2}}) \\ &= \frac{2}{3} \times .62 \times \sqrt{64 \cdot 4} \times 4 (4^{\frac{3}{2}} - 2^{\frac{3}{2}}) \\ &= 68.8 \text{ cu. ft. per sec.} \end{aligned}$$

35. Drowned Orifices. If an orifice does not discharge into the atmosphere, but discharges into more water, the whole of the outlet side of the orifice being under water, it is known as a drowned or submerged orifice. If the outlet side of the orifice is only partly under water it is known as a partially submerged or drowned orifice.

In a drowned orifice the discharge of the jet is interfered with by the water on the outlet side. This has the effect of slightly reducing the coefficient of discharge; the discharge will, therefore, be less for a drowned orifice than for a free, assuming the net head causing flow to be the same.

The discharge through a drowned orifice may be obtained from the same equations as for an orifice running free, excepting that the head causing flow will be the difference between the heads on either side of the orifice.

The discharge through a partially drowned orifice may be found by treating the lower portion as a drowned orifice and the upper portion as an orifice running free and by adding together the two discharges thus found.




FIG. 37

EXAMPLE.

An orifice in the side of a large tank is rectangular in shape, 4 ft. broad and 2 ft. deep. The water level on one side of the orifice is 4 ft. above the top edge; the water level on the other side of the orifice is 1 ft. below the top edge. Find the discharge per second if $C_d = .62$.

The orifice in the question is partially drowned; the lower half may be treated as a drowned orifice and the upper half as a free orifice.

Considering upper half of orifice,

$$\begin{aligned}
 \text{discharge} &= \frac{2}{3} C_d B \sqrt{2g} (H_2^{\frac{3}{2}} - H_1^{\frac{3}{2}}) \\
 &= \frac{2}{3} \times .62 \times \sqrt{64 \cdot 4} \times 4 (5^{\frac{3}{2}} - 4^{\frac{3}{2}}) \\
 &= 42.2 \text{ cu. ft. per sec.}
 \end{aligned}$$

Consider lower half of orifice,

head causing flow = 5 ft.

$$\begin{aligned}
 \text{Discharge} &= C_d \sqrt{2g} \times \text{area} \times \sqrt{H} \\
 &= .62 \sqrt{64 \cdot 4} \times 4 \times \sqrt{5} \\
 &= 44.5 \text{ cu. ft. per sec.}
 \end{aligned}$$

Total discharge = 42.2 + 44.5

$$= 86.7 \text{ cu. ft. per sec.}$$

36. Time of Emptying Tank. Consider a tank of uniform cross-sectional area A (Fig. 37), then let the water be discharged through an orifice in the base of the tank so that the water level falls from a height H_1 to a height H_2 in t sec. The rate of discharge through the orifice will decrease as the water level falls.

Let a = area of orifice

v = velocity of water passing through orifice at any particular instant

At any particular instant let the water level be at a height h above the orifice and let the level fall by a small amount dh in the time dt . Let the corresponding quantity of water passing through the orifice due to this small change of water level be dq .

Then, as volume displaced by water level equals quantity flowing through orifice,

$$dq = A dh = C_a a v dt$$

But, $v = \sqrt{2g h}$

Therefore, $A dh = C_a a \sqrt{2g h} dt$

Or,
$$dt = \frac{A dh}{C_a a \sqrt{2g h}}$$

$$= \frac{A h^{-\frac{1}{2}} dh}{C_a a \sqrt{2g}}$$

Then, total time taken $= t = \frac{A}{C_a a \sqrt{2g}} \int_{H_2}^{H_1} h^{-\frac{1}{2}} dh$

$$= \frac{2A}{C_a a \sqrt{2g}} \left[h^{\frac{1}{2}} \right]_{H_2}^{H_1}$$

$$= \frac{2A}{C_a a \sqrt{2g}} (H_1^{\frac{1}{2}} - H_2^{\frac{1}{2}}) \quad . \quad . \quad (1)$$

If the tank is completely emptied, $H_2 = 0$

Then,
$$t = \frac{2A}{C_a a \sqrt{2g}} \sqrt{H_1} \quad . \quad . \quad . \quad (2)$$

37. Time of Emptying Hemispherical Vessel. The time taken to lower the water level in a hemispherical vessel may be found in the same manner as in Art. 36; but in this case the cross-sectional area of the vessel is not uniform (Fig. 38).

Let R be the radius of vessel and let the water level fall from H_1 to H_2 in the time t .

Consider the instant when the water level is at a height h , and let the radius of the vessel's cross-section at this level be x .

Let a small quantity dq flow through the orifice at the base in a time dt , and let the corresponding fall of water level due to this be dh .

Let a = area of orifice

and v = theoretical velocity of water passing through orifice at time considered

$$= \sqrt{2g h}$$

As volume displaced by water level equals volume flowing through orifice,




FIG. 38

$$\begin{aligned} dq &= \pi x^2 dh = C_d a v dt \\ &= C_d a \sqrt{2g h} dt \end{aligned}$$

But, from Fig. 38,

$$\begin{aligned} x^2 &= R^2 - (R - h)^2 \\ &= 2Rh - h^2 \end{aligned}$$

$$\begin{aligned} \text{Therefore, } dt &= \frac{\pi(2Rh - h^2)dh}{C_d a \sqrt{2g h}} \\ &= \frac{\pi(2Rh - h^2)h^{-\frac{1}{2}}dh}{C_d a \sqrt{2g}} \end{aligned}$$

$$\begin{aligned} \left. \begin{array}{l} \text{Total time required} \\ \text{to lower water level} \end{array} \right\} &= \frac{\pi}{C_d a \sqrt{2g}} \int_{H_2}^{H_1} (2Rh^{\frac{1}{2}} - h^{\frac{3}{2}}) dh \\ &= \frac{\pi}{C_d a \sqrt{2g}} \left[\frac{4}{3} Rh^{\frac{3}{2}} - \frac{2}{5} h^{\frac{5}{2}} \right]_{H_2}^{H_1} \\ &= \frac{2\pi}{C_d a \sqrt{2g}} \left\{ \frac{2}{3} R(H_1^{\frac{3}{2}} - H_2^{\frac{3}{2}}) - \frac{1}{5} (H_1^{\frac{5}{2}} - H_2^{\frac{5}{2}}) \right\} \quad (1) \end{aligned}$$

If the vessel were full at the commencement and is completely emptied, then :

$$H_1 = R$$

$$\text{and } H_2 = 0$$

Equation (1) then becomes,

$$\begin{aligned} t &= \frac{2\pi}{C_d a \sqrt{2g}} \left(\frac{2}{3} R^{\frac{3}{2}} - \frac{1}{5} R^{\frac{5}{2}} \right) \\ &= \frac{14 \pi R^{\frac{3}{2}}}{15 C_d a \sqrt{2g}} \quad (2) \end{aligned}$$

EXAMPLE.

A hemispherical tank 12 ft. in diameter is emptied through a hole, 8 in. diameter, at the bottom. Assuming that the coefficient of discharge is .6, find the time required to lower the level of the water surface from 6 ft. to 4 ft., and deduce the formula you use. (London Univ., 1913.)

Using Equation 1,

$$\begin{aligned}
 t &= \frac{2\pi}{C_d a \sqrt{2g}} \left\{ \frac{2}{3} R \left(H_1^{\frac{3}{2}} - H_2^{\frac{3}{2}} \right) - \frac{1}{5} (H_1^{\frac{5}{2}} - H_2^{\frac{5}{2}}) \right\} \\
 &= \frac{2\pi}{.6 \times \frac{\pi}{4} \times \frac{4}{9} \sqrt{64 \cdot 4}} \left\{ \frac{2}{3} \times 6 (6^{\frac{3}{2}} - 4^{\frac{3}{2}}) - \frac{1}{5} (6^{\frac{5}{2}} - 4^{\frac{5}{2}}) \right\} \\
 &= 58.2 \text{ sec.}
 \end{aligned}$$

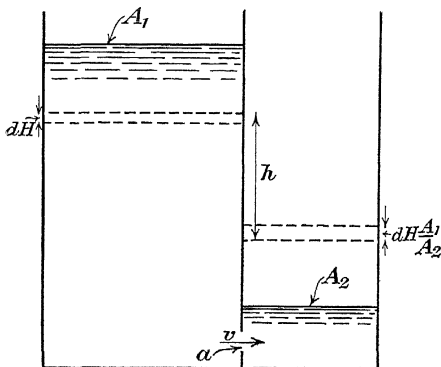


FIG. 39

38. Time of Flow from One Vessel to Another. Suppose water is flowing from one vessel into another (Fig. 39), so that as the water level falls in one vessel it will rise by a corresponding amount in the other. In this case, the orifice will be drowned and the head causing flow at any instant will be the difference between the two water levels at that instant.

Let the water flow from a vessel of area A_1 into a vessel of area A_2 , and let a be the area of the orifice between the vessels. Let the difference of head between the two vessels be H_1 at the beginning; it is required to find the time taken for the difference of head to reach H_2 .

Let v = theoretical velocity of flow through orifice.

At a certain instant let the difference of head between the

two vessels be h , and let a small quantity dq flow through the orifice in the time dt . This will cause the water level in A_1 to fall by the small amount dH ; the water level in A_2 will rise, therefore, by the amount $dH \frac{A_1}{A_2}$.

$$\begin{aligned}\text{New difference of head} &= h - dH - dH \frac{A_1}{A_2} \\ &= h - dH \left(1 + \frac{A_1}{A_2}\right)\end{aligned}$$

$$\text{Therefore, change of head causing flow} = dh = dH \left(1 + \frac{A_1}{A_2}\right)$$

$$\text{Or,} \quad dH = \frac{dh}{\left(1 + \frac{A_1}{A_2}\right)} \quad . \quad . \quad . \quad . \quad (1)$$

As quantity flowing from A_1 equals quantity flowing through orifice,

$$dq = A_1 dH = C_a a v dt$$

$$\text{But} \quad v = \sqrt{2g h}$$

$$\text{Therefore,} \quad dt = \frac{A_1 dH}{C_a a \sqrt{2g h}}$$

Substituting from Equation (1),

$$dt = \frac{A_1 dh}{C_a a \left(1 + \frac{A_1}{A_2}\right) \sqrt{2g h}}$$

$$\text{Or,} \quad dt = \frac{A_1 h^{-\frac{1}{2}} dh}{C_a a \left(1 + \frac{A_1}{A_2}\right) \sqrt{2g}}$$

$$\begin{aligned}\text{Total time taken} &= \frac{A_1}{C_a a \left(1 + \frac{A_1}{A_2}\right) \sqrt{2g}} \int_{H_2}^{H_1} h^{-\frac{1}{2}} dh \\ &= \frac{2A_1}{C_a a \left(1 + \frac{A_1}{A_2}\right) \sqrt{2g}} \left[h^{\frac{1}{2}} \right]_{H_2}^{H_1} \\ &= \frac{2A_1 (H_1^{\frac{1}{2}} - H_2^{\frac{1}{2}})}{C_a a \left(1 + \frac{A_1}{A_2}\right) \sqrt{2g}} \quad . \quad . \quad . \quad (2)\end{aligned}$$

If both the vessels have the same area,

$$A_1 = A_2$$

$$\text{Then,} \quad t = \frac{A_1 (H_1^{\frac{1}{2}} - H_2^{\frac{1}{2}})}{C_d a \sqrt{2g}} \quad . \quad . \quad . \quad (3)$$

It will be noticed that the time taken to reduce the difference of water level between two vessels of different areas is the same whether the water flows from the larger to the smaller or from the smaller to the larger, providing the reduction in water level is the same in each case.

EXAMPLE.

A tank 10 ft. long and 5 ft. wide is divided into two parts by a partition so that the area of one part is three times the area of the other. The partition contains a square orifice of 3 in. sides through which the water may flow from one part to the other. If the water level in the smaller division is 10 ft. above that of the larger, find the time taken to reduce the difference of water level to 2 ft. $C_d = .62$.

$$A_1 = 5 \times 2\frac{1}{2} = 12\frac{1}{2} \text{ sq. ft.}$$

$$A_2 = 5 \times 7\frac{1}{2} = 37\frac{1}{2} \text{ sq. ft.}$$

$$H_1 = 10 \text{ ft.}$$

$$H_2 = 2 \text{ ft.}$$

$$a = \frac{3 \times 3}{144} = \frac{1}{16} \text{ sq. ft.}$$

Using Equation (2),

$$\begin{aligned} t &= \frac{2A_1 (H_1^{\frac{1}{2}} - H_2^{\frac{1}{2}})}{C_d a \left(1 + \frac{A_1}{A_2}\right) \sqrt{2g}} \\ &= \frac{2 \times 12.5 (\sqrt{10} - \sqrt{2})}{.62 \times \frac{1}{16} \left(1 + \frac{1}{3}\right) \sqrt{64.4}} \end{aligned}$$

$$= 105.5 \text{ sec.}$$

39. Losses of Head of Flowing Water. Water flowing along a straight uniform passage with perfectly smooth walls would suffer no loss of energy, as there would be no resistance. It is

not possible in practice to obtain this condition, on account of the frictional resistance of the sides of the passage. The loss of energy due to such a resistance is usually expressed as a head in feet of water. Flowing water will also be subjected to losses of head due to changes of section, changes of direction, and obstructions. All such losses are expressed in terms of the velocity head.

(a) LOSS OF HEAD DUE TO FRICTION OF SIDES OF PASSAGE.

This loss is expressed as a function of $\frac{v^2}{2g}$ and will depend on the length and diameter of the pipe, the material of which the pipe is made, and the nature of the surface. This loss is dealt with fully in a subsequent chapter.

(b) LOSS OF HEAD DUE TO CHANGE OF DIRECTION. This loss is due to the resistance of sharp bends and elbows, and is expressed as a function of $\frac{v^2}{2g}$.

$$\text{Or, loss of head} = k \frac{v^2}{2g},$$

where k is a coefficient found by experiment and depends on the radius of the bend and the angle of deviation. For 90° elbows, k is found to be approximately unity. The loss of energy due to a sudden change of direction is ultimately lost in the friction of the eddies formed.

(c) LOSS OF HEAD DUE TO CHANGE OF SECTION OF PASSAGE. Losses of head under this heading are due to a sudden enlargement of section, a sudden contraction, and the loss at entrance of a pipe. There are also losses due to a gradual enlargement or contraction of the section ; but as these are extremely small, they are usually neglected.

(d) LOSS OF HEAD DUE TO OBSTRUCTION IN PASSAGE. Any obstruction in the passage, such as a diaphragm or a projection from the passage walls, will interfere with the steady flow of the water and form eddies, the energy of which will be ultimately lost in friction.

An obstruction will cause a contraction of the area of flow which will be followed by an enlargement when the obstruction is passed. The loss of head will be due to this sudden enlargement.

SUMMARY OF LOSSES OF HEAD.

$$(a) \text{ Loss of head due to friction} = \frac{4fl}{d} \frac{v^2}{2g} \quad (\text{Art. 59})$$

$$(b) \text{ Loss of head due to bends and elbows} = k \frac{v^2}{2g}$$

$$(c) \text{ Loss of head due to sudden enlargement} = \frac{(v_1 - v_2)^2}{2g} \quad (\text{Art. 40})$$

$$\text{Loss of head due to sudden contraction} = .5 \frac{v^2}{2g} \quad (\text{Art. 41})$$

$$\text{Loss of head at entrance to pipe} = .5 \frac{v^2}{2g} \quad (\text{Art. 42})$$

$$(d) \text{ Loss of head due to obstruction} = \left[\frac{A}{.66(A-a)} - 1 \right]^2 \frac{v^2}{2g} \quad (\text{Art. 43})$$

40. Loss of Head Due to a Sudden Enlargement. Consider water flowing along a pipe of area a_1 , with a velocity v_1 and a pressure p_1 ; let the pipe be suddenly enlarged to an area a_2 , and let the velocity of the water in the enlarged section be v_2 and the pressure p_2 (Fig. 40). The water will flow by the enlargement as shown in the figure, and a backwash of eddies will be formed in the corner. It is the formation of these eddies which cause the loss of head.




FIG. 40

The eddies press on the annular ring of area $a_2 - a_1$ with a pressure of p_o lb. per sq. in. It is found by experiment that p_o is approximately equal to p_1 and it is on this assumption that the solution is obtained.

Consider the quantity of water between aa and bb . The resultant force acting on this mass of water is :

$$p_2 a_2 - p_1 a_1 - p_o(a_2 - a_1)$$

$$\text{Assuming} \quad p_o = p_1,$$

$$\text{Total force} = a_2(p_2 - p_1)$$

The change of momentum per second of this mass of water is

$$\frac{w a_1 v_1^2}{g} - \frac{w a_2 v_2^2}{g}$$

But, $a_1 v_1 = a_2 v_2$

Therefore, change of momentum per second

$$= \frac{w a_2 v_2 v_1}{g} - \frac{w a_2 v_2^2}{g}$$

Then, as force equals change of momentum per second,

$$a_2(p_2 - p_1) = w a_2 \left(\frac{v_2 v_1}{g} - \frac{v_2^2}{g} \right)$$

Or, $\frac{p_2}{w} - \frac{p_1}{w} = \frac{v_2 v_1}{g} - \frac{v_2^2}{g}$

Adding $-\frac{v_1^2}{2g}$ to both sides of this equation :

$$\begin{aligned} \frac{p_2}{w} - \frac{p_1}{w} - \frac{v_1^2}{2g} &= \frac{v_2 v_1}{g} - \frac{v_2^2}{g} - \frac{v_1^2}{2g} = -\frac{v_2^2}{2g} - \left(\frac{v_1^2}{2g} - \frac{2 v_2 v_1}{2g} + \frac{v_2^2}{2g} \right) \\ &= -\frac{v_2^2}{2g} - \frac{(v_1 - v_2)^2}{2g} \end{aligned}$$

Therefore, $\frac{p_2}{w} + \frac{v_2^2}{2g} + \frac{(v_1 - v_2)^2}{2g} = \frac{p_1}{w} + \frac{v_1^2}{2g}$

But, by applying Bernoulli's equation to sections *aa* and *bb*,

$$\frac{p_2}{w} + \frac{v_2^2}{2g} = \frac{p_1}{w} + \frac{v_1^2}{2g}$$

Therefore, the amount $\frac{(v_1 - v_2)^2}{2g}$ represents the loss of head between sections *aa* and *bb*. This loss of head is due to the sudden enlargement.

EXAMPLE.

A pipe of diameter 6 in. is suddenly enlarged to a diameter of 1 ft. Find the loss of head due to this enlargement when the quantity of water flowing is 4 cu. ft. per sec.

$$\text{Velocity in 6 in. pipe} = \frac{q}{\text{area}} = \frac{4}{\frac{\pi}{4} \times (\frac{1}{2})^2} = 20.4 \text{ cu. ft. per sec.}$$

$$\text{Velocity in 12 in. pipe} = \frac{4}{\frac{\pi}{4}} = 5.1 \text{ cu. ft. per sec.}$$

$$\begin{aligned} \text{Loss of head} &= \frac{(v_1 - v_2)^2}{2g} \\ &= \frac{(20.4 - 5.1)^2}{64.4} \\ &= 3.64 \text{ ft. of water.} \end{aligned}$$

41. Loss of Head due to a Sudden Contraction. The loss of head due to a sudden contraction is not due to the contraction itself but to the sudden enlargement which follows the contraction.

Consider the pipe in Fig. 41. Let the pipe change section from an area of a_1 to an area of a .

The water, in flowing into the narrow section, will be further contracted at the section aa , forming a vena contracta in the same way as a jet issuing from an orifice. Let the velocity at aa be v_c and let the contracted area be a_c .

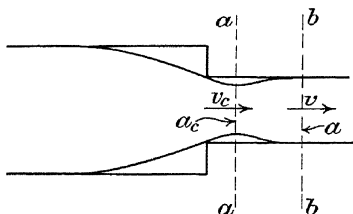


FIG. 41

Then, $a_c = C_c a$

where C_c is the coefficient of contraction.

Let v = velocity of water at the section bb .

At the section bb the jet of water will have expanded and filled the pipe; consequently, there will be a loss of head between aa and bb due to this expansion.

$$\text{Loss of head} = \frac{(v_c - v)^2}{2g} \quad (\text{Art. 40})$$

$$\begin{aligned} \text{But,} \quad av &= a_c v_c \\ &= C_c a v_c \end{aligned}$$

Therefore, $v_c = \frac{v}{C_c}$

Then, loss of head $= \frac{v^2 \left(\frac{1}{C_c} - 1 \right)^2}{2g}$

Assuming C_c to be .62 for a circular orifice,

$$\begin{aligned} \text{Loss of head} &= \left(\frac{1}{.62} - 1 \right)^2 \frac{v^2}{2g} \\ &= .375 \frac{v^2}{2g} \end{aligned}$$

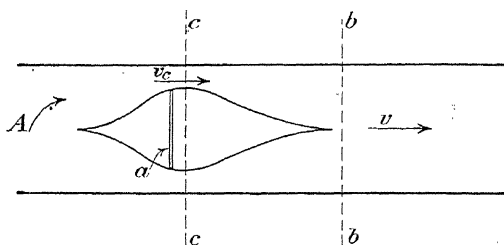


FIG. 42

It is found by experiment that the actual value of the constant is nearer .5 than .375; this higher value is generally used.

Then, loss of head due to sudden contraction $= .5 \frac{v^2}{2g}$

42. Loss of Head at Entrance to Pipe. The loss of head due to the water entering a pipe from a large container is actually a loss due to a sudden contraction.

Let v = velocity in pipe.

Then, loss of head at entrance $= .5 \frac{v^2}{2g}$

In cases of water flowing along long pipes, this loss of head is very small compared with the frictional loss and may be neglected.

43. Loss of Head due to Obstruction. The loss of head due to an obstruction in a pipe may be looked upon as due to the sudden enlargement beyond the obstruction.

Consider a pipe of cross-sectional area A (Fig. 42), and let

an obstruction of area a be placed in the pipe. The water will flow in stream lines by the obstruction, the vena contracta occurring just beyond at the section cc .

Let v = velocity of water in free section of pipe

v_c = velocity at vena contracta

bb = a section of normal flow beyond the obstruction

There will be a loss of head due to the enlargement between

the sections cc and bb equal to $\frac{(v_c - v)^2}{2g}$

Area of section of flow at cc = $C_c (A - a)$,

where C_c = coefficient of contraction

Also, $v_c C_c (A - a) = v A$

Therefore, $v_c = \frac{A v}{C_c (A - a)}$

Then, loss of head $= \left[\frac{A}{C_c (A - a)} - 1 \right]^2 \frac{v^2}{2g}$

Assuming the coefficient of contraction = .66,

loss of head due to obstruction $= \left[\frac{A}{.66 (A - a)} - 1 \right]^2 \frac{v^2}{2g}$

EXAMPLE.

The passage of water through a 6 in. pipe is restricted by a diaphragm with a 2 in. diameter hole in its centre. The loss of head at the diaphragm when the velocity in the pipe is .59 ft. per sec. equals 1.25 ft. Assuming the head lost $= k \frac{V^2}{2g}$ where V = the velocity of water in the pipe, find C_c the coefficient of contraction of the stream passing through the diaphragm. (London Univ., 1913.)

In this case the area of flow at the obstruction $= \frac{\pi}{4} (2)^2$

Then, loss of head $= \left[\frac{A}{C_c (A - a)} - 1 \right]^2 \frac{v^2}{2g}$

$$25 = \left[\frac{\frac{\pi}{4} (6)^2}{C_c \frac{\pi}{4} (2)^2} - 1 \right]^2 \frac{(.59)^2}{2g}$$

$$\frac{9}{C_c} = 15.22 + 1$$

$$C_c = .555$$

44. External Mouthpiece. The discharge through an orifice may be increased by fitting a short length of pipe to the outside. Consider the vessel in Fig. 43 to be discharging water through a short length of pipe under a head H . The jet, on entering the pipe, will at first contract and then expand and fill the pipe. Let H_a be the atmospheric pressure in feet of water. The pressure at the outlet of the pipe will be at atmospheric; but, as the velocity of the vena contracta is larger than that at outlet, the pressure at the vena contracta will be less than atmospheric.

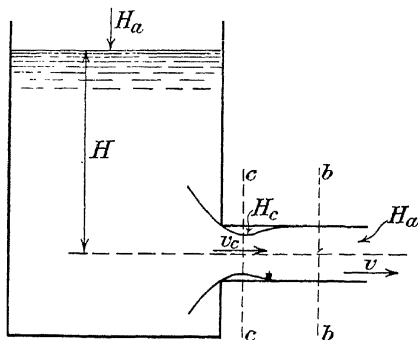


FIG. 43

As the pipe is flowing full at outlet, the coefficient of contraction will be unity. The coefficient of velocity may be calculated by applying Bernoulli's equation to certain sections of the water.

Let a = area of pipe

a_c = area of flow at vena contracta

v = velocity at outlet of pipe

v_c = velocity at vena contracta

H_c = absolute pressure in ft. of water at vena contracta

Assuming coefficient of contraction at vena contracta to be .62,

$$a_c = C_c a$$

$$= .62a$$

As quantity flowing at section cc equals quantity flowing at bb ,

$$\begin{aligned} v_c a_c &= v a \\ v_c &= v \frac{a}{a_c} \quad . \quad . \quad . \quad . \quad (1) \\ &= \frac{v}{.62} \end{aligned}$$

Owing to the enlarging of the section between cc and bb , there will be a loss of head of $\frac{(v_c - v)^2}{2g}$. (Art. 40.)

Substituting the value of v_c ,

$$\begin{aligned} \text{loss of head} &= \frac{\left(\frac{v}{.62} - v\right)^2}{2g} \\ &= .375 \frac{v^2}{2g} \end{aligned}$$

Applying Bernoulli's equation to free water surface in tank and bb ,

$$H_a + H = H_a + \frac{v^2}{2g} + \text{loss of head}$$

$$\begin{aligned} \text{Therefore, } H &= \frac{v^2}{2g} + .375 \frac{v^2}{2g} \\ &= 1.375 \frac{v^2}{2g} \quad . \quad . \quad . \quad . \quad (2) \end{aligned}$$

$$\text{Therefore } C_v = \frac{1}{\sqrt{1.375}} = .855$$

$$\begin{aligned} \text{Then, } C_d &= C_v \times C_c \\ &= .855 \end{aligned}$$

as $C_c = 1$.

The coefficient of discharge is thus considerably increased by fitting an external mouthpiece.

In order to find the pressure at the vena contracta, apply Bernoulli's equation to the water surface in the tank and to the section cc .

$$H_a + H = H_c + \frac{v_c^2}{2g}$$

But, from Equation (1), $v_c = \frac{v}{.62}$

and, from Equation (2), $H = 1.375 \frac{v^2}{2g}$

Then, $H_a + 1.375 \frac{v^2}{2g} = H_c + 2.6 \frac{v^2}{2g}$

Therefore, $H_c = H_a - 1.225 \frac{v^2}{2g}$. . . (3)
 $= H_a - .89H$

Or, the pressure at the vena contracta is $1.225 \frac{v^2}{2g}$ or $.89H$




FIG. 44

less than atmospheric.

The effect of the mouthpiece on the discharge is to decrease the pressure at the vena contracta and thus increase the effective head causing flow.

It is found by experiment that the frictional resistance at the entrance to the mouthpiece reduces the coefficient of discharge from .855 to .813. The effect of this

frictional resistance on the pressure at the vena contracta is to reduce the vacuum pressure to about $.74H$.

It will be noticed that the pressure at the vena contracta will be zero when $.74H = 34$ ft. of water. If this condition were reached, separation would take place and the flow of the water would no longer be steady. In practice this takes place before zero pressure is reached.

In this type of mouthpiece the length of pipe must be at least three diameters in order for the pipe to run full.

By making the mouthpiece to the shape of the jet up to the vena contracta, as in Fig. 44, the loss due to the enlargement is eliminated. This will make the theoretical coefficient of discharge equal to unity. Such a mouthpiece is known as a convergent mouthpiece. Actually, owing to frictional loss, the coefficient of discharge for this mouthpiece is about .975.

By making the mouthpiece divergent, the loss due to the enlargement of the jet may be considerably reduced. In this

type the mouthpiece is sometimes made convergent up to the vena contracta and then diverges as in Fig. 45. As the divergence increases, the velocity at cc increases; this will cause an increase in the vacuum pressure at the vena contracta; and, as this cannot be greater than 34 ft. theoretically, or 26 ft. actually, there is a limit to the amount of divergence if a steady flow is to be maintained.




FIG. 45

Applying Bernoulli's equation to water level and to sections cc and bb (Fig. 45),

$$H_a + H = H_c + \frac{v_c^2}{2g} = H_a + \frac{v^2}{2g}$$

From which, $\frac{v^2}{2g} = H$

and, $\frac{v_c^2}{2g} = H + H_a - H_c$

But, $\frac{a}{a_c} = \frac{v_c}{v}$

$$= \frac{\sqrt{2g(H + H_a - H_c)}}{\sqrt{2gH}}$$

$$= \sqrt{1 + \frac{H_a - H_c}{H}}$$

Then, assuming the maximum vacuum pressure to be 26 ft.,

maximum ratio of $\frac{a}{a_c} = \sqrt{1 + \frac{26}{H}}$

EXAMPLE.

Water is discharged through an external cylindrical mouthpiece, of 4 sq. in. area, under a head of 10 ft. Find the discharge and the pressure at the vena contracta. Coefficient of contraction = .64.

Applying Bernoulli's equation to water surface and outlet end of mouthpiece,

$$10 = \frac{v^2}{2g} + \frac{(v_c - v)^2}{2g}$$

But,
$$v_c = \frac{v}{.64}$$

Then,
$$10 = \frac{v^2}{2g} + \frac{\left(\frac{v}{.64} - v\right)^2}{2g}$$

$$= \frac{1.316 v^2}{2g}$$

Therefore,
$$v = 22.18 \text{ cu. ft. per sec.}$$

Discharge = $av = \frac{4}{144} \times 22.18 = .616 \text{ cu. ft. per sec.}$

$$v_c = \frac{v}{.64} = 34.6 \text{ ft. per sec.}$$

Applying Bernoulli's equation to water surface and vena contracta,

$$34 + 10 = H_c + \frac{v_c^2}{2g}$$

Therefore,
$$H_c = 44 - \frac{(34.6)^2}{2g} = 25.4 \text{ ft. of water absolute.}$$

45. Re-entrant or Borda's Mouthpiece. An internal mouthpiece, such as shown in Fig. 46, is known as a re-entrant or Borda mouthpiece. If the jet, after contraction, does not touch the sides of the mouthpiece, as in Fig. 46, it is said to be running free. If, after contraction, the jet expands and fills the mouthpiece, as in Fig. 47, it is said to be running full.

Consider the mouthpiece of Fig. 46. In this case the mouthpiece is running free.

Let H = height of water surface above centre of mouthpiece
 a = area of mouthpiece
 v = velocity of flow through mouthpiece
 a_c = contracted area of jet




FIG. 46




FIG. 47

As force equals rate of change of momentum, total pressure at entrance = change of momentum per second.

$$\text{Or,} \quad p a = \frac{(w a_c v) v}{g}$$

Substituting $p = wH$,

$$w a H = w a_c \frac{v^2}{g}$$

$$\text{But,} \quad H = \frac{v^2}{2g}$$

$$\text{Therefore,} \quad \frac{a v^2}{2g} = a_c \frac{v^2}{g}$$

$$\text{Or,} \quad a_c = \frac{a}{2}$$

That is, the coefficient of contraction = .5.

This may be accounted for by the water surrounding the outside of the mouthpiece having to deviate through an angle of 180° in reaching the jet.

Next consider the mouthpiece running full, as in Fig. 47. This case is similar to an external mouthpiece. There will be a vacuum pressure at the vena contracta which will increase the velocity at that section. This will cause an increased discharge as the coefficient of contraction at the outlet is now unity.

Consider the sections *aa* and *bb*. There will be a loss of head due to the enlarging of the section.

Using the same notation as in Art. 44,

$$\begin{aligned}\text{loss of head due to enlargement} &= \frac{(v_c - v)^2}{2g} \\ &= \left(\frac{1}{C_c} - 1\right)^2 \frac{v^2}{2g} \\ &= \frac{v^2}{2g}\end{aligned}$$

as C_c for the jet $= .5$

Applying Bernoulli's equation to the water surface and to the outlet end of the mouthpiece,

$$H_a + H = H_a + \frac{v^2}{2g} + \left(\begin{array}{c} \text{loss due to} \\ \text{enlargement} \end{array}\right)$$

$$\begin{aligned}\text{Or,} \quad H &= \frac{v^2}{2g} + \frac{v^2}{2g} \\ &= 2 \frac{v^2}{2g}\end{aligned}$$

$$\text{Then,} \quad v = \sqrt{gH}$$

$$\begin{aligned}\text{Discharge, when running full} &= av \\ &= a\sqrt{gH}\end{aligned}$$

$$\text{Discharge, when running free} = .5a \sqrt{2gH}$$

Therefore, the discharge is increased by $\frac{1}{.5\sqrt{2}}$ when running full.

$$\text{Coefficient of discharge when running full} = \frac{1}{\sqrt{2}} = .707$$

In practice, the coefficient of discharge is found to be slightly greater than this amount.

The pressure at the vena contracta may be found by applying Bernoulli's equation to sections *cc* and *bb*.

$$H_c + \frac{v_c^2}{2g} = H_a + \frac{v^2}{2g} + \frac{v^2}{2g}$$

$$\text{But,} \quad v_c = 2v$$

Therefore,
$$H_c + \frac{4v^2}{2g} = H_a + \frac{2v^2}{2g}$$

Or,
$$H_c = H_a - H$$

as $H = \frac{v^2}{2g}$

Thus, the pressure at the vena contracta is less than atmospheric by an amount equal to the head of water in the vessel. Assuming separation takes place at a vacuum pressure of 26 ft. of water, the maximum value of H for steady flow is when $H_c = H_a - 26$.

Then,
$$H_a - 26 = H_a - H$$

Or,
$$H = 26 \text{ ft. of water.}$$

EXAMPLE.

Calculate the coefficient of discharge from a projecting cylindrical mouthpiece in the side of a water tank assuming that the only loss is that due to the sudden enlargement in the mouthpiece, taking a coefficient of contraction as .64. Compare the discharge through a Borda mouthpiece in the vertical side of a tank filled with water, and the jet running free, with that from a short cylindrical mouthpiece projecting from the vertical side of the tank if both are placed in similar positions, are 2 in. in diameter, and the constant head above the centre of each is 3 ft. Sketch the issuing jets in each case. (London Univ., 1920.)

Applying Bernoulli's equation to water surface and outlet of mouthpiece,

$$H = \frac{v^2}{2g} + \frac{(v_c - v)^2}{2g}$$

But,
$$v_c = \frac{v}{.64}$$

Then,
$$H = \frac{v^2}{2g} + \frac{\left(\frac{v}{.64} - v\right)^2}{2g}$$

$$= \frac{1.316 v^2}{2g}$$

And,
$$v = \sqrt{\frac{2gH}{1.316}}$$

Discharge
$$= av = \frac{a}{\sqrt{1.316}} \sqrt{2gH}$$

$$\text{Theoretical discharge} = a \sqrt{2gH}$$

$$\begin{aligned} \text{Coefficient of discharge} &= \frac{a}{\sqrt{1.316} \sqrt{2gH}} = \frac{1}{\sqrt{1.316}} \\ &= .875 \end{aligned}$$

$$\left. \begin{array}{l} \text{Coefficient of discharge for Borda} \\ \text{mouthpiece running free} \end{array} \right\} = .5$$

$$\begin{aligned} \left. \begin{array}{l} \text{Actual discharge for Borda} \\ \text{mouthpiece} \end{array} \right\} &= .5 a \sqrt{2gH} \\ &= .5 \times \frac{\pi}{4} \times \frac{4}{144} \times \sqrt{64.4 \times 3} \\ &= .1518 \text{ cu. ft. per sec.} \end{aligned}$$

$$\begin{aligned} \left. \begin{array}{l} \text{Actual discharge for cylin-} \\ \text{drical mouthpiece} \end{array} \right\} &= C_d a \sqrt{2gH} \\ &= .875 \times \frac{\pi}{4} \times \frac{4}{144} \times \sqrt{64.4 \times 3} \\ &= .268 \text{ cu. ft. per sec.} \end{aligned}$$

EXAMPLES 4.

(1) The discharge through a sharp-edged circular orifice, 1 in. diameter, under a constant head of 4 ft. is 3.24 cu. ft. per min. Find the coefficient of discharge.

$$\text{Ans.—} C_d = .615.$$

(2) If the jet in Question 1, when measured with a screw gauge, is found to have a diameter of .785 in., find the coefficient of velocity.

$$\text{Ans.—} C_v = .992.$$

(3) A jet of water issues from a sharp-edged vertical orifice under a constant head of 4 in. At a certain point of the issuing jet, the horizontal and vertical co-ordinates from the vena contracta are measured and found to be 16 in. and 16.8 in. respectively. Find the coefficient of velocity of the jet.

$$\text{Ans.—} C_v = .978.$$

(4) Find the discharge through a large rectangular vertical orifice, 6 ft. wide and 4 ft. deep, when the water level is 10 ft. above the top edge of the orifice. $C_d = .61$.

$$\text{Ans.—} 403 \text{ cu. ft. per sec.}$$

(5) Water flows from a tank at the rate of 400 gallons per minute into a horizontal pipe of 6 in. diameter. The pipe suddenly changes to 8 in. diameter at a short distance from the tank and is then suddenly reduced back to 6 in. diameter. Find the loss of head at entrance to pipe, at enlargement, and at contraction.

$$\text{Ans.—} 231, .09, .231 \text{ ft. of water.}$$

(6) A large tank has a circular sharp-edged orifice 1.44 sq. in. in area at a depth of 9 ft. below constant water level. The jet issues horizontally, and in a horizontal distance of 7.8 ft. it falls 1.8 ft. The measured discharge is .15 cusecs. Calculate the coefficients of velocity, contraction, and discharge. (A.M.I. Civil E., 1922.)

Ans.—·97; ·643; ·624.

(7) A reservoir is circular in plan, the diameter of the top water level is 300 ft., at a depth of 5 ft. the diameter is 250 ft. The mouth of the outlet pipe, which is 24 in. in diameter, is 12 ft. below top water level; how long will it take to lower the depth of the water in the reservoir 5 ft. ? (Take $C = .8$.) (London Univ., 1917.)

Ans.—79.4 min.

(8) A tank 20 ft. long and 5 ft. wide is divided into two parts, by a partition, so that one part is four times the other part. The water level in the large portion is 10 ft. higher than that in the smaller. Find the time for the difference of water level in the two portions to reach 4 ft. if the water flows through an orifice in the partition 3 in. square. $C_d = .6$.

Ans.—2.055 min.

(9) A pipe 10 in. diameter has a diaphragm fitted in it, in which there is a hole 4 in. diameter concentric with the pipe. Investigate a formula for the loss of head at the diaphragm and show how the arrangement can be used to measure the flow along the pipe.

Show also how you would check experimentally the assumptions made. (London Univ., 1920.)

(10) Establish Bernoulli's equation for the stream line motion of a fluid. Show that when water is issuing steadily from a re-entrant orifice in the bottom of a tank, the area of the jet at the vena contracta is $\frac{1}{2}$ of the area of the orifice. (London Univ., 1915.)

(11) Water in a tank discharges through an external divergent mouthpiece. If the outlet area of the mouthpiece is four times the minimum area, find the maximum head in the tank at which steady flow through the mouthpiece can be obtained. Assume separation takes place at an absolute pressure of 8 ft. of water.

Ans.—1.735 ft. of water.

(12) Water under a constant head of 9 ft. discharges through an external cylindrical mouthpiece of 2 in. diameter. $C_c = .6$.

Find, (1) the discharge in cubic feet per second; (2) the coefficient of discharge; (3) the absolute pressure at the vena contracta in feet of water.

Ans.—437; ·832; 25.7

(13) If the mouthpiece in Question (12) were a Borda mouthpiece running full, what would be the discharge?

Ans.—372 cu. ft. per sec.

(14) Compensation water is to be discharged by two circular orifices under a constant head of 2 ft. 6 in., measured to the centre of the orifices. What diameter will be required to give 3,000,000 gallons a day? $C_a = .62$; $C_v = .97$. (A.M.I. Civil E., 1921.)

Ans.—8.18 in.

(15) A pipe increases abruptly from diameter d to diameter D . Deduce an expression for the loss of head by shock when the discharge is Q . If $d = 12$ in., $D = 18$ in., and $Q = 5$ cu. ft. per sec., what is the loss of head? (A.M.I. Civil E., 1921.)

Ans.—196 ft.

HYDRAULICS

(16) Deduce an expression for the loss of head at a sudden enlargement in a pipe line. Using your result, determine the loss of head when a 12-in. pipe line discharges directly through the side of a reservoir, the velocity of flow being 10 ft. per sec. (A.M.I. Mech. E., 1926.) (Assume $C_c = .6$.)

Ans.—·692 ft. of water.

(17) Two vertical sided basins, each having a surface area of 2,000 sq. ft., are connected by a sluice gate of area 2 sq. ft. The initial difference of level in the basins is 9 ft. How long will it take to reduce this to 4 ft.? The coefficient of discharge of the orifice is .8. (A.M.Inst. C.E., 1926.)

Ans.—4 mins. 8 secs.

CHAPTER V

NOTCHES AND WEIRS

46. Notches and Weirs. A notch may be regarded as an orifice with the water surface below its upper edge. Notches are used for measuring the flow of water from a vessel or reservoir and are generally rectangular or triangular in shape.

A weir is the name given to a dam over which water is flowing. Theoretically, there is no difference between a simple rectangular weir and a rectangular notch, except the latter may have sharp edges.*

The sheet of water flowing through a notch or over a weir is known as the nappe or vein. The top of the weir over which the water flows is known as the sill or crest. Large weirs are sometimes divided into sections by vertical posts.

Shallow rivers are often made navigable by building dams across the river at certain sections over which the water may flow. This has the effect of deepening the river on the upstream side of the dam by an amount equal to the height of the dam above the original water level. During a drought, little or no water will flow past the dam ; but after heavy rains the water flows over the dam, thus converting it into a weir. It is necessary to make short canals, containing locks, around these dams in order that the shipping may pass.

47. Rectangular Notch. If water flows from a tank or reservoir over a notch there will be a contraction of the vein and a slight frictional resistance at the sides, as in the case of an orifice. This will cause the actual discharge to be less than the theoretical discharge ; the ratio between them will be the coefficient of discharge for the notch. An average value of this coefficient is about .62.

Consider the rectangular notch in Fig. 48.

Let L = breadth of notch

H = height of water surface above sill

C_d = coefficient of discharge

Consider a horizontal strip of the water of thickness dh and of depth h . The theoretical velocity of the water flowing through strip will be $\sqrt{2g h}$.

* The term "weir" is sometimes loosely applied to small notches.

$$\text{Discharge through strip} = L dh \sqrt{2g h}$$

$$\begin{aligned} \text{Total discharge} &= L \sqrt{2g} C_d \int_0^H h^{\frac{3}{2}} dh \\ &= \frac{2}{3} L \sqrt{2g} C_d \left[h^{\frac{3}{2}} \right]_0^H \\ &= \frac{2}{3} C_d \sqrt{2g} L H^{\frac{3}{2}} \quad . \quad . \quad (1) \end{aligned}$$

This equation is not used for large weirs.




FIG. 48

If a notch of this type is used for measuring a quantity of water flowing, it must be calibrated experimentally. The discharge for any given weir is equal to $k H^{\frac{3}{2}}$ where

$$k = \frac{2}{3} C_d \sqrt{2g} L.$$

Then, by measuring the discharge per second for various heads, the value of k may be obtained by plotting the discharge and $H^{\frac{3}{2}}$. A perfect straight line will not be obtained, as C_d varies slightly with the head. This method of obtaining C_d is demonstrated in Example 2.

An alternative method is to assume $Q = k H^n$; then taking logs of both sides of this equation,

$$\log Q = \log k + n \log H \quad . \quad . \quad (2)$$

which is a straight line law.

By plotting from experimental results $\log H$ as base and $\log Q$ as vertical ordinate, a straight line is obtained from which k and n can be found. For,

when $H = 1$, $\log H = 0$; then $\log k = \log Q$, hence k .

Also, by choosing any convenient point on the graph,

$$n = \frac{\log Q - \log k}{\log H} \quad (\text{From Eq. (2)})$$

This method is demonstrated in Example 1.

EXAMPLE 1.

The following observations were made during measurements on a weir, whose crest "b" is 3 ft. long.

Head "H" ft. .	.2	.4	.6	.8	1.0	1.2	1.5
Q in. ft. per sec. .	.846	2.34	4.24	6.48	9.00	11.78	16.35

If the discharge is given by $Q = KbH^n$, determine K and n . (A.M.I.Mech. E, 1925.)

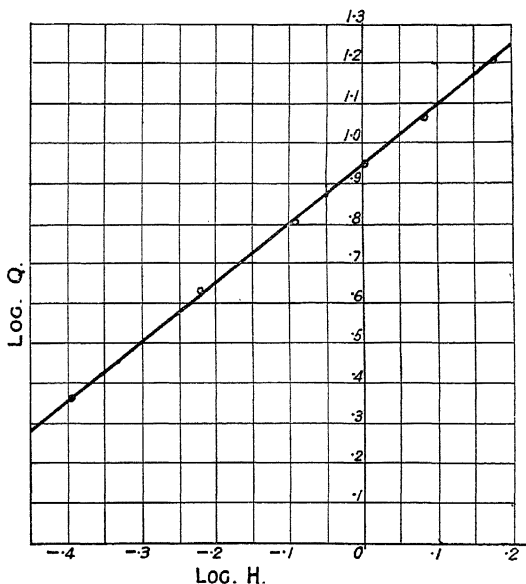


FIG. 48A

First plot $\log H$ and $\log Q$ and draw a straight line a mean through the points, as shown in Fig. 48A.

$$\text{Let } k = Kb$$

When $H = 1$, $\log H = 0$; then.

$$\begin{aligned}\log k &= \log Q \\ &= .955\end{aligned}$$

From which, $k = 9$

Then, $K = k \div b$
 $= 9 \div 3 = 3$

Also, $n = \frac{\log Q - \log \kappa}{\log H}$

Using the values for the point at which $\log H = \cdot 1$,

$$n = \frac{1 \cdot 105 - \cdot 955}{\cdot 1}$$

$$= 1 \cdot 5$$

Hence, equation is

$$Q = 3b H^{\frac{5}{2}}$$

EXAMPLE 2.

In order to find the coefficient of discharge for a small rectangular notch, the discharge was measured experimentally for different heads for a rectangular notch 6 in. wide. The following results were obtained—

Head in feet . . .	·0651	·0716	·0775	·0827	·0870
Discharge in cubic feet per second . . .	·02813	·03180	·03535	·03872	·0419

Find the average value of C_d for the notch.

$$\text{Discharge} = Q = \frac{2}{3} C_d \sqrt{2g} L H^{\frac{3}{2}}$$

$$= k H^{\frac{3}{2}}$$

The value of the constant k may be found by plotting Q and $H^{\frac{3}{2}}$, thus obtaining a straight line. This is done in Fig. 49; a straight line is drawn a mean through the points and passing through the origin.

Taking the values of Q and $H^{\frac{3}{2}}$ from a point P on the straight line,

$$k = \frac{Q}{H^{\frac{3}{2}}} = \frac{\cdot 025}{\cdot 015} = 1 \cdot 667$$

$$\text{As } k = \frac{2}{3} C_d \sqrt{2g} L,$$

$$\frac{2}{3} C_d \sqrt{2g} = \frac{k}{L} = \frac{1.667}{.5} = 3.333$$

$$\text{And, } C_d = \frac{3.333}{\frac{2}{3} \sqrt{2g}} = .624$$

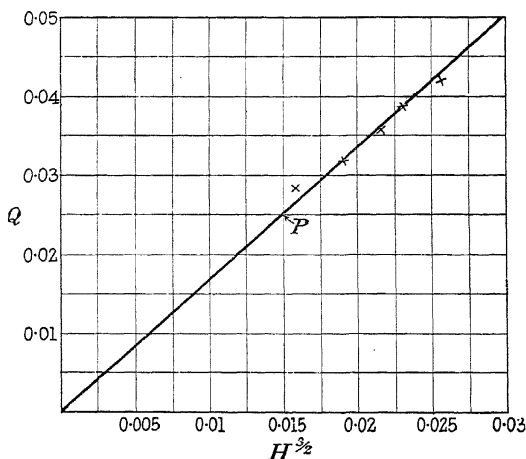


FIG. 49

48. Triangular or V-Notch. In the case of a rectangular notch, it will be noticed that the total wetted edge of the notch does not vary directly with the head, as the length of the base is the same for all heads. Therefore, the coefficient of contraction, which depends on the length of wetted edge, is not a constant for all heads. But in the case of a triangular notch, there is no base to cause contraction, which will be due to the sides only. The coefficient of contraction will, therefore, be a constant for all heads. For this reason, the triangular notch is the most satisfactory type for measuring the quantity of water flowing.

Consider the triangular notch in Fig. 50.

Let H = height of water surface

and θ = angle of notch




FIG. 50

Then, width of notch at water

$$\text{surface} = 2H \tan \frac{\theta}{2}$$

Consider a horizontal strip of the notch of thickness dh and of depth h .

$$\text{Width of strip} = 2(H - h) \tan \frac{\theta}{2}$$

Theoretical velocity of flow through

$$\text{strip} = \sqrt{2g h}$$

$$\text{Discharge through strip} = 2(H - h) \tan \frac{\theta}{2} dh \sqrt{2g h} C_d$$

$$\begin{aligned} \left. \begin{array}{l} \text{Total discharge through} \\ \text{notch} \end{array} \right\} &= 2 C_d \sqrt{2g} \tan \frac{\theta}{2} \int_0^H (H - h) h^{\frac{1}{2}} dh \\ &= 2 C_d \sqrt{2g} \tan \frac{\theta}{2} \left[\frac{2}{3} H h^{\frac{3}{2}} - \frac{2}{5} h^{\frac{5}{2}} \right]_0^H \\ &= \frac{8}{15} C_d \sqrt{2g} \tan \frac{\theta}{2} H^{\frac{5}{2}} \end{aligned}$$

$$\text{Assuming} \quad C_d = .6,$$

$$\text{Discharge} = 2.56 \tan \frac{\theta}{2} H^{\frac{5}{2}} \quad . \quad . \quad (1)$$

$$\text{For a } 90^\circ \text{ notch, } \tan \frac{\theta}{2} = 1$$

$$\text{Then, discharge} = 2.56 H^{\frac{5}{2}} \quad . \quad . \quad . \quad (2)$$

EXAMPLE I.

In order to find the constant for a 90° triangular notch, the discharge through the notch was measured for different heads. The following readings were obtained—

Head in feet	.0407	.0491	.0550	.0692	.0798	.0919	.101
Discharge in cubic feet per second	.00095	.00156	.00207	.00361	.00490	.00702	.00867

Find the constant for the notch and the value of C_d .

As discharge for a 90° notch $= \frac{8}{15} C_d \sqrt{2g} H^{\frac{5}{2}}$,

$$Q = k H^{\frac{5}{2}}$$

where $k = \frac{8}{15} C_d \sqrt{2g}$

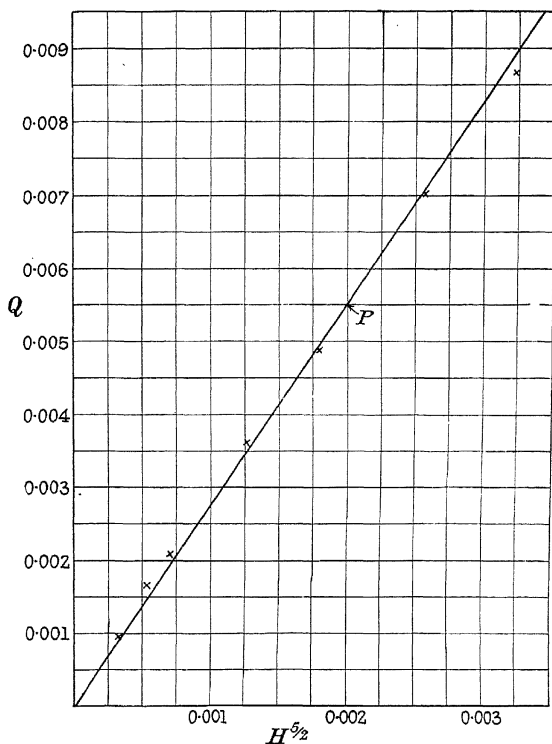


FIG. 51

A straight line should, therefore, be obtained by plotting Q and $H^{\frac{5}{2}}$. This has been done in Fig. 51; it will be noticed that the points lie approximately on a straight line passing through the origin.

From point P on this straight line,

$$k = \frac{Q}{H^{\frac{5}{2}}} = \frac{.0055}{.002} = 2.75$$

Then, $Q = 2.75 H^{\frac{5}{2}}$

As $k = \frac{8}{15} C_d \sqrt{2g}$

$$C_d = \frac{2.75 \times 15}{\sqrt{2g} \times 8} = .642$$

EXAMPLE 2.

A trapezoidal notch has a base L and a head H , the sides make an angle of θ to the vertical. Deduce an expression for the discharge through the notch.

A notch of this type may be divided into a rectangular notch of breadth L , and a triangular notch subtending an angle of 2θ . Then, the total discharge may be found by adding together the discharges from these two.

$$\left. \begin{array}{l} \text{Discharge through} \\ \text{rectangular notch} \end{array} \right\} = \frac{2}{3} C_d \sqrt{2g} L H^{\frac{3}{2}}$$

$$\left. \begin{array}{l} \text{Discharge through} \\ \text{triangular notch} \end{array} \right\} = \frac{8}{15} C_d \sqrt{2g} \tan \theta H^{\frac{5}{2}}$$

$$\begin{aligned} \text{Total discharge} &= \frac{2}{3} C_d \sqrt{2g} L H^{\frac{3}{2}} + \frac{8}{15} C_d \sqrt{2g} \tan \theta H^{\frac{5}{2}} \\ &= C_d \sqrt{2g} H^{\frac{3}{2}} \left(\frac{2}{3} L + \frac{8}{15} \tan \theta H \right) \end{aligned}$$

This may also be obtained from first principles by producing the sloping sides to their point of intersection, and integrating between the limits of the head H .

49. Thomson's Principle of Similarity. Similar weirs or notches may be defined as notches which may be represented by drawings of the same notch but to a different scale. The discharge through similar notches will depend on their linear dimensions raised to power of $\frac{5}{2}$.

Consider two similar triangular notches.

$$\text{Discharge} \propto \text{area} \times \text{velocity}$$

But, $\text{area} \propto H^2$

and $\text{velocity} \propto \sqrt{H}$

$$\begin{aligned} \text{Then, discharge} &\propto H^2 \times \sqrt{H} \\ &= k H^{\frac{5}{2}} \end{aligned}$$

The constant k should be the same for all similar notches.

In the case of similar rectangular notches, let the breadth of the notches be L and nL , and let the corresponding heads be H and nH .

Then,

$$\begin{aligned} \frac{\text{discharge of one weir}}{\text{discharge of other}} &= \frac{(\text{area} \times \text{velocity}) \text{ of one}}{(\text{area} \times \text{velocity}) \text{ of other}} \\ &= \frac{nL \times nH \times \sqrt{nH}}{L \times H \times \sqrt{H}} \\ &= n^{\frac{5}{2}} \end{aligned}$$

50. Francis' Formula for Rectangular Weirs. An empirical formula for the discharge of a rectangular weir is given by Francis as—

$$Q = 3.33(L - .1nH)H^{\frac{3}{2}}$$

cu. ft. per sec.

where L = total breadth of weir in feet

H = head in feet

and n = number of end contractions

For a simple rectangular weir, $n = 2$. For a large weir which is split up into bays by vertical posts, n will depend on the number of bays into which the weir is divided.




FIG. 52

Although Francis deduced this formula experimentally, it can be proved to be quite rational. As the water flows over the weir, the vein is contracted at the sides (Fig. 52) by an amount which is found, experimentally, to average $.1H$ for each side. If there are two contractions, as in the case of Fig. 52, the effective breadth of the weir is $(L - 2H)$. If there were n contractions the effective length would be $(L - .1nH)$.

Substituting the effective length in Equation (1), Art. 47,

$$Q = \frac{2}{3} C_d \sqrt{2g} (L - .1nH)H^{\frac{3}{2}}$$

Assuming $C_d = .623$,

$$Q = 3.33 (L - .1nH)H^{\frac{3}{2}}$$

If the end contractions are suppressed, as in the case of a weir having the same width as the channel by which the water approaches, n will be zero.

$$\text{Then, } Q = 3.33 L H^{\frac{3}{2}}$$

EXAMPLE.

Show that a rational formula for the flow Q over a rectangular weir of width B can be expressed as

$$Q = A(B - CH)H^{\frac{3}{2}}$$

where H is the depth of water at a point near the weir which is not affected by the curvature of the surface.

In a rectangular weir, 5 ft. in breadth, the discharge is 5.91 cu. ft. per sec. when the head of water is .51 ft., and is 14.99 cu. ft. when the head is .96 ft. Find the values of the constants in the above expression, and estimate the discharge when the head is .75 ft. (London Univ., 1913.)

This is Francis' formula. Substituting the values of B and H in the given two cases,

$$5.91 = A(5 - C \cdot 51) \cdot 51^{\frac{3}{2}} \quad . \quad . \quad . \quad (1)$$

$$\text{also, } 14.99 = A(5 - C \cdot 96) \cdot 96^{\frac{3}{2}} \quad . \quad . \quad . \quad (2)$$

$$\text{From (1), } 16.2 = 5A - .51 AC \quad . \quad . \quad . \quad (3)$$

$$\text{From (2), } 16.0 = 5A - .96 AC$$

$$\text{Subtracting, } .2 = .45 AC$$

$$\text{Then, } C = \frac{.2}{.45A}$$

Substituting in (3),

$$16.2 = 5A - .51A \times \frac{.2}{.45.4}$$

$$= 5A - .2265$$

$$A = 3.29$$

$$\text{d, } C = \frac{.2}{.45 \times 3.29} = .135$$

$$\text{Then, } Q = 3.29 (5 - .135 H) H^{\frac{3}{2}}$$

$$\text{When } H = .75 \text{ ft.,}$$

$$\begin{aligned} Q &= 3.29 (5 - .101) \cdot 75^{\frac{3}{2}} \\ &= 10.46 \text{ cu. ft. per sec.} \end{aligned}$$

51. **Bazin's Formula for Rectangular Weirs.** Another type of equation used for obtaining the discharge over a rectangular weir without end contractions is known as Bazin's formula. Using Equation (1), Art. 47,

$$Q = \frac{2}{3} C_d \sqrt{2g} L H^{\frac{3}{2}}$$

$$= m \sqrt{2g} L H^{\frac{3}{2}},$$

where $m = \frac{2}{3} C_d$

The coefficient m was found by Bazin to vary with the head, its value being obtained from the following equation—

$$m = .405 + \frac{.00984}{H}$$

EXAMPLE.

Find the discharge, using Bazin's formula, for a rectangular weir with end contractions suppressed, when the head is 6 in. and the length 4 ft.

As $H = .5$,

$$m = .405 + \frac{.00984}{.5}$$

$$= .42468$$

Discharge $= m \sqrt{2g} L H^{\frac{3}{2}}$

$$= .42468 \times \sqrt{2g} \times 4 \times (.5)^{\frac{3}{2}}$$

$$= .482 \text{ cu. ft. per sec.}$$

52. **Velocity of Approach.** If the area of the channel through which the water approaches the weir is larger than the weir itself, the water will have a velocity on reaching the weir known as the velocity of approach. This velocity may be assumed to be uniform over the whole weir.

Let A = cross-sectional area of channel behind weir

v_1 = velocity of approach

Q = discharge over weir in cu. ft. per sec.

Then, as quantity of water passing over weir per second equals quantity flowing along channel per second,

$$v_1 = \frac{Q}{A}$$

The quantity Q is determined, as a first approximation, from the ordinary weir equation, ignoring the velocity of approach.

Additional head due to velocity of approach $= \frac{v_1^2}{2g}$ and acts over whole of weir.

Consider the horizontal strip of the weir in Fig. 48.

$$\text{Discharge through strip} = C_d \sqrt{2g h} \times L dh$$

$$\begin{aligned} \text{Total discharge} &= C_d \sqrt{2g} L \int_{\frac{v_1^2}{2g}}^{H + \frac{v_1^2}{2g}} h^{\frac{3}{2}} dh \\ &= \frac{2}{3} C_d \sqrt{2g} L \left[h^{\frac{3}{2}} \right]_{\frac{v_1^2}{2g}}^{H + \frac{v_1^2}{2g}} \\ &= \frac{2}{3} C_d \sqrt{2g} L \left[\left(H + \frac{v_1^2}{2g} \right)^{\frac{3}{2}} - \left(\frac{v_1^2}{2g} \right)^{\frac{3}{2}} \right] \end{aligned} \quad (1)$$

As the value of v_1 was obtained only approximately in the first case, it should be corrected to suit the new discharge obtained from Equation (1). Then, by substituting this new value of v_1 in Equation (1), a more accurate value of the actual discharge may be obtained. If the value of v_1 is small, this correction of the first approximation will make very little difference to the discharge obtained from Equation (1).

Francis' formula for velocity of approach becomes—

$$Q = 3.33 (L - 1n H_1) \left\{ H_1^{\frac{3}{2}} - \left(\frac{v_1^2}{2g} \right)^{\frac{3}{2}} \right\}$$

where $H_1 = \frac{v_1^2}{2g} + H$, and is known as the still water head.

From the results of experiments, Bazin found that the discharge could be obtained by increasing the actual measured head, H , by the amount $a \frac{v_1^2}{2g}$, where a is a constant having a mean value of 1.6.

Then, equivalent static head, or still water head

$$\begin{aligned} &= H + \frac{av_1^2}{2g} \\ &= H_1 \end{aligned}$$

Bazin's formula then becomes—

$$Q = m \sqrt{2g} L \left(H + \frac{av_1^2}{2g} \right)^{\frac{3}{2}}$$

where $m = .405 + \frac{.00984}{H_1}$

EXAMPLE.

Find the discharge over a weir 10 ft. long under a measured head of 2 ft., if the channel approaching the weir is 20 ft. wide and 3 ft. deep.

First find the discharge, ignoring velocity of approach.

Using Francis' formula,

$$\begin{aligned} Q &= 3.33(L - .2H)H^{\frac{3}{2}} \\ &= 3.33(10 - .4)2 \\ &= 90.4 \text{ cu. ft. per sec.} \end{aligned}$$

$$v_1 = \frac{Q}{A} = \frac{90.4}{20 \times 3} = 1.51 \text{ ft. per sec.}$$

$$\begin{aligned} \text{Still water head} &= H_1 = H + \frac{v_1^2}{2g} \\ &= 2 + \frac{1.51^2}{2g} \\ &= 2.035 \text{ ft.} \end{aligned}$$

Substituting in Francis' formula for velocity of approach,

$$\begin{aligned} Q &= 3.33(L - .1nH_1) \left\{ H_1^{\frac{3}{2}} - \left(\frac{v_1^2}{2g} \right)^{\frac{3}{2}} \right\} \\ &= 3.33(10 - .407) \left\{ 2.035^{\frac{3}{2}} - \left(\frac{1.51^2}{2g} \right)^{\frac{3}{2}} \right\} \\ &= 93.0 \text{ cu. ft. per sec.} \end{aligned}$$

In this example the value of v_1 is so small that no adjustment is necessary.

53. Time of Emptying Reservoir with Rectangular Weir.

Consider a reservoir of area A sq. ft. in plan from which water is flowing over a rectangular weir of breadth L . It is required to find the time taken for the water level in the reservoir to fall from a height H_1 to a height H_2 above the level of the sill.

Suppose at any instant the height of water level above the sill is h . Then let a small quantity dq flow over the weir in a time dt , and let this cause the water level in reservoir to fall by amount dh .

$$\text{Discharge through weir} = dq = \frac{2}{3} C_d \sqrt{2g} L h^{\frac{3}{2}} dt$$

$$\text{Discharge from reservoir} = dq = A dh$$

$$\text{Then,} \quad \frac{2}{3} C_d \sqrt{2g} L h^{\frac{3}{2}} dt = A dh$$

$$\text{And,} \quad dt = \frac{A dh h^{-\frac{3}{2}}}{\frac{2}{3} C_d \sqrt{2g} L}$$

$$\begin{aligned} \text{Total time} \quad &= t = \frac{A}{\frac{2}{3} C_d \sqrt{2g} L} \int_{H_2}^{H_1} h^{-\frac{3}{2}} dh \\ &= -\frac{2A}{\frac{2}{3} C_d \sqrt{2g} L} \left[h^{-\frac{1}{2}} \right]_{H_2}^{H_1} \\ &= \frac{2A}{\frac{2}{3} C_d \sqrt{2g} L} \left(\frac{1}{H_2^{\frac{1}{2}}} - \frac{1}{H_1^{\frac{1}{2}}} \right) \end{aligned}$$

If Bazin's coefficient is used, this equation becomes

$$t = \frac{2A}{m \sqrt{2g} L} \left(\frac{1}{H_2^{\frac{1}{2}}} - \frac{1}{H_1^{\frac{1}{2}}} \right)$$

Using Francis' formula the equation becomes

$$t = \frac{2A}{3.33(L - 1nH)} \left(\frac{1}{H_2^{\frac{1}{2}}} - \frac{1}{H_1^{\frac{1}{2}}} \right)$$

the value of H being taken as a mean of H_1 and H_2 .

EXAMPLE.

Show that the discharge over a sharp-edged V notch is theoretically proportional to the head raised to an index power of 2.5.

A sharp-edged V notch inserted in the side of a rectangular tank, 12 ft. long and 4 ft. broad, gives a calibration $Q = 2.64H^{2.5}$ where Q is measured in cubic feet per second and H is measured in feet. Find how long it will take to reduce the head in the tank from 12 in. to 1 in. if the water discharges freely over the notch and there is no inflow into the tank. (London Univ., 1921.)

Consider the water level at any instant to be h ft. above bottom of notch. Let small quantity dq flow through in time dt , thereby reducing water level by dh .

$$\text{Then,} \quad dq = 2.64 h^{2.5} dt$$

$$\text{Also,} \quad dq = A dh$$

$$\text{Therefore, } 2.64 h^{2.5} dt = A dh$$

$$\text{Or,} \quad dt = \frac{A dh}{2.64 h^{2.5}}$$

$$\begin{aligned} \text{Total time} &= t = \frac{A}{2.64} \int_{1\frac{1}{2}} h^{-2.5} dh \\ &= -\frac{2}{3} \times \frac{A}{2.64} \left[h^{-1.5} \right]_{1\frac{1}{2}}^1 \\ &= -\frac{2}{3} \times \frac{A}{2.64} \left(\frac{1}{(1)^{\frac{3}{2}}} - \frac{1}{(\frac{1}{12})^{\frac{3}{2}}} \right) \\ &= \frac{2}{3} \times \frac{4 \times 12}{2.64} \left(\frac{1}{.0241} - 1 \right) \text{ secs.} \\ &= 8.2 \text{ mins.} \end{aligned}$$

EXAMPLES 5.

(1) Find the discharge through a rectangular weir, 8 ft. wide, under a head of 8 in., when the side contractions are suppressed—

1. By Bazin's formula. *Ans.*—14.7 cu. ft. per sec.

2. By Francis' formula. *Ans.*—14.5 cu. ft. per sec.

(2) A rectangular weir is 6 ft. broad and has a head of 2 ft. 3 in. Find the discharge taking into account the two end contractions.

Ans.—62.2 cu. ft. per sec.

(3) A rectangular weir, 20 ft. long, is divided into three bays by two vertical posts, each 1 ft. wide. Find the discharge when the head is 1 ft. 6 in.

Ans.—104.7 cu. ft. per sec.

(4) Find the discharge through a triangular notch under a constant head of 10 in. if the angle of the notch is 120° . $C_d = .62$. *Ans.*—2.94 cu. ft.

(5) A stream approaching a waterfall having a fall of 60 ft., is gauged by a weir. The measured head over the weir is 11 in. and the length of the weir is 10 ft. The velocity of approach u is 4 ft. per sec., and, due to this, the head may be supposed to be increased by $\frac{1.5 u^2}{2g}$. Determine the power available from the fall, assuming that 50 per cent of the energy can be used. (London Univ., 1916.) *Ans.*—165.2 h.p.

(6) Obtain a formula for the discharge over a rectangular weir, taking into account the effect of lateral contractions.

Determine the discharge over a sharp crested weir, 15 ft. long, with no lateral contractions, the measured head over the crest being 17.9 in. The width of the channel of approach is 25 ft., and its depth below the crest of the weir is 3 ft. (London Univ., 1921.) *Ans.*—93 cu. ft. per sec.

(7) During a test in a laboratory, the water which has passed through a Venturi meter flows over a right-angled V notch, the head at the notch being registered. The larger diameter of the Venturi meter is 10 in., and the diameter of the throat is 4 in. When a steady head over the V notch of .604 ft. is maintained, the difference of pressure head at the Venturi meter is found to be 1.075 ft. of water. Determine the coefficient of this Venturi meter on the assumption that the V notch results are correct, the coefficient being .60. (London Univ., 1915.) *Ans.*— $k = .99$.

(8) A reservoir has an area of 100,000 sq. yd. and is provided with a weir 15 ft. long; find how long it will take for the level at the sill to fall from 2 ft. to 1 ft.

Deduce the formula you use and note any assumptions made. (London Univ., 1912.) *Ans.*—179.5 min.

(9) State the principle of similarity and show how it can be used to prove that the discharge from a triangular notch is

$$Q = CH^{\frac{5}{2}}$$

The compensation water from a waterworks of 12,000,000 gallons per day is discharged over a rectangular weir. Find the length of the weir if the head is not to be more than 15 in. (London Univ., 1914.) *Ans.*—5.05 ft.

(10) Explain why a sharp-edged V notch gives a coefficient of discharge which is practically independent of the head. (London Univ., 1913.)

(11) Deduce an expression for the discharge over a triangular notch. What does this become if the angle of the notch is 90° ? (A.M.I. Mech. E., 1922.)

(12) Find the depth and top width of a triangular notch capable of discharging a maximum quantity of 25 cusecs and such that the head shall be 3 in. when the discharge is .2 cusecs. For a right-angled notch, $c = 2.54$. (A.M.I. Civil E., 1922.) *Ans.*—1.725 ft. 8.7 ft.

(13) The following observations were made during measurements on a weir, whose crest " b " is 3 ft. long.

Head " H " ft. .	0.2	0.4	0.6	0.8	1.0	1.2	1.5
Q cub. ft. per sec.	0.846	2.34	4.24	6.48	9.00	11.78	16.35

If the discharge is given by $Q = K b H^n$, determine K and n . (A.M.I. Mech.E., 1925.)

Ans.— $K = 3.01$; $n = 1.49$

(14) Deduce an expression for the discharge over a right-angled triangular notch. If the coefficient of discharge is 0.61, what will be the discharge under a head of 12 in. ? (A.M.I. Mech. E., 1925.)

Ans.—2.6 cu. ft. per sec.

(15) Deduce an expression for the discharge over a right-angled triangular notch. If the coefficient of discharge is 0.61, what will be the discharge if the head is 18 in. ? (A.M.Inst. C.E., 1925.)

Ans.—7.16 cu. ft. per sec.

CHAPTER VI

FRICITION AND FLOW THROUGH PIPES

54. Fluid Friction. Fluids in motion are subjected to certain resistances which are assumed to be due to friction. For convenience, they will be known, in what follows, as frictional resistances. Actually, these resistances are mainly due to viscosity; that is, to the resistance to sliding between two adjacent layers of the fluid.

Viscous resistance is a shear resistance and is probably due to overcoming the tension between the particles on a plane inclined to the plane of shear. The resistance would then be equal to the components of this tension, in the plane of shear. It has been suggested that the resistance of a fluid to tension is due to molecular attraction; in which case, the apparent frictional resistance of a fluid is primarily due to this cause.

It is found that the motion of a liquid is a steady stream line flow for low velocities only. After a certain velocity is reached the motion is no longer steady and eddy currents appear. The velocity at which the flow changes from steady flow to eddy flow is known as the critical velocity.

For liquids moving with a steady stream line motion, that is, before the critical velocity is reached, the frictional resistance obeys certain laws; this is known as a stream line flow. But once the critical velocity is passed, there is a distinct change in many of these laws.

For steady stream line flow the frictional resistance is—

- (1) Proportional to the velocity.
- (2) Independent of the pressure.
- (3) Proportional to the area of surface in contact.
- (4) Independent of nature of surface in contact.
- (5) Varies greatly with the temperature.

On account of (4), it is inferred that when a liquid is flowing past a surface with a velocity less than the critical velocity, a film of stationary liquid is formed over the surface; the resistance is then due to viscosity only.

For unsteady flow beyond the critical velocity, the frictional resistance is—

- (1) Proportional to the square of velocity.
- (2) Independent of pressure.
- (3) Proportional to density of fluid.
- (4) Varies only slightly with the temperature.
- (5) Proportional to area of surface in contact.
- (6) Depends on nature of surface in contact.

This type of flow is known as a turbulent flow.

55. Froude's Experiments. The frictional resistances of surfaces moving in water were investigated by Froude.* An experimental tank, about 300 ft. long, containing water was used. Thin wooden boards were towed endwise in this tank by connecting them to a carriage running on rails at the side. The carriage was hauled along at various speeds by means of a wire rope passing around a drum, the force required to tow the boards being measured. Boards of lengths varying from 2 ft. to 50 ft. were used, their surfaces being covered with varnish, tinfoil, calico, and sand, in turn.

From the results of these experiments Froude concluded—

(1) The frictional resistance varies approximately with the square of the velocity.†

(2) The frictional resistance varies with the nature of the surface.

(3) The frictional resistance per square foot of surface decreases as the length of the board increases, but is constant for long lengths.

The explanation of this last conclusion is that the relative velocity between the water and the board is greater at the front edge. The water is at rest when cut by the front edge, but is dragged along with the board once the front edge is passed. This causes the mean relative velocity to be greater with a short board than with a long one. For this reason, the frictional resistance per square foot may be taken as constant.

Let f' = frictional resistance per sq. ft. of a given surface
at unit velocity†

A = area of wetted surface in sq. ft.

V = velocity of surface in ft. per sec.

* *British Association Reports*, 1872-1874.

† Actually f' will vary with the temperature, the velocity, and the length, as shown in Chapter XII.

Then, total frictional resistance $= f' A V^n$

Assuming the index $n = 2$,

$$\text{total frictional resistance} = f' A V^2. \quad (1)$$

56. Resistance of Ships. The resistance of a ship to motion is due to the frictional resistance of its wetted surface and to head resistance. The latter will depend on the shape of ship and can be reduced by making the immersed portion of the ship a stream line form. The energy utilized in overcoming the head resistance is wasted in the formation of waves, known as the wash, and is eventually lost in friction. The best stream line form for a ship will depend on the speed and on the density of the fluid in which the ship is immersed. The stern should be more tapered than the bow, fast ships should be more tapered than slow ones, whilst an airship, which travels in a much lighter fluid, need not be tapered as much as a sea-going vessel of the same speed. The best form of ship can only be determined by experiment, and it is usual, before building a ship, to make a small model of the same proportions and to measure its resistance in an experimental tank. By so doing, the head or wave resistance of the proposed ship may be calculated from that of the model.*

Total resistance of ship = frictional resistance + wave resistance.

Let R_f = frictional resistance of ship

R_w = wave resistance of ship

and R = total resistance of ship

Then, $R = R_f + R_w$

Let f_s = frictional resistance per sq. ft. of ship at unit velocity

A_s = area of wetted surface of ship

and V_s = speed of ship

From Equation (1), Art. 55,

$$R_f = f_s A_s V_s^2$$

then $R_w = R - f_s A_s V_s^2$

It is known from experiments with ships that the wave resistance of a ship is in proportion to the square of the speed and to the area of transverse section, and may be calculated from the wave resistance of the model.†

* For a fuller account of the resistance of ships see Sir William White's *Naval Architecture*.

† See also Art. 127.

Let f_m = frictional resistance per sq. ft. of model at unit velocity

A_m = area of wetted surface of model

V_m = speed of model

r = total resistance of model

r_f = frictional resistance of model

r_w = wave resistance of model

$$\begin{aligned}\text{Then, } r_w &= r - r_f \\ &= r - f_m A_m V_m^2\end{aligned}$$

The model is made the same form as the ship and, therefore, represents the ship to a given scale. Let n be the ratio between the linear dimensions of the ship and model.

$$\text{Then, } A_s = n^2 A_m$$

The speed of the model should be $\frac{1}{\sqrt{n}} V_s$, in order to compare with that of the ship. This is known as the corresponding speed.*

$$\text{Or, } V_s = \sqrt{n} V_m$$

As the wave resistance is in proportion to the area and to the velocity squared,

$$\begin{aligned}\frac{R - R_f}{r - r_f} &= \left(\frac{V_s}{V_m} \right)^2 \frac{A_s}{A_m} = \frac{n V_m^2 n^2 A_m}{V_m^2 A_m} \\ &= n^3 \quad \dots \quad (1)\end{aligned}$$

$$\begin{aligned}\text{But, } \frac{R_f}{r_f} &= \frac{f_s A_s V_s^2}{f_m A_m V_m^2} = \frac{f_s n^2 A_m n V_m^2}{f_m A_m V_m^2} \\ &= \frac{f_s}{f_m} n^3\end{aligned}$$

Substituting in Equation (1),

$$R - r_f \frac{f_s}{f_m} n^3 = n^3 (r - r_f)$$

$$\text{Then, } R = n^3 \left\{ r + r_f \left(\frac{f_s}{f_m} - 1 \right) \right\} \quad \dots \quad (2)$$

If the surface of the model is the same as that of the ship, $f_s = f_m$. Equation (2) then becomes

$$R = n^3 r$$

* For explanation of this see Art. 127

With ships of similar form and of the same surface, and using notation of Art. 55,

$$\begin{aligned}\text{total resistance} &= \text{frictional resistance} + \text{wave resistance} \\ &= f' L^2 V^2 + c L^2 V^2\end{aligned}$$

where c is a coefficient depending on the form and L is the linear dimension.

$$\text{Then, total resistance} = (f' + c) L^2 V^2$$

$$\text{Horse-power} = \frac{\text{resistance} \times V}{550}$$

where resistance is in pounds and velocity in feet per second.

$$\begin{aligned}\text{Then, horse-power} &= \frac{(f' + c)}{550} L^2 V^3 \\ &= k L^2 V^3\end{aligned}$$

where k is a constant for the type of ship considered.

The same laws will hold for any other fluid; this will be seen from the curve in Fig. 53. This curve was plotted from the maximum speed and maximum horse-power of nine rigid air-ships, covered with the same material and of almost similar form. There was a considerable variation in their sizes. As the horse-power equals $k L^2 V^3$, a straight line passing through the origin should be obtained if the horse-power is plotted against $L^2 V^3$. The slope of this line gives the constant k . This has been done in Fig. 53; it will be noticed that the points lie approximately on a straight line, thus proving the above laws to hold.

EXAMPLE.

Show how the total resistance and the power required for propulsion of a ship can be deduced from experiments on a scale model. Determine the indicated horse-power to drive a ship 300 ft. long, having 13,500 sq. ft. wetted surface, at 20 knots, if the resistance of the model, one-sixteenth the size of the ship, is 20 lb. at the corresponding speed. Take f for the ship as .0091, and for the model .0094, and assume that 60 per cent of the I.h.p. is available for propulsion. [1 knot = 1.69 ft. per sec.] (London Univ., 1919.)

$$\text{Area of wetted surface of model} = A_m = \frac{A_s}{n^2} = \frac{13,500}{(16)^2}$$

$$\text{Corresponding speed of model} = \frac{V_s}{\sqrt{n}} = \frac{20}{4} \text{ knots}$$

Assuming the units of f' are in pounds per square foot per second,

$$\begin{aligned}\text{Frictional resistance of model} &= r_f = f_m A_m V_m^2 \\ &= .0094 \times \frac{13,500}{256} \times \left(\frac{20 \times 1.69}{4} \right)^2 \\ &= 35.4 \text{ lb.}\end{aligned}$$

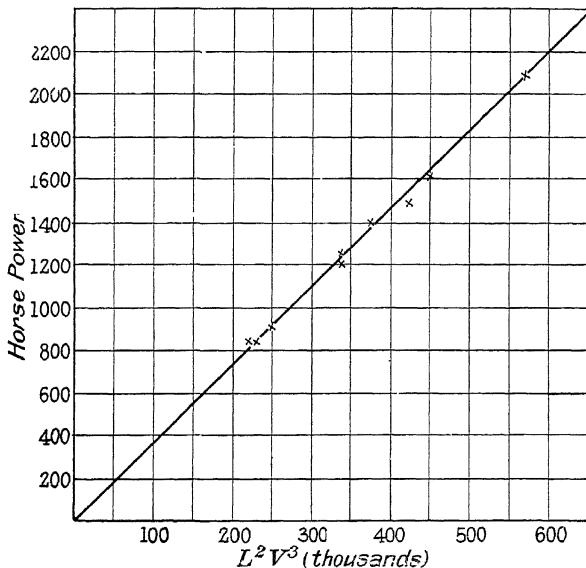


FIG. 53

Assuming the given resistance of model means the wave resistance, and using Equation (2),

$$r = 20 + 35.4 = 55.4 \text{ lb.}$$

$$\begin{aligned}\text{Total resistance of ship} &= n^3 \left\{ r + r_f \left(\frac{f_s}{f_m} - 1 \right) \right\} \\ &= 16^3 \left\{ 55.4 + 35.4 \left(\frac{.0091}{.0094} - 1 \right) \right\} \\ &= 222,500 \text{ lb.}\end{aligned}$$

$$\begin{aligned}
 \text{Horse-power} &= \frac{RV}{550} \times \frac{100}{60} \\
 &= \frac{222,500 \times 20 \times 1.69 \times 100}{550 \times 60} \\
 &= 22,800
 \end{aligned}$$

57. Friction of Revolving Disc. Froude's experiments gave the true coefficient of friction only when very long boards were used. Professor Unwin overcame this difficulty by revolving a disc at a known speed in the liquid and obtained the coefficient of friction of the disc's surface by measuring the work done.

Consider the disc in Fig. 54.

Let ω = angular velocity of disc in radians per second

r = radius of disc

and μ = coefficient of friction at unit velocity*




FIG. 54

Then, frictional force = $\mu \times \text{area} \times (\text{velocity})^2$

Consider a thin ring of the disc of a radius x and let thickness of ring be dx .

$$\text{Area of ring (both sides)} = 4\pi x dx$$

$$\text{Tangential velocity of ring} = \omega x$$

$$\text{Frictional resistance of ring} = \mu \times 4\pi x dx \times \omega^2 x^2$$

$$\left. \begin{array}{l} \text{Moment of resistance about} \\ \text{centre} \end{array} \right\} = 4\pi \mu \omega^2 x^3 dx \times x$$

$$\begin{aligned}
 \text{Total moment of disc} &= 4\pi \mu \omega^2 \int_0^r x^4 dx \\
 &= \frac{\pi}{5} \mu \omega^2 r^5
 \end{aligned}$$

$$\begin{aligned}
 \text{Work done per second} &= \text{Moment} \times \text{angle turned through} \\
 &= \frac{4}{5} \pi \mu \omega^3 r^5
 \end{aligned}$$

* Actually μ will vary with the temperature and velocity; see Chapter XII on Viscous Flow

If the frictional resistance is assumed to vary with (velocity)^{*n*}, this expression becomes

$$\text{Work done per second} = \frac{4\pi \mu \omega^{n+1} r^{n+3}}{n+3}$$

58. Friction in Pipes—Hydraulic Gradient. Fluids flowing through pipes are subjected to a frictional resistance depending on the velocity, the area of the wetted surface, and the nature of the surface. In long pipes the frictional resistance is so large that all other resistances are rendered insignificant in comparison, and the total energy of the fluid is absorbed in overcoming it. The energy lost in overcoming the frictional resistance is expressed in feet of water and is known as the head lost in friction.

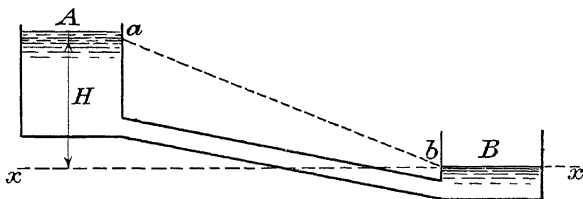


FIG. 55

Consider water to flow through a long pipe from a reservoir *A* into a reservoir *B* (Fig. 55). Take the line *xx* through the water level in *B* as the datum line. Let *H* be the height of water in *A* above datum, and let *l* be the length of the pipe. If *p* is the intensity of pressure of the water at any section of the pipe, the pressure energy at that section will be $\frac{p}{w}$.

Supposing the pressure energy of the water at all sections of the pipe are plotted as vertical ordinates, using the centre line of the pipe as a base line, a straight sloping line *ab* will be obtained. This line falls off uniformly from *A*, as there is a uniform loss of head due to friction as the water flows along the pipe. This line is called the hydraulic gradient, and its slope is equal to the total loss of head divided by length of pipe.

In practice the slope is small, so that either the sine or the tangent may be used as the slope of the hydraulic gradient.

Let i = slope of pressure energy line ab

and h = total head lost

Then, slope of hydraulic gradient $= i = \frac{h}{l}$ and is known as the vertical slope

It will be noticed that if the pipe is uniform and if the whole of the available head is lost in friction, the slope of the hydraulic gradient will be the difference of level of water surfaces divided by length of pipe.

Next consider the pipe line shown in Fig. 55A. A and B are two reservoirs separated by a hill; a uniform pipe is laid over the

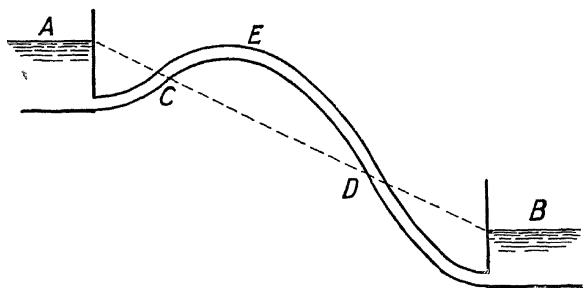


FIG. 55A

hill so that water from A may flow into B . Fig. 55A is drawn to greatly enlarged vertical scale; actually, the length of the pipe may be taken as the length of its horizontal projection. As the pipe is long, the loss of head due to friction will be very large and all other losses may be neglected; hence, taking the water level at B as datum, the water will lose energy at a uniform rate from the water level in A to the water level in B . From this it follows that the hydraulic gradient will be a straight line joining the water surface in A and B .

The pressure energy at any section of the pipe will be represented by the vertical distance between the hydraulic gradient and the pipe centre line at that section. If the hydraulic gradient is above the centre line of pipe the pressure is above atmospheric; if below the centre line of pipe the pressure is below atmospheric.

It will be seen from 55A that at *C* and *D* the water pressure is atmospheric, whilst between *C* and *D* it is less than atmospheric. The highest point of the pipe above the hydraulic gradient is *E*; at this point the water pressure is least. If the absolute pressure at *E* is less than 8 ft. of water, or 26 ft. vacuum, separation will occur, for at this pressure the water commences to vaporize, large bubbles of gas will occur causing the flow to cease. It follows from this that engineers must lay their pipe lines so that no section of the pipe will

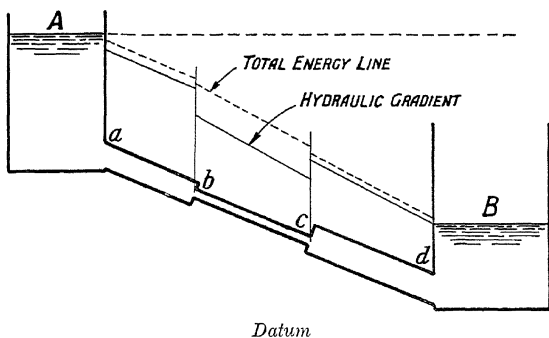


FIG. 56

be more than 26 ft. above the hydraulic gradient at that section.

A pipe which rises above its hydraulic gradient is known as a syphon. It will be noticed from Fig. 55A that a pipe may be above the hydraulic gradient and yet be below the water surface at *A*; such a pipe would still be a syphon.

Consider next the short pipe line shown in Fig. 56. Let the water flow from *A* to *B* along a pipe of varying section *a b c d*. At any section of the pipe the total energy of the water will be the datum head + the velocity head + the pressure head. Choose any horizontal line as the datum line, and starting from the water level in *A*, mark off the losses of head in the pipe from all sources, to the same vertical scale as the figure. The line thus obtained is the total energy line, and is shown dotted. The height of this line above the datum line, at any section, will give the total energy of the water at that section.

Let v_1 = velocity of flow in $a b$

v_2 = velocity of flow in $b c$

v_3 = velocity of flow in $c d$.

The following are the losses to be taken into account—

At a , a loss due to entrance to pipe $= .5 \frac{v_1^2}{2g}$.

Between a and b a uniform loss due to friction

$$= \frac{4 f l v_1^2}{2g d} \quad (\text{Art. 59})$$

At b , a loss due to sudden contraction $= .5 \frac{v_2^2}{2g}$

Between b and c , a uniform loss due to friction.

At c , a loss due to sudden enlargement $= \frac{(v_2 - v_3)^2}{2g}$

Between c and d , a uniform loss due to friction.

At d , a loss due to velocity head being destroyed $= \frac{v_3^2}{2g}$

The sum of all these losses will equal the difference of level between the water surfaces in A and B .

As the height of the hydraulic gradient above the centre line of pipe represents the pressure head of the water, it follows that if the velocity head is deducted from the total energy line the hydraulic gradient will be obtained. For,

$$\left. \begin{array}{l} \text{pressure head above} \\ \text{centre line of pipe} \end{array} \right\} = \begin{array}{l} \text{total energy above datum} - \\ \text{velocity head.} \end{array}$$

$$\text{Velocity head between } a \text{ and } b = \frac{v_1^2}{2g}$$

$$\text{Velocity head between } b \text{ and } c = \frac{v_2^2}{2g}$$

$$\text{Velocity head between } c \text{ and } d = \frac{v_3^2}{2g}$$

These amounts have been subtracted from the total energy line of Fig. 56 and the full line representing the hydraulic gradient is obtained.

It will be noticed that if the diameter of the pipe bc is much smaller than that of cd , the velocity v_2 will be large compared with v_3 ; hence the hydraulic gradient of the pipe cd may be higher than that of bc .

59. Loss of Head Due to Friction in Pipes. A rational formula for the loss of head in a pipe due to friction may be obtained by assuming the experimental results of fluid friction to hold.

Consider water flowing along a uniform horizontal pipe, of cross-sectional area A , with a velocity v . Let l be the length of the pipe and let the intensity of pressure be reduced by the frictional resistance from p_1 to p_2 over the length l .

Let $f' =$ frictional resistance per unit area at unit velocity

$P =$ wetted perimeter of pipe

Resolving horizontally,

$$p_1 A = p_2 A + \text{frictional resistance}$$

But, frictional resistance $= f' \times \text{area} \times v^n$

$$= f' P l v^n$$

Therefore, $(p_1 - p_2) A = f' P l v^n$

Dividing through by the density of water w ,

$$\frac{p_1}{w} - \frac{p_2}{w} = f' \frac{P l v^n}{A w}$$

Let $h_f =$ head lost due to friction

$$= \frac{p_1}{w} - \frac{p_2}{w}$$

Then, $h_f = f' \frac{P l v^n}{A w}$

The ratio $\frac{A}{P}$ is called the hydraulic mean depth and is represented by m .

Then, $h_f = \frac{f' l v^n}{m w}$ (1)

In using Equation (3), care should be taken that all the dimensions are in feet and seconds units.

Although Equation (3) is used by all engineers for calculations on pipe flow, the results obtained can only be very approximate. As f varies greatly with the temperature it follows that there will be a large variation in the flow during the year, a greater flow being obtained in summer.*

EXAMPLE.

Water flows through a pipe, 8 in. diameter, 150 ft. long, with a velocity of 8 ft. per sec. Find the head lost in friction—(a) using the formula

$$h_f = \frac{4 f l v^2}{d 2g}$$

assuming f to be .0056; (b) using the formula $v = C \sqrt{mi}$, assuming $C = 106$.

$$(a) \quad h_f = \frac{4 \times .0056 \times 150 \times 8^2}{\frac{8}{12} \times 64.4}$$

$$= 5.0 \text{ ft. of water.}$$

$$(b) \quad m = \frac{d}{4} \text{ for a circular pipe running full}$$

$$i = \frac{h_f}{l}$$

$$\text{Then, } v = 106 \sqrt{\frac{d}{4} \times \frac{h_f}{150}}$$

Squaring both sides,

$$8^2 = 11,200 \times \frac{8}{12 \times 4} \times \frac{h_f}{150}$$

$$\text{Therefore, } h_f = \frac{12 \times 4 \times 64 \times 150}{8 \times 11,200}$$

$$= 5.15 \text{ ft. of water.}$$

60. Reynolds' Experiments on Flow Through Pipes.

Reynolds† measured the loss of head in a pipe by measuring the fall of pressure over a known length of the pipe; from this “ i ,” the slope of the hydraulic gradient, was obtained. For,

$$i = \frac{h_f}{l}$$

* For results of experiments on pipe flow made by Darcy and others, see Barnes' *Hydraulic Flow Reviewed*.

† For complete account of Reynolds' experiments, see *Phil. Trans.*, 1883.

Reynolds' apparatus is shown in Fig. 56A.

The velocity of the water in the pipe was obtained by measuring the discharge over a known time; then

$$v = \frac{\text{discharge per sec.}}{\text{area of cross-section of pipe}}$$

This was repeated for several velocities, and the results were then plotted as shown in Fig. 57, the base of the graph representing v and the ordinate representing i . The graph obtained

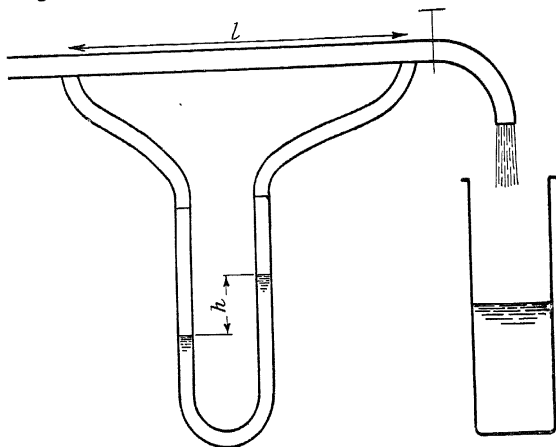


FIG. 56A

was found to be a straight line up to a certain velocity, beyond this velocity the graph was curved.

The graph is evidently following a law of the type

$$i = k v^n$$

where k and n are constants. For the straight line portion of the graph, n equals unity. The value of n for the curved portion of the graph can be found by plotting $\log i$ and $\log v$.

For, $i = k v^n$

Then, $\log i = \log k + n \log v$ (1)

When $v = 1$, $\log v = 0$, then $\log i = \log k$, from which the value of k can be found.

$$\text{Also, from Equation (1), } n = \frac{\log i - \log k}{\log v}$$

These logs are shown plotted in Fig. 58. For the portion of the graph over which n is unity the straight line AB was obtained; the remaining portion of the graph gave the straight line CD . The line BC , which joins the other two lines, follows no defined law and is due to the changing from one type of flow to the other.

It follows from this graph that the flow of the water consists of two types—

- (1) a steady or stream line flow up to the point B ;




FIG. 57

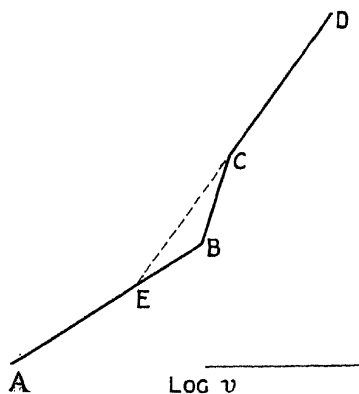


FIG. 58

- (2) an unsteady or eddy flow for the higher velocities beyond B . This is sometimes known as a turbulent flow.

The point B , at which point the change from steady to turbulent flow takes place, is known as the critical velocity.

After the highest velocity had been reached the experiment was continued by gradually reducing the velocities and again measuring the loss of head; the points on the curve then retraced the line DC . On reaching C the points continued in the same straight line to E , and finally retraced the line EA . Hence, the path EBC was only followed when the velocities

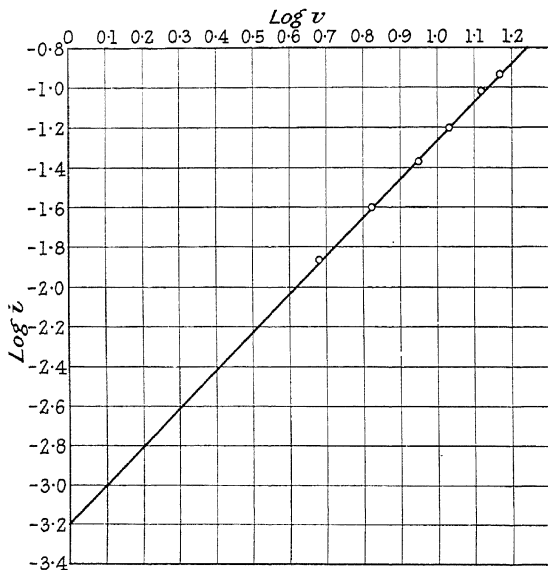


FIG. 59

were increasing. Reynolds concluded from this that the path EBC was due to the inertia of the water in changing from steady flow to turbulent flow and that the point E is the true critical velocity. The point E is known as the lower critical velocity, and is assumed to be the true critical velocity.

Reynolds repeated these experiments with pipes of different diameters and with water at different temperatures. From these results he found that the value of the critical velocity varies inversely with the diameter of the pipe and inversely with the temperature of the water.

These results hold for all other liquids; the value of the

critical velocity of any liquid will also depend on the density of the liquid and on its viscosity.*

In all practical engineering problems it is found that the velocities used are all above the critical velocity; and in all large pipes, such as used in practice, the suffix "*n*" approximates to 2 which agrees with the practical friction formula given in Art. 59.

EXAMPLE.

An experiment was carried out on an 8 in. diameter wrought iron pipe over a length of 8 ft. The velocity of flow through the pipe was varied and the loss of head for each velocity was measured. The following values of *i* were obtained—

<i>v</i> (ft. per sec.)	.	.	4.7	6.5	8.72	10.6	12.8	14.6
<i>i</i>	.	.	.0134	.0250	.0425	.0629	.0975	.1171

Find the values of *k* and *n* in the formula $i = kv^n$

First plot $\log i$ and $\log v$.

$\log v$.	.	.672	.813	.941	1.025	1.107	1.164
$\log i$.	.	-1.873	-1.602	-1.371	-1.201	-1.013	-.931

These are shown plotted in Fig. 59.

$$\begin{aligned} \text{When } \log v = 0, \log k &= \log i \\ &= -3.19 \\ &= \bar{4}.81 \end{aligned}$$

$$\text{Therefore, } k = .000645$$

$$\begin{aligned} n &= \frac{\log i - \log k}{\log v} \\ &= \frac{-2.6 + 3.19}{.302} \\ &= 1.955 \end{aligned}$$

$$\text{Then, } i = .000645 v^{1.955}$$

61. Determination of Critical Velocity. Besides the method given in Art. 60 there are two other methods of obtaining the critical velocity of water.

(a) COLOUR BANDS (REYNOLDS' METHOD). The critical velocity may be determined by allowing water to flow through a glass tube and injecting a thin stream of coloured liquid into the centre of the stream (Fig. 60). As long as the velocity in

* See Chapter XII on Viscous Flow.

the glass tube is below the critical velocity, the colour band will remain a thin straight line flowing along the centre of the stream. But for velocities above the critical velocity, the coloured band is broken up by eddies and mixes with the water, as in Fig. 61.

(b) **CHANGE OF TEMPERATURE.** Barnes and Coker* determined the critical velocity by measuring the temperature of the stream for various velocities. As the frictional resistance below the critical velocity is proportional to v and, above the critical velocity, to v^n , it follows that more heat will be generated above the critical velocity. If the temperature of the water is




FIG. 60



FIG. 61

plotted on a base representing the velocity, the curve will become much steeper beyond the critical velocity, as shown in Fig. 62. The critical velocity will be represented by the kink in the curve.

62. Distribution of Velocity in a Pipe.

The velocity of water flowing along a pipe will vary at different points of the cross section, its magnitude depending on the radius. The velocity of flow at any radius may be measured with a Pitot tube. It is found that the velocity is a maximum at the centre and a minimum at the circumference. The variation is shown in the curve of Fig. 63, the velocity being plotted horizontally on the diameter of the pipe as a base.

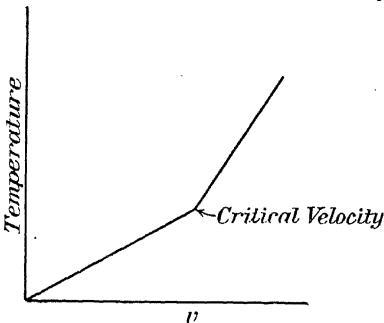


FIG. 62

It is found that the maximum velocity is about 1.2 times the mean velocity.

63. Flow through Long Pipes. The velocity of water flowing through a pipe may be found by applying Bernoulli's

* *Proceedings of the Royal Society*, vol. 74.

equation to the two ends of the pipe and allowing for any loss of head in the pipe. In all such problems the most convenient formula for the frictional head lost is

$$h_f = \frac{4flv^2}{d2g}$$

as it is necessary to express all unknown terms as a function of the velocity head.

Suppose water flows from a reservoir *A* (Fig. 64) under a constant head H_A into a reservoir *B* in which there is a constant head of H_B . Let the height of centre of pipe at *A* be Z_A , and at *B* be Z_B . Let v be the velocity of flow through the pipe, l be the length, and d the diameter.

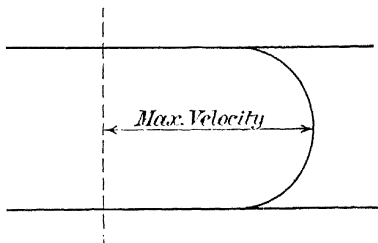


FIG. 63

$$\text{Then, } h_f = \frac{4flv^2}{d2g},$$

$$\text{and, head lost at entrance of pipe} = \frac{5v^2}{2g}$$

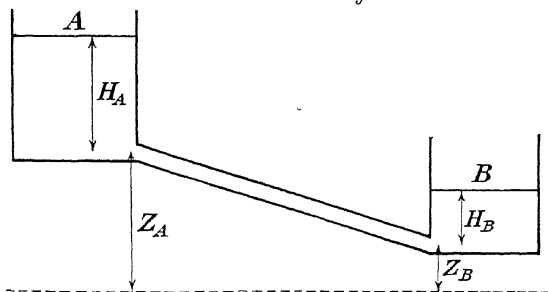


FIG. 64

Applying Bernoulli's equation to points just beyond each end of the pipe,

$$H_A + Z_A = H_B + Z_B + \frac{5v^2}{2g} + \frac{4flv^2}{d2g} + \frac{v^2}{2g}$$

The term $\frac{v^2}{2g}$ will be lost on entering *B*.

It will be noticed that $(H_A + Z_A) - (H_B + Z_B)$ is the difference in level of the water surfaces in A and B ; hence,

$$\left. \begin{array}{l} \text{difference in level} \\ \text{of water surfaces} \end{array} \right\} = \frac{v^2}{2g} \left(1.5 + \frac{4fl}{d} \right)$$

From this equation the unknown velocity may be obtained. If the pipe is long, the head lost in friction will be very large compared with the head lost at the two ends of the pipe; in which case the latter may be neglected.

If the pipe in Fig. 64, instead of discharging into the

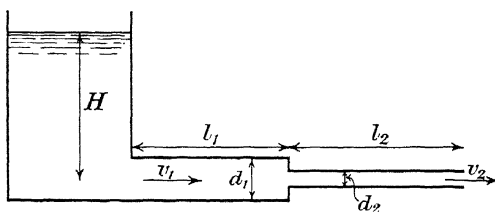


FIG. 65

reservoir B , discharged into the atmosphere, the equation would then be

$$H_A + Z_A = Z_B + \frac{.5 v^2}{2g} + \frac{4fl}{d} \frac{v^2}{2g} + \frac{v^2}{2g}$$

the last term being the velocity head of the discharging water.

This may be written

$$H = \frac{2g}{v^2} \left(1.5 + \frac{4fl}{d} \right) \frac{v^2}{2g}$$

where H is the height of water level in A above outlet of pipe.

Suppose water flows from a tank through a pipe of which the diameter is varied as in Fig. 65.

As quantity of water flowing per second is constant,

$$v_1 \frac{\pi}{4} d_1^2 = v_2 \frac{\pi}{4} d_2^2$$

$$\text{then,} \quad v_1 = v_2 \left(\frac{d_2}{d_1} \right)^2$$

$$\begin{aligned}\text{Head lost in friction in large pipe} &= \frac{4f l_1 v_1^2}{d_1 2g} \\ &= \frac{4f l_1 v_2^2 \left(\frac{d_2}{d_1}\right)^4}{d_1 2g}\end{aligned}$$

$$\text{Head lost in friction in small pipe} = \frac{4f l_2 v_2^2}{d_2 2g}$$

$$\text{Total head lost in friction} = 4f \left\{ \frac{l_1 \left(\frac{d_2}{d_1}\right)^4}{d_1} + \frac{l_2}{d_2} \right\} \frac{v_2^2}{2g}$$

Applying Bernoulli's equation to points just outside each end of pipe,

$$\begin{aligned}H &= \frac{v_1^2}{2g} + \frac{v_2^2}{2g} + \text{head lost in friction} + \text{head lost at contraction} \\ &= \frac{.5 \left(\frac{d_2}{d_1}\right)^2}{2g} v_2^2 + \frac{1.5 v_2^2}{2g} + 4f \left\{ \frac{l_1 \left(\frac{d_2}{d_1}\right)^4}{d_1} + \frac{l_2}{d_2} \right\} \frac{v_2^2}{2g}\end{aligned}$$

From this equation, the velocity v_2 may be found. If the pipe is long, the velocity head, the head lost at entrance, and the head lost at the sudden contraction may be neglected as small.

EXAMPLE 1.

A cast-iron pipe, 6 in. diameter and 1,500 ft. long, connects two reservoirs. If the difference of water level in the two reservoirs is 96 ft., find the discharge through the pipe; $f = .01$. Ignore all losses other than friction.

Total head = velocity head + head lost in friction

$$\begin{aligned}96 &= \frac{v^2}{2g} + \frac{4f l v^2}{d 2g} \\ 96 &= \frac{v^2}{2g} \left(1 + \frac{4f l}{d} \right) \\ &= \frac{v^2}{64.4} \left(1 + \frac{4 \times .01 \times 1500}{.5} \right) \\ &= \frac{v^2}{64.4} (1 + 120)\end{aligned}$$

$$\text{Then, } v^2 = \frac{64.4 \times 96}{121} = 51.1$$

$$v = 7.15 \text{ ft. per sec.}$$

$$\text{Discharge} = \frac{\pi}{4} (.5)^2 \times 7.15 = 1.4 \text{ cu. ft. per sec.}$$

EXAMPLE 2.

Two reservoirs are connected by a straight pipe 1 mile long. For the first half of its length the pipe is 6 in. diameter; its diameter is then suddenly reduced to 3 in. The surface of the water in the upper reservoir is 100 ft. above that in the lower. Tabulate the losses of head which occur, including that at the sharp-edged entry, and determine the flow in gallons per minute. Assume $f = .01$. (London Univ., 1912.)

Let v_1 = velocity in 6 in. pipe

And v_2 = velocity in 3 in. pipe

As quantity of flow is the same in both pipes,

$$\frac{\pi}{4} (.5)^2 v_1 = \frac{\pi}{4} (.25)^2 v_2$$

$$\text{Then, } v_1 = \frac{v_2}{4}$$

$$\text{Head lost at entrance} = \frac{.5 v_1^2}{2g} = .03125 \frac{v_2^2}{2g}$$

$$\begin{aligned} \text{Head lost in 6 in. pipe due to friction} &= \frac{4fl v_1^2}{d 2g} \\ &= \frac{4 \times .01 \times 2640 \times v_2^2}{.5 \times 16 \times 2g} \\ &= 13.2 \frac{v_2^2}{2g} \end{aligned}$$

$$\text{Head lost at sudden contraction} = \frac{.5 v_2^2}{2g}$$

$$\begin{aligned} \text{Head lost in 3 in. pipe due to friction} &= \frac{4fl v_2^2}{d_2 2g} \\ &= \frac{4 \times .01 \times 2640 v_2^2}{.25 \times 2g} \\ &= 422 \frac{v_2^2}{2g} \end{aligned}$$

$$\text{Head lost at exit} = \frac{v_2^2}{2g}$$

$$\text{Total head lost} = \frac{v_2^2}{2g} (.03125 + 13.2 + .5 + 422 + 1)$$

$$= 436.73125 \frac{v_2^2}{2g}$$

$$= 100 \text{ ft}$$

$$\text{Then, } v_2^2 = \frac{64.4 \times 100}{436.73125} = 14.73$$

$$v_2 = 3.835 \text{ ft. per sec.}$$

$$\text{Discharge} = \frac{\pi}{4} (.25)^2 \times 3.835 \times 60 \times 6.24$$

$$= 705 \text{ gallons per minute}$$

EXAMPLE 3.

The difference of surface level in two reservoirs connected by a syphon is 25 ft. The length of the syphon is 2,000 ft.; its diameter is 12 in.; and $f = .01$. If the barometric height is 34 ft. and if air is liberated from solution when the absolute pressure is less than 4 ft. of water, what will be the maximum length of inlet leg of the syphon to run full, if the vertex is 18 ft. above the surface level in the upper reservoir? What will then be the discharge? (London Univ., 1925.)

The problem is represented by Fig. 55A; E being 18 ft. above the water level in A .

Let l = length of pipe between A and E .

First find the velocity of water in the pipe by applying Bernoulli's equation to points A and B , taking the water level in B as datum.

$$\begin{aligned} \text{Then, } 25 &= \frac{v^2}{2g} + \frac{4f \cdot 2000 \cdot v^2}{2g \cdot d} \\ &= \frac{v^2}{2g} \left(1 + \frac{4 \times .01 \times 2000}{1} \right) \end{aligned}$$

From which, $v = 4.45$ ft. per sec.

Next apply Bernoulli's equation to points A and E , taking the water level in A as datum. The limiting condition for the pipe to run full is when the absolute pressure at E is 4 ft. of water.

Take into account the atmospheric pressure at A .

Total energy at A = total energy at E

$$\text{Hence,} \quad 34 = 18 + \frac{v^2}{2g} \times \frac{4flv^2}{2gd} + 4$$

$$\begin{aligned} \text{Or,} \quad 12 &= \frac{v^2}{2g} \left(1 + \frac{4fl}{d} \right) \\ &= \frac{(4.45)^2}{2g} \left(1 + \frac{4 \times .01 l}{1} \right) \end{aligned}$$

From which, $l = 947$ ft.

$$\begin{aligned} \text{Discharge} &= \text{area of pipe} \times \text{velocity} \\ &= \frac{\pi}{4} \times 1 \times 4.45 \\ &= 3.49 \text{ cu. ft. per sec.} \end{aligned}$$

64. Parallel Flow through Pipes. Suppose water to be flowing along a pipe which, at a certain point, divides into two branches as in Fig. 66. Then, any particle of water will flow along the route ABD or the route ABC .

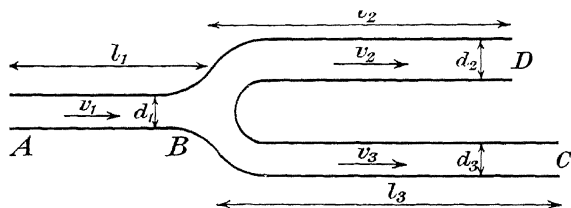


FIG. 66

Let H_A , H_D , and H_C be the total head at A , D , and C respectively.

Then, head causing flow along route $ABD = H_A - H_D$ - head lost in friction.

And, head causing flow along route $ABC = H_A - H_C$ - head lost in friction.

Let l_1 , d_1 and v_1 refer to pipe AB

l_2 , d_2 and v_2 refer to pipe BD

and l_3 , d_3 and v_3 refer to pipe BC

Then, for route ABD ,

$$H_A - H_D - \frac{4f l_1 v_1^2}{d_1 2g} - \frac{4f l_2 v_2^2}{d_2 2g} = \frac{v_2^2}{2g} \quad . \quad . \quad . \quad (1)$$

And, for route ABC ,

$$H_A - H_C - \frac{4f l_1 v_1^2}{d_1 2g} - \frac{4f l_3 v_3^2}{d_3 2g} = \frac{v_3^2}{2g} \quad . \quad . \quad . \quad (2)$$

Usually, the velocity heads given on the right of these equations are very small and may be written as zero.

Also, quantity flowing per second through AB equals sum of quantities through BD and BC .

$$\text{Then,} \quad v_1 d_1^2 = v_2 d_2^2 + v_3 d_3^2 \quad . \quad . \quad . \quad (3)$$

From Equations (1), (2), and (3) the three unknowns v_1 , v_2 , and v_3 may be obtained.

EXAMPLE.

Two pipes A and B , each 6 in. diameter, branch from a point C to a point D , which is 20 ft. below C . Pipe A is 300 yds. long and pipe B is 500 yds. long. Water is supplied at C under a head of 100 ft. A short pipe 3 in. diameter is fitted at D . Find the delivery when this pipe is fully open to the atmosphere. Take $v = 80 \sqrt{m}$ for pipes A and B . (Lond. Univ., 1917.)

Let v_A , v_B , and v be velocities in pipes A , B , and 3 in. pipe respectively.

$$\text{Total head} = 100 + 20 = 120 \text{ ft.}$$

Consider pipe A .

$$m = \frac{d}{4} = \frac{.5}{4} = \frac{1}{8}$$

$$v_A = 80 \sqrt{\frac{1}{8} \times \frac{h_f}{900}}$$

$$\text{Then,} \quad h_f = 1.125 v_A^2$$

Consider pipe B .

$$v_B = 80 \sqrt{\frac{1}{8} \times \frac{h_f}{1500}}$$

$$\text{Then, } h_f = 1.875 v_B^2$$

As pressure at C and D is the same in both pipes,

$$\frac{v_A^2}{2g} + 1.125 v_A^2 = \frac{v_B^2}{2g} + 1.875 v_B^2$$

$$\text{from which, } v_A = 1.285 v_B \quad . \quad . \quad . \quad . \quad (1)$$

Consider route B ,

$$\text{Total head} = \frac{v^2}{2g} + \text{frictional head lost in } B$$

$$\text{Or, } 120 = \frac{v^2}{2g} + 1.875 v_B^2 \quad . \quad . \quad . \quad . \quad (2)$$

Also, quantity flowing through 3 in. pipe equals sum of quantities through A and B .

$$\text{That is, } \frac{\pi}{4} (.25)^2 v = \frac{\pi}{4} (.5)^2 (v_A + v_B)$$

Substituting from Equation (1),

$$v = 4(1.285 v_B + v_B) = 9.14 v_B$$

Substituting in Equation 2,

$$120 = \frac{v^2}{64.4} + 1.875 \left(\frac{v}{9.14} \right)^2$$

$$\text{from which, } v = 56.2 \text{ ft. per sec.}$$

$$\text{Discharge} = \frac{\pi}{4} (.25)^2 \times 56.2 = 2.76 \text{ cu. ft. per sec.}$$

65. Time of Emptying Tank through Pipe. Let a reservoir or tank be emptied by means of a long pipe of length l and diameter d . Let the area of water surface in the reservoir be A , and the height of the water level above the outlet of

pipe be H_1 ft. Let v be the velocity of flow in the pipe. It is required to find the time taken to lower the water level in the reservoir from H_1 ft. to H_2 ft. above the outlet of pipe. Ignore all losses but friction.

$$\text{Head lost in friction in pipe} = \frac{4 f l v^2}{d 2g}$$

Consider the instant when the water level is h ft. above the outlet of pipe and let the water level fall by a small amount dh in the time dt .

Then, quantity flowing from reservoir equals quantity passing along pipe.

$$\text{Or,} \quad A dh = \frac{\pi}{4} d^2 v dt \quad . \quad . \quad . \quad (1)$$

$$\begin{aligned} \text{But,} \quad h &= \frac{v^2}{2g} + \frac{4 f l v^2}{d 2g} \\ &= \frac{v^2}{2g} \left(1 + \frac{4 f l}{d} \right) \end{aligned}$$

$$\text{From which,} \quad v = \sqrt{\frac{2gh}{\left(1 + \frac{4 f l}{d} \right)}}$$

Substituting this value of v in Equation (1),

$$\begin{aligned} A dh &= \frac{\pi}{4} d^2 \frac{\sqrt{2gh}}{\sqrt{1 + \frac{4 f l}{d}}} dt \\ dt &= \frac{4 A \sqrt{1 + \frac{4 f l}{d}} h^{-\frac{1}{2}} dh}{\pi d^2 \sqrt{2g}} \end{aligned}$$

Therefore,

$$\begin{aligned} \text{Total time} \quad = t &= \frac{4 A \sqrt{1 + \frac{4 f l}{d}}}{\pi d^2 \sqrt{2g}} \int_{H_2}^{H_1} h^{-\frac{1}{2}} dh \\ &= \frac{8 A \sqrt{1 + \frac{4 f l}{d}}}{\pi d^2 \sqrt{2g}} (H_1^{\frac{1}{2}} - H_2^{\frac{1}{2}}) \quad . \quad (2) \end{aligned}$$

EXAMPLE.

Two tanks, the bottom of which are on the same level, are connected with one another by a horizontal pipe 3 in. diameter, 1,000 ft. long, and bell mouthed at each end. One tank is of size 20 by 20 ft. and contains water to a depth of 20 ft., the other tank is of size 15 by 15 ft. and holds water to a depth of 10 ft.

If the tanks are put in communication with one another by means of the pipe (which is full of water), how long will it be before the water level in the larger tank falls from a height of 19 ft. to 17 ft. ? Assume $f = .01$. (London Univ., 1915.)

This question is shown diagrammatically in Fig. 67.

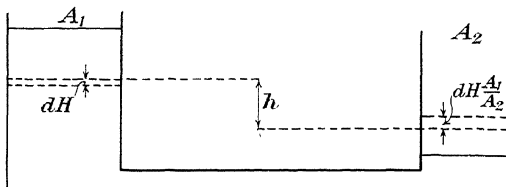


FIG. 67

Let A_1 and A_2 be the areas of the large and small tanks respectively.

Let h = difference of water level in tanks at any instant.

Let water level in A_1 fall by amount dH in time dt .

Then, level in small tank rises by $dH \frac{A_1}{A_2}$. Let dh be difference in head causing flow due to this change.

$$\begin{aligned} \text{Then,} \quad dh &= dH + dH \frac{A_1}{A_2} \\ &= dH \left(1 + \frac{A_1}{A_2} \right) \quad . \quad . \quad . \quad (1) \end{aligned}$$

Let a , v , d , and l be the area, velocity, diameter, and length of pipe respectively.

As quantity flowing from large tank equals quantity flowing along pipe,

$$A_1 dH = a v dt \quad . \quad . \quad . \quad (2)$$

$$\begin{aligned} \text{But,} \quad h &= \frac{v^2}{2g} + \frac{4flv^2}{d2g} \\ &= \frac{v^2}{2g} \left(1 + \frac{4fl}{d} \right) \quad . \quad . \quad . \quad (3) \end{aligned}$$

Substituting Equations (1) and (3) in (2),

$$A_1 \frac{dh}{\left(1 + \frac{A_1}{A_2}\right)} = a \sqrt{\frac{2g h}{\left(1 + \frac{4f l}{d}\right)}} dt$$

Therefore,

$$dt = \frac{A_1 \sqrt{1 + \frac{4f l}{d}} h^{-\frac{1}{2}} dh}{\left(1 + \frac{A_1}{A_2}\right) a \sqrt{2g}}$$

Integrating between the limits of H_1 and H_2 ,

$$t = \frac{2A_1 \sqrt{1 + \frac{4f l}{d}} (H_1^{\frac{1}{2}} - H_2^{\frac{1}{2}})}{\left(1 + \frac{A_1}{A_2}\right) a \sqrt{2g}} \quad (4)$$

In this question, $A_1 = 20 \times 20 = 400$ sq. ft.

$$A_2 = 15 \times 15 = 225 \text{ sq. ft.}$$

$$a = \frac{\pi}{4} \left(\frac{1}{4}\right)^2 = .0491 \text{ sq. ft.}$$

$$H_1 = 19 - \left(10 + \frac{400}{225}\right) = 7.22 \text{ ft.}$$

$$H_2 = 17 - \left(10 + \frac{3 \times 400}{225}\right) = 1.66 \text{ ft.}$$

Substituting these values in Equation (4)

$$\begin{aligned} t &= \frac{2 \times 400 \sqrt{1 + \frac{4 \times .01 \times 1000}{.25}} (7.22^{\frac{1}{2}} - 1.66^{\frac{1}{2}})}{\left(1 + \frac{400}{225}\right) .0491 \sqrt{64.4}} \\ &= 13,150 \text{ sec.} \\ &= 219 \text{ minutes.} \end{aligned}$$

66. Flow of Gases through Pipes. The frictional resistance of gas flowing along a pipe may be found from the same

frictional formula as liquids. The head causing flow must be in feet of gas and if the pipe is sloping the slight difference of atmospheric pressure due to change of altitude must be taken into account.

Let gas be flowing up a sloping uniform pipe length of l and diameter d .

Then, head lost in friction $= \frac{4 f l v^2}{d 2g}$ ft. of gas.

Let w = weight of 1 cu. ft. of water

w_1 = weight of 1 cu. ft. of gas

and w_2 = weight of 1 cu. ft. of air

Let h_1 be height of upper end of pipe above lower end.

Then, atmospheric pressure at lower end is h_1 ft. of air greater than at upper end. But pressure of gas at lower end is greater than pressure at higher end by h_1 ft. of gas.

Then, head causing flow due to change of altitude

$$= h_1 \text{ ft. of air} - h_1 \text{ ft. of gas.}$$

$$= \left(h_1 \frac{w_2}{w_1} - h_1 \right) \text{ ft. of gas.}$$

Suppose the pressure of gas above atmosphere be measured with a U-tube containing water.

Let y_1 = pressure of gas at lower end in feet of water

and y_2 = pressure of gas at higher end in feet of water.

Then, head causing flow due to difference of pressure

$$= (y_1 - y_2) \text{ feet of water}$$

$$= (y_1 - y_2) \frac{w}{w_1} \text{ ft. of gas}$$

Total head causing flow $= h_1 \frac{w_2}{w_1} - h_1 + (y_1 - y_2) \frac{w}{w_1}$ ft. of gas

$$\text{Then, } h_1 \frac{w_2}{w_1} - h_1 + (y_1 - y_2) \frac{w}{w_1} = \frac{4 f l v^2}{d 2g} + \frac{v^2}{2g} \quad (1)$$

If the gas is flowing down the pipe h_1 will be negative.

If the pipe is horizontal $h_1 = 0$,

Equation (1) then becomes

$$(y_1 - y_2) \frac{w}{w_1} = \frac{4 f l v^2}{d 2g} + \frac{v^2}{2g} \quad (2)$$

Unwin found the coefficient of friction f to be equal to $.0044 \left(1 + \frac{1}{7d}\right)$ for coal gas.

EXAMPLE.

Gas is supplied from a holder at a gauge pressure of 4 in. of water to a pipe 6 in. diameter, 300 ft. long, which rises to and discharges at a height of 50 ft. above the level of the outlet of the holder. The pressure at the pipe outlet must be not less than 1 in. of water by gauge. Find the delivery in cubic feet per hour. Take the weights of the gas and air as .045 and .08 lb. per cu. ft. respectively and the coefficient of friction as .008. (London Univ., 1912.)

Applying Equation (1),

$$\begin{aligned} \left(50 \times \frac{.08}{.045}\right) - 50 + (.333 - .0834) \frac{62.4}{.045} &= \frac{v^2}{2g} \left(1 + \frac{4 \times .008 \times 300}{.5}\right) \\ 88.9 - 50 + 346.5 &= \frac{v^2}{2g} (1 + 19.2) \end{aligned}$$

From which, $v = 35$ ft. per sec.

$$\text{Delivery} = \frac{\pi}{4} (.5)^2 \times 35 \times 3600 = 24,750 \text{ cu. ft. per hour.}$$

67. Transmission of Power through Pipes. If power is transmitted through a considerable distance by means of water under pressure, the power supplied will be in proportion to the quantity of water per second passing through the pipe, and to the total head of the water. As the water flows along the pipe it will be subjected to a loss of head due to friction. It can be shown that the maximum power is transmitted by a pipe when the frictional loss of head is one-third of the total head supplied.

Let H = total head supplied at entrance to pipe

h_f = head lost due to friction

and let v , d , and l be the velocity of flow through pipe, the diameter of pipe, and length of pipe respectively.

$$\text{Then,} \quad h_f = \frac{4 f l v^2}{d 2g}$$

$$\begin{aligned} \text{Total head available at outlet of pipe} &= H - h_f \\ &= H - \frac{4 f l v^2}{d 2g} \end{aligned}$$

$$\text{Available horse-power} = \frac{w \pi d^2 v}{4 \times 550} \left(H - \frac{4 f l v^2}{d 2g} \right)$$

as $w \frac{\pi}{4} d^2 v$ = weight of water flowing per second.

$$\text{From which, } H.P. = \frac{w \pi d^2}{4 \times 550} \left(H v - \frac{4 f l v^3}{d 2g} \right)$$

This will be a maximum when the amount inside the bracket is a maximum. Differentiating this with respect to v and equating to zero for a maximum,

$$\frac{d.(H.P.)}{dv} = H - 3 \left(\frac{4 f l v^2}{d 2g} \right) = 0$$

$$\text{Or,} \quad H - 3 h_f = 0$$

$$\text{Therefore,} \quad H = 3 h_f$$

That is, the horse-power transmitted is a maximum when the head lost in friction is one-third of total head supplied.

For any pipe line transmitting power,

$$\text{efficiency of transmission} = \frac{H - h_f}{H}$$

Power is transmitted through water pipes for working hydraulic machines. The supply of water under pressure for power purposes was being developed in large cities during the latter half of the nineteenth century; but the commercializing of electricity has mainly displaced this method of power transmission.

EXAMPLE.

A hydraulic machine is supplied with water through a horizontal pipe 3,000 ft. long. The brake horse-power of the hydraulic machine is 50, and its mechanical efficiency is 80 per cent. Gauges fitted to the supply pipe show that the pressure at the power station end is 750 lb. per sq. in.; and at the machine 680 lb. per sq. in. If the coefficient of resistance, f , for the pipe is .008, determine (1) the diameter of the supply pipe, (2) the velocity of flow. (London Univ., 1917.)

Let a , d , and v be area, diameter, and velocity of pipe respectively.

$$\begin{aligned}\text{Horse-power supplied by machine} &= 50 \times \frac{100}{80} = 62.5 \\ &= \frac{WH}{550} \\ &= \frac{62.4 a v}{550} \times \frac{680 \times 144}{62.4}\end{aligned}$$

$$\text{From which} \quad av = .351 = \frac{\pi}{4} d^2 v$$

$$\text{Then,} \quad d^2 v = .447 \quad . \quad . \quad . \quad (1)$$

$$\begin{aligned}\text{Head lost in friction in pipe} &= (750 - 680) \frac{144}{62.4} \\ &= 161.8 \text{ ft. of water} \\ &= \frac{4 f l v^2}{d 2g}\end{aligned}$$

$$\text{Therefore,} \quad 161.8 = \frac{4 \times .008 \times 3000 v^2}{d \times 64.4}$$

$$\text{From which,} \quad \frac{v^2}{d} = 108.6 \quad . \quad . \quad . \quad (2)$$

Substituting for d from Equation (1),

$$v^5 = 5280$$

$$\text{Then,} \quad v = 5.55 \text{ ft. per sec.}$$

Substituting this value of v in Equation (2),

$$d = \frac{5.55^2}{108.6} = .284 \text{ ft.}$$

68. Flow through Nozzles. A nozzle is a tapering mouth-piece which is fitted to the outlet end of a pipe for the purpose of converting the total head of the water into velocity head. They are used on the end of hose pipes and in some forms of turbines. As the pressure of the jet issuing from the nozzle is atmospheric, the whole of the energy will be kinetic. The loss of energy in the nozzle itself will be small compared with the frictional loss in the pipe to which the nozzle is fixed, and may, therefore, be neglected.

In Art. 67 it was proved that for the maximum power to be transmitted along the pipe, the loss of head in the pipe due to friction must be one-third of the total head supplied. In which case, the loss of head due to friction will be one-half of the total head in the nozzle. By making use of this fact it is possible to obtain the ratio of the area of nozzle to area of supply pipe for maximum transmission of power.

Consider the pipe and nozzle of Fig. 68.



FIG. 68

Let l = length of supply pipe

D = diameter of supply pipe

V = velocity in supply pipe

f = coefficient of frictional resistance of supply pipe

a = area of outlet end of nozzle

and v = velocity of jet issuing from nozzle

For maximum transmission of power,

head lost in friction in supply pipe = $\frac{1}{3}$ total head supplied
 = $\frac{1}{2}$ velocity head at nozzle

$$\text{Or,} \quad \frac{4flV^2}{D2g} = \frac{1}{2} \times \frac{v^2}{2g} \quad . \quad . \quad . \quad (1)$$

But, as quantity flowing through pipe equals quantity passing through nozzle,

$$VA = va$$

Therefore,

$$\frac{v}{V} = \frac{A}{a} \quad . \quad . \quad . \quad (2)$$

From Equation (1),

$$\frac{8fl}{D} = \frac{v^2}{V^2}$$

Substituting from Equation (2),

$$\frac{8fl}{D} = \left(\frac{A}{a}\right)^2$$

Therefore,

$$\frac{A}{a} = \sqrt{\frac{8fl}{D}} \quad . \quad . \quad . \quad (3)$$

This gives the ratio between the areas of nozzle and supply pipe for maximum transmission of power.

$$\begin{aligned}\text{Horse-power of jet} &= \frac{\text{Kinetic energy per second}}{550} \\ &= \frac{wa v \times v^2}{2g \ 550} = \frac{wa v^3}{2g \ 550}\end{aligned}$$

If the jet were projected vertically upwards the height the water would reach $= \frac{v^2}{2g}$

If the area of the supply pipe and jet do not conform with Equation (3), the pipe will not be transmitting the maximum horse-power possible. If such be the case,

$$\text{head transmitted by pipe} = H - \frac{4f L V^2}{2g D}$$

where H is the head supplied at the source.

Substituting from Equation (2) for V ,

$$\text{head transmitted by pipe} = H - \frac{4f L}{2g D} \left(\frac{v a}{A} \right)^2$$

$$\begin{aligned}\text{But,} \quad \text{head transmitted} &= \text{Kinetic energy at nozzle} \\ &= \frac{v^2}{2g} \text{ per lb. of water.}\end{aligned}$$

$$\text{Hence,} \quad H - \frac{4f L}{2g D} \frac{a^2}{A^2} v^2 = \frac{v^2}{2g}$$

$$\text{From which,} \quad v = \sqrt{\frac{2g H}{1 + \frac{4f L a^2}{D A^2}}}$$

$$\begin{aligned}\text{Horse-power transmitted} &= \text{horse-power of jet} \\ &= \frac{(wa v) v^2}{550 \times 2g}\end{aligned}$$

$$\begin{aligned}\text{Efficiency of transmission} &= \frac{\text{Head transmitted}}{\text{Head supplied}} \\ &= \frac{v^2}{2g H}\end{aligned}$$

EXAMPLE 1.

The head of water at one end of a pipe, 200 yds. long, 3 in. in diameter, is 100 ft., and f for the main is .01. What diameter of nozzle fitted to the end will give the maximum power, and what will the power then be? If a formula is used it must be proved. (London Univ., 1911.)

Using Equation (3) let d be the diameter of nozzle,

$$\frac{A}{a} = \sqrt{\frac{8fl}{D}}$$

Then,
$$\frac{D^2}{d^2} = \sqrt{\frac{8 \times .01 \times 600}{.25}} = 13.85$$

And,
$$d = \sqrt{\frac{(.25)^2}{13.85}} = .067 \text{ ft.} = .806 \text{ in.}$$

$$h_f = \frac{H}{3} = \frac{4fLV^2}{2gD}$$

That is,
$$\frac{100}{3} = \frac{4 \times .01 \times 600 V^2}{64.4 \times \frac{1}{4}}$$

From which, $V = 4.72 \text{ ft. per sec.}$

Then, $v = 4.72 \times 13.85 = 65.4 \text{ ft. per sec.}$

and,
$$H.P. = \frac{wa v^3}{550 \times 2g} = \frac{62.4 \times \left(\frac{\pi}{4} \times .067^2\right) \times 65.4^3}{550 \times 64.4} = .171$$

EXAMPLE 2.

A horizontal pipe, 6 in. internal diameter and 540 ft. long, conducts water from a reservoir. When the water level in the reservoir is 4 ft. above the axis of the pipe the discharge through the pipe is 29.7 cu. ft. per min. If a nozzle tapering from 6 to 1½ in. internal diameter were fitted to the free end of the pipe, what would be the horse-power of the jet if the level of water in the reservoir were increased to 40 ft. above the axis of the pipe? (London Univ., 1919.)

In the first case,
$$V = \frac{29.7}{60 \times \frac{\pi}{4} \times \frac{1}{4}} = 2.52 \text{ ft. per sec.}$$

Also,
$$H = \frac{V^2}{2g} \left(1 + \frac{4fl}{D}\right)$$

That is,
$$4 = \frac{2.52^2}{64.4} \left(1 + \frac{4 \times 540l}{.5}\right)$$

From which, $f = .00916$

$$\text{In the second case, } H = \frac{V^2}{2g} + \frac{4flV^2}{2gD}$$

$$\text{and as } v = \frac{VA}{a}$$

$$H = \frac{V^2}{2g} \left\{ \left(\frac{A}{a} \right)^2 + \frac{4fl}{D} \right\}$$

$$\text{That is, } 40 = \frac{V^2}{64.4} \left\{ \left(\frac{36}{2.25} \right)^2 + \frac{4 \times .00916 \times 540}{.5} \right\}$$

$$\text{From which, } V = 2.95 \text{ ft. per sec.}$$

$$\text{and, } v = 47.2 \text{ ft. per sec.}$$

$$\begin{aligned} \text{Horse-power of jet} &= \frac{wa v^3}{2g \times 550} \\ &= \frac{62.4 \times .785 \times \left(\frac{1}{8} \right)^2 \times 47.2^3}{64.4 \times 550} \\ &= 2.27 \end{aligned}$$

68A. Hammerblow in Pipes. If water is flowing along a long pipe and is suddenly brought to rest by the closing of a valve, or by any similar cause, there will be a sudden rise in pressure due to the momentum of the moving water being destroyed. This will cause a pressure wave to be transmitted along the pipe which may set up noises known as knocking. The magnitude of this pressure will depend on the speed at which the valve is closed and on the length of the pipe. Knocking may often be heard in the water pipes of ordinary dwelling-houses if the tap be turned off quickly.

This sudden rise in pressure in a pipe due to the stoppage of the flow is known as the hammerblow.

Consider a long pipe of length “ l ” ft. and of cross-sectional area “ a ” sq. ft.; let water be flowing along the pipe with a velocity of v ft. per sec., and, due to the closing of a valve, let the water be brought to rest in t secs.

$$\text{Then, retardation of water} = f = \frac{v}{t} \text{ ft. per sec.}^2$$

$$\text{Mass of moving column of water} = \frac{wal}{g}$$

$$\text{As force} = \text{Mass} \times \text{retardation,}$$

$$\text{force on valve} = \frac{wal}{g} \times f \text{ lbs.}$$

$$\begin{aligned}\text{Intensity of pressure on valve} &= p = \frac{\text{force}}{\text{area}} \\ &= \frac{w l f}{g} \text{ lb. per sq. in.}\end{aligned}$$

$$\text{Or,} \quad p = \frac{w l v}{g t} \text{ lb. per sq. in.}$$

From this equation the magnitude of the pressure wave can be found.

This is the simple theory only; actually the water would compress on account of its bulk elastic modulus, and the pipe would expand laterally on account of its modulus of elasticity; these would both affect the problem, making it too complicated to be dealt with here.*

The Dorman Wave Transmission† for working hydraulic drills in mines is based on this principle. A blow from a piston is given to the water in a long pipe, which causes a pressure wave to travel the full length. At the other end of the pipe the pressure wave is made to work the drill. By this means, power is transmitted through a pipe containing water although the water itself does not flow.

EXAMPLE.

A hydraulic pipe line is 2 miles long. The velocity of flow is 4 f.s. A valve at the lower end is closed at such a rate as to produce uniform retardation in the water column. Calculate the rise in pressure behind the valve if the latter is closed: (a) in 20 secs.; (b) in 1 sec. (A.M.Inst. C.E., 1926.)

(a) Using the equation:

$$\begin{aligned}p &= \frac{w l v}{g t} \\ &= \frac{62.4 \times 2 \times 5280 \times 4}{32.2 \times 20} \\ &= 4,100 \text{ lb. per sq. ft.}\end{aligned}$$

$$\begin{aligned}(b) \quad p &= \frac{62.4 \times 2 \times 5280 \times 4}{32.2 \times 1} \\ &= 82,000 \text{ lb. per sq. ft.}\end{aligned}$$

* See *Water Hammer in Hydraulic Pipe Lines* (Gibson).

† See *Theory of Wave Transmission* (Constantinesco) for mathematical treatment; and article entitled "Dorman Wave Transmission" in *Conquest*, December, 1920, for description.

EXAMPLES 6.

(1) Find the loss of head due to friction in a pipe, 1,000 ft. long and 6 in. diameter, when the quantity of water flowing is 600 gallons per min. $f = .01$.

Ans.—83 ft. of water.

(2) Using the formula $v = C\sqrt{mi}$, find the loss of head due to friction in a circular pipe, 100 ft. long and 3 in. diameter, when the velocity of flow is 6 ft. per sec. $C = 100$.

Ans.—5.76 ft

(3) Draw curves showing the nature of the results obtained by Froude in regard to the surface friction of planes, of varying length and of different materials, moving through water. If $f = .0035$ and $n = 1.83$, find the horsepower required to overcome the skin resistance of a ship, wetted surface, 24,000 sq. ft., when going at 18 knots. One knot = 1.69 ft. per sec. (London Univ., 1911.)

Ans.—2,420.

(4) Assuming that $R = fA V^2$ to be the law of friction between a flow and a surface, find an expression for the work lost per second when a disc of radius r is rotated in water with a circumferential velocity v .

If the disc is surrounded by a free vortex of double its diameter, compare the loss due to the friction of the vortex on the flat sides of the vortex chamber with the loss due to the friction on the above-mentioned disc. (London Univ., 1913.)

Ans.— $\frac{4}{5} \pi f v^3 r^2$; $32 - 1$.

(5) The friction of a thin flat brass plate when towed edgewise through water at a velocity of 10 ft. per sec. is equal to .21 lb. per sq. ft. of wetted surface, and the friction is found to vary as $V^{1.2}$.

Find how many foot-pounds of energy per minute are absorbed by the skin friction of the two surfaces of a flat circular disc, the external diameter of which is 24 in., and the internal diameter 12 in., if the disc makes 450 revolutions per minute. (London Univ., 1916.)

Ans.—27,800 ft. lb. per min.

(6) What do you understand by the expression “critical” velocity of flow in a pipe?

Describe experiments on the loss of head when water flows at known velocities through a horizontal pipe of constant cross section.

What is the law when (a) the velocity is less than the “critical”; (b) the velocity exceeds the “critical”? (London Univ.)

Ans.—(a) kv ; (b) kv^n .

(7) Obtain an expression for the head lost in a pipe due to a sudden enlargement of area.

Comment on any assumption made.

A pipe 2 in. diameter is 20 ft. long and the velocity of the water in the pipe is 8 ft. per sec. What loss of head would be saved if the central 6 ft. length of pipe were replaced by 3 in. diameter pipe, the changes of section being sudden.

Take the frictional coefficient $f = .01$, and the coefficient of contraction .62. (London Univ., 1921.)

Ans.—52.

(8) Water is discharged from a reservoir through a pipe 1 ft. diameter for 1 mile of its length, the pipe then suddenly enlarging to 2 ft. diameter for the second mile.

There are two right-angled easy bends in each mile, and the difference of head between entrance and discharge ends of the pipe is 100 ft. Calculate the discharge in gallons per minute and all losses in the pipe if the coefficient of friction is $\cdot 008$.

Draw the hydraulic gradient. (London Univ., 1920.)

Ans.—1,780 gallons per minute.

(9) Two reservoirs *A* and *B* discharge through circular pipes each 2 ft. in diameter and 1 mile long to a junction at *D*. From *D* the joint discharge is carried in a straight line with the discharge pipe from *A* to a third reservoir *C* by a 3 ft. diameter pipe. The surface level at *A* is 50 ft., and that of *B* 30 ft. above that of *C*. Neglecting all losses other than pipe friction, find the discharge in gallons per minute from each reservoir.

Coefficient of friction = $\cdot 0075$. (London Univ., 1920.)

Ans.—7,500 and 5,800 gallons per minute.

(10) A high level reservoir feeds two low service reservoirs by means of a single main 5 miles long, 30 in. diameter, laid at a slope of 10 ft. per mile. The main is then forked, and one branch, 2 miles long with a fall of 15 ft. per mile, serves one reservoir, whilst the other is served by a pipe 3 miles long with a fall of 12 ft. per mile. Calculate the diameters of these branch pipes so that each may deliver 4,000,000 gallons per day of 24 hours. Take $f = \cdot 006$. (London Univ., 1919.)

Ans.—1.52 ft. and 1.6 ft.

(11) A cylindrical tank 16 ft. diameter discharges through a pipe 300 ft. long and 9 in. diameter. Find the time taken to lower water level in tank from 9 ft. above centre of pipe to 4 ft. above centre. $f = \cdot 01$.

Ans.—7.82 minutes.

(12) Air initially at a pressure of 60 lb. per sq. in. absolute and a temperature of 16° C. flows through a 10 in. main which is 1 mile in length. Assuming that the coefficient of resistance to flow is $\cdot 0035$, calculate the discharge in cubic feet per second, assuming that the pressure at the delivery end is to be maintained at 55 lb. per sq. in. absolute. (London Univ., 1917.)

Ans.—23.3 cu. ft. per sec.

(13) Air, initially at atmospheric pressure and 60° F., flows under a pressure difference of 10 in. of water through a 12 in. main 1,000 yds. long. Assuming that the coefficient of resistance to flow f is $\cdot 004$, determine the number of cubic feet of air delivered per second. (London Univ., 1915.)

Ans.—24.2 cu. ft. per sec.

(14) In a water-power scheme, the total head is 503 ft., and 1,750,000 gallons of water are available per hour for utilization in an impulse turbine of the Pelton type. The proposed pipe line is 2 miles long.

Determine the diameter of the pipe necessary in order that the efficiency of transmission should be 80 per cent, and also calculate the horse-power available.

If the power is supplied to the Pelton wheel through two nozzles, determine their diameter.

Neglect the losses at inlet to the pipe and at the nozzles. $f = \cdot 0075$. (London Univ., 1921.)

Ans.—3.44 ft.; 3,550; $\cdot 555$ ft.

(15) In hydraulic transmission of power, state the losses which occur, and explain how they may be minimized. 100 h.p. is to be transmitted, the pressure at the inlet of the pipe being 1,000 lb. per sq. in. If the pressure drop per mile is to be 10 lb. per sq. in., and if $f = .006$, find the diameter of the pipe and the efficiency of transmission for 10 miles. (London Univ., 1913.)

Ans.—Efficiency = 90 per cent ; 477 ft.

(16) What is meant by “critical velocity” in fluid motion? State what factors in general have an effect on the value of this. (A.M.I. Mech. E., 1922.)

(17) The resistance to the motion, in the direction of its plane, of a thin flat body through water is proportional to v^2 , and, at 10 ft. per sec., is 5 lb. per sq. ft. Determine the horse-power required to rotate at 1,200 r.p.m. a submerged disc 2 ft. in diameter. (A.M.I. Mech. E., 1922.)

Ans.—45.4.

(18) Determine the levels of the hydraulic gradient at the points B , C , and D of a pipe-line discharging 12 cu. ft. per sec. The initial level of the gradient at A is 400 ft. above datum. AB is 24 in. diameter and 5,000 ft. long; BC is 18 in. diameter and 4,000 ft. long, and CD is 20 in. diameter and 3,000 ft. long. Short taper pipes are introduced at B and C . $f = .01$. (A.M.I. Civil E., 1921.)

Ans.—377.4 ft. ; 300.7 ft. ; 286.5 ft.

(19) Reservoir A at an elevation of 900 ft. supplies water to reservoirs B and C at levels respectively of 600 ft. and 500 ft. From A to D both supplies pass through a common pipe 12 in. diameter and 10 miles long; the branch D to B is 9 in. diameter and 8 miles long, and that from D to C is 6 in. diameter and 5 miles long. How many cubic feet per second will be delivered to B and C ? $f = .01$. (A.M.I. Civil E., 1921.)

Ans.—1.00 cu. ft. per sec ; .7 cu. ft. per sec.

(20) The reservoir from which a Pelton wheel is supplied has an elevation of 1,050 ft. The pipe line is 18 in. diameter and 9,660 ft. long; it terminates at a level of 50 ft. in a nozzle which gives a jet with an effective diameter of 3 in. Taking for the nozzle $C_p = .97$, and for the pipe $f = .006$, determine the horse-power of the jet. (A.M.I. Civil E., 1922.)

Ans.—970.

(21) Two pipe lines of equal length (10,000 ft.) are laid in parallel between two reservoirs whose difference of level is 50 ft. If their diameters are respectively 12 in. and 24 in., and if the frictional resistance is given by $h = \frac{f l v^{1.8}}{d^{1.2}}$, what will be the total discharge? Take $f = .005$. (A.M. Inst. C.E. 1926.)

Ans.—5.8 cu. ft. per sec.

(22) A 6-in. pipe line 10,000 ft. long is supplied with water at 1,200 lb per sq. in. pressure. The coefficient f in the formula $h = \frac{f l v^2}{2g m}$ is 0.01. What is the maximum rate, in horse-power, at which energy can be delivered at the outlet from the pipe line? (A.M. Inst. C.E., 1926.)

Ans.—311 h.p.

HYDRAULICS

(23) A thin flat disc enclosed in a casing containing water is to be used as a hydraulic dynamometer for absorbing and measuring the output from a petrol engine running at 1,800 revs. per min. Experiments on a similar type of surface show that its frictional resistance per square foot is equal to $0.005 v^2$ lb., where v is the velocity in feet per second. What diameter of disc will be necessary if the engine develops 50 b.h.p. ? (A.M.I. Mech. E., 1926.)

Ans.—1.6 ft.

(24) The loss of head in a given pipe line is proportional to v . The following are corresponding experimental values of h and of v —

h	1.5	4.5	8.0	12.0
v	2.0	3.5	4.8	6.0

What is the value of n ? (A.M.I. Mech. E., 1926.)

Ans.— $n = 1.97$.

(25) What is meant by “critical velocity” in pipe flow ? Describe how you could determine, experimentally, the value of the lower critical velocity. (A.M. Inst. C.E., 1926.)

(26) Two reservoirs whose surface levels differ by 100 ft. are connected by a pipe 2 ft. diameter and 10,000 ft. long. The pipe line crosses a ridge whose summit is 30 ft. above the level of, and 1,000 ft. distant from, the higher reservoir. Find the minimum depth below the ridge at which the pipe must be laid if the absolute pressure in the pipe is not to fall below 10 ft. of water, and calculate the discharge in cubic feet per second. ($f = .0075$.) (London Univ., 1923.)

Ans.—16.66 ft. ; 20.5 cu. ft. per sec.

CHAPTER VII

FLOW THROUGH OPEN CHANNELS

69. Open Channels. The term "open channel" applies to any passage through which water is flowing when the free surface of the water is in contact with the atmosphere. The water is then under atmospheric pressure throughout. The channel may be covered in at the top or open; if covered in, it must not be running full, otherwise the pressure might rise above or fall below atmospheric. A pipe which is not running full may be classed as an open channel. An open channel may be of uniform cross section, as a canal, sewer, and aqueduct or it may be of an irregular cross section, such as a river.

Water flowing through an open channel is subjected to a frictional resistance at the wetted surface of the channel which obeys the same laws as stated in the previous chapter. As the pressure throughout is atmospheric, the head causing flow will be due entirely to the slope of the channel. In channels of regular cross section the velocity of flow is constant; therefore, the head due to the slope of channel may be assumed to be lost in overcoming the frictional resistance of the sides.

The velocity of flow will vary at different points of the cross-section of the channel, being smaller towards the sides. All calculations on the flow through channels are based on the mean velocity of flow at any cross section.

70. Formula for Flow in Open Channels. An equation for the flow of water through an open channel may be deduced in a similar manner as for the flow in pipes. In an open channel the pressure is atmospheric and may, therefore, be neglected; the head due to the slope of the pipe is assumed to be lost in friction. Hence the hydraulic gradient is equal to the slope of the channel if the latter is uniform.

- Let i = slope of channel
 A = area of cross section of channel
 P = wetted perimeter
 v = mean velocity of flow
 h_f = head lost in friction
 f' = coefficient of friction between water and sides
of channel for unit velocity.

Consider a section of the water of length l moving along the channel (Fig. 69). Assume slope of channel is uniform; it will therefore equal i .

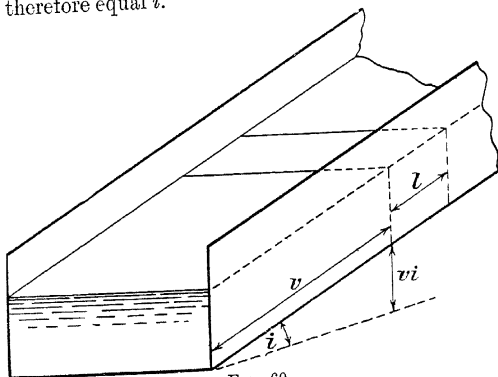


FIG. 69

$$\begin{aligned} \text{Frictional resistance of section} &= f' \times \text{wetted area} \times (\text{velocity})^n \\ &= f' Plv^n \end{aligned}$$

$$\begin{aligned} \text{Work done per second in over-} & \\ \text{coming friction} &= f' Plv^n \times v \end{aligned}$$

$$\begin{aligned} \text{Loss of potential energy per sec.} &= \text{Weight} \times \text{change of altitude} \\ &= wAl \times vi \end{aligned}$$

$$\begin{aligned} \text{But, potential energy lost} &= \text{work done against friction} \\ \text{Therefore, } wAl vi &= f' Plv^n v \end{aligned}$$

$$wi = f' v^n \frac{P}{A}$$

Assuming $n = 2$ and substituting the hydraulic mean depth m for $\frac{A}{P}$,

$$i = \frac{f' v^2}{wm}$$

$$\begin{aligned} \text{Or, } v &= \sqrt{\frac{w}{f'}} m i \\ &= C \sqrt{m i} \end{aligned} \quad (1)$$

where $C = \sqrt{\frac{w}{f'}}$ and is a constant depending on the shape and surface of the channel, and is determined experimentally.*

* Actually C will vary with the temperature, the velocity, and the size of the channel, as shown in Chapter XII on Viscous Flow.

Equation (1) is known as the Chezy formula. It was deduced by him empirically and is the same form as used for the flow through pipes.

From the results of experiments on the flow of water through channels, Bazin deduced the following formula for the value of C —

$$C = \frac{157.5}{1 + \frac{k}{\sqrt{m}}} \text{ foot units,}$$

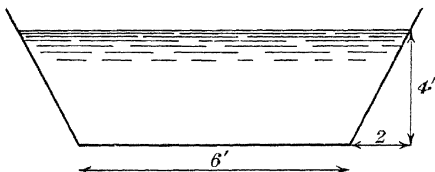


FIG. 70

where k is a constant depending on the surface of the channel and has the following values—

Clean smooth sides of wood, brick, stone, etc. $k = .29$

Dirty sides of wood, brick, stone, etc. $k = .5$

Sides of natural earth $k = 2.35$

EXAMPLE 1.

A trapezoidal channel, having sides of smooth stone, has a base of 6 ft. and side slopes of 2 vertical to 1 horizontal. The depth of water in the channel is 4 ft. Find the quantity of water flowing if the slope of the channel is 10 ft. per mile.

The section of channel is shown in Fig. 70.

Area of section = 32 sq. ft.

Wetted perimeter = $6 + 2\sqrt{4^2 + 2^2}$

= 14.94

$$m = \frac{A}{P} = \frac{32}{14.94} = 2.14$$

Using Bazin's formula for C ,

$$\begin{aligned} C &= \frac{157.5}{1 + \frac{1}{\sqrt{m}}} \\ &= \frac{157.5}{1 + \frac{.29}{\sqrt{2.14}}} \\ &= 131.5 \end{aligned}$$

Using the Chezy formula,

$$\begin{aligned} v &= C \sqrt{mi} \\ &= 131.5 \sqrt{2.14 \times \frac{10}{5280}} \\ &= 8.35 \text{ ft. per sec.} \end{aligned}$$

$$\begin{aligned} \text{Quantity} &= A \times v \\ &= 32 \times 8.35 \\ &= 268 \text{ cu. ft. per sec.} \end{aligned}$$




FIG. 71

EXAMPLE 2.

Find the depth of flow in a circular sewer 3 ft. diameter, having a fall of 1 in 200, when the discharge is 3,500 gallons per minute. Take $v = 100\sqrt{mi}$, and solve by plotting. (London Univ., 1919.)

Assume the water level to be at a height d (Fig. 71). Let r be the radius of the sewer, and θ be half the angle subtended at the centre by the water level.

From Fig. 71,

$$\cos \theta = \frac{r-d}{r}$$

in which the angle θ may be obtained in radians.

$$\begin{aligned} \text{Area of wetted cross-section} &= A = \frac{r^2 2\theta}{2} - r^2 \sin \theta \cos \theta \\ &= r^2 \left(\theta - \frac{\sin 2\theta}{2} \right) \end{aligned}$$

Wetted perimeter = $P = r2\theta$

$$m = \bar{P}$$

$$v = 100 \sqrt{m \times \frac{1}{200}} \text{ ft. per sec.}$$

Quantity = $Av \times 6.24 \times 60$ gallons per min.

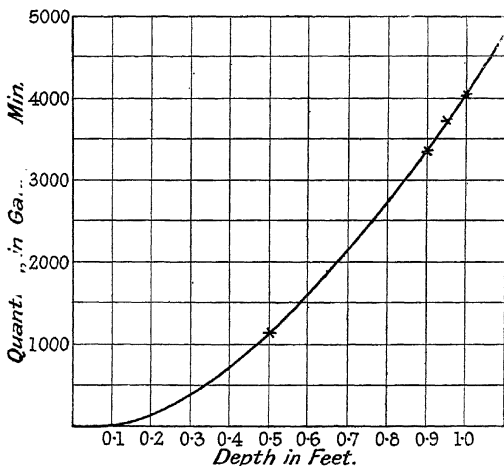


FIG. 72

These quantities are shown tabulated in the following table for assumed values of d —

d	$\cos \theta$	θ in rads	A	P	m	v	Q
.5	.666	.841	.775	2.523	.307	3.92	1137
.9	.4	1.157	1.778	3.471	.512	5.06	3380
1.0	.333	1.225	2.04	3.675	.555	5.26	4020
.95	.3665	1.195	1.92	3.585	.535	5.17	3718

d and Q are shown plotted in Fig. 72, and a curve is drawn through the points. From this curve the depth to give a discharge of 3,500 gallons per minute may be obtained.

Required depth = .925 ft.

72. Trapezoidal Channel : Condition for most Economical Section. The most economical section for a trapezoidal channel will be when the discharge is a maximum for a given excavation. The condition for this may be found, as in the previous case, by assuming the area to be a constant.

Consider the trapezoidal channel of Fig. 74. Let b be the breadth of the base, d be the depth of water, and let the slope of the sides be $\frac{1}{n}$; then the horizontal projection of the wetted side is nd .

$$\text{Discharge} = A \times v$$

$$= A \times C \sqrt{\frac{A}{P}} i,$$

and will be a maximum when P is a minimum for the given channel.

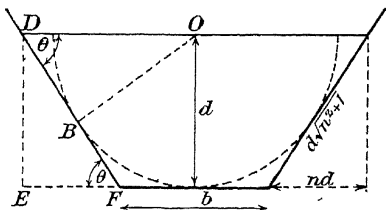


FIG. 74

$$A = (b + nd)d \quad . \quad . \quad . \quad . \quad . \quad (1)$$

Therefore, $b = \frac{A}{d} - nd$. (2)

$$\begin{aligned}\text{Length of sloping side} &= \sqrt{n^2 d^2 + d^2} \\ &= d\sqrt{n^2 + 1}\end{aligned}$$

$$P = b + 2d \sqrt{n^2 + 1}$$

Substituting for b from Equation (2),

$$P = \frac{A}{d} - nd + 2d \sqrt{n^2 + 1}$$

Differentiating P and equating to zero for a minimum,

$$\frac{dP}{dd} = -\frac{A}{d^2} - n + 2\sqrt{n^2 + 1} = 0$$

Therefore, $\frac{A}{d^2} + n = 2\sqrt{n^2 + 1}$

Substituting for A from Equation 1,

$$\frac{b + nd}{d} + n = 2\sqrt{n^2 + 1}$$

$$\text{Or, } \frac{b + 2nd}{2} = d \sqrt{n^2 + 1} \quad . \quad . \quad . \quad (3)$$

Let θ be angle of slope of sides to horizontal. Let O be the centre of water surface. From O draw OB to meet a sloping side at B and perpendicular to it.

Consider triangle ODB ,

$$\text{angle } ODB = \theta$$

$$\text{then,} \quad \sin \theta = \frac{OB}{OD} = \frac{OB}{\frac{b}{2} + nd}$$

Consider triangle DEF

$$\text{angle } DFE = \theta$$

$$\text{then,} \quad \sin \theta = \frac{ED}{DF} = \frac{d}{d\sqrt{n^2 + 1}}$$

Equating these two values of $\sin \theta$,

$$\frac{OB}{\frac{b}{2} + nd} = \frac{d}{d\sqrt{n^2 + 1}}$$

It will be seen from Equation (3) that these two denominators are equal.

$$\text{Therefore,} \quad OB = d$$

That is, if a semicircle is drawn with centre at O and of radius d , the three sides of the section will be tangential to it.

Therefore, the most economical trapezoidal section is when the three sides are tangential to a semicircle described on the water line.

As triangle ODB is similar to triangle DFE , it follows that

$$OD = DF$$

$$\begin{aligned} \text{Now,} \quad m &= \frac{A}{P} = \frac{\left(OD + \frac{b}{2}\right)d}{2DF + b} \\ &= \frac{\left(OD + \frac{b}{2}\right)d}{\left(2OD + \frac{b}{2}\right)} \\ &= \frac{d}{2} \end{aligned}$$

This is another condition for maximum discharge which will be found useful for the solution of problems of this nature.

EXAMPLE.

A trapezoidal channel is to be designed for conveying 10,000 cu. ft. of water per minute. Determine the cross-sectional dimensions of the channel from the following data—

Slope 1 in 1,600; sides inclined 45° ; cross section to be a minimum :
 $v = 90 \sqrt{m i}$. (London Univ., 1921.)

Using Equation (3) and putting $n = 1$,

$$\frac{b + 2d}{2} = d \sqrt{1 + 1}$$

From which, $b = .828d$

$$\begin{aligned} \text{Area of section} &= A = (b + d)d \\ &= (.828d + d)d \\ &= 1.828d^2 \end{aligned}$$

$$\begin{aligned} \text{Wetted perimeter} &= P = b + 2\sqrt{2}d \\ &= .828d + 2.828d \\ &= 3.656d \end{aligned}$$

$$\begin{aligned} m &= \frac{A}{P} = \frac{1.828d^2}{3.656d} \\ &= .5d \end{aligned}$$

$$\begin{aligned} \text{Quantity per second} &= A \times v \\ &= A \times 90 \sqrt{m i} \end{aligned}$$

$$\text{Therefore, } \frac{10,000}{60} = 1.828d^2 \times 90 \sqrt{.5d \times \frac{1}{1600}}$$

Squaring both sides and simplifying,

$$1.026 = d^4 \times .0003125d$$

$$\text{Hence, } d^5 = 3280$$

$$\text{And, } d = 5.04 \text{ ft.}$$

$$\begin{aligned} b &= .828d \\ &= 4.17 \text{ ft.} \end{aligned}$$

73. Circular Section : Depth for Maximum Velocity. The velocity of flow in a given circular channel will depend upon the depth of the water. As the velocity is proportional to the hydraulic mean depth, its maximum value may be obtained by differentiating $\frac{A}{P}$ and equating to zero.

Consider the circular channel of Fig. 71.

Let d = depth of water for maximum velocity

$\theta = \frac{1}{2}$ angle subtended at centre by water line, in radians

and r = radius of channel section.

Then,

area of wetted section = A = area of sector - area of triangle

$$= r^2\theta - r^2 \frac{\sin 2\theta}{2}$$

$$= r^2 \left(\theta - \frac{\sin 2\theta}{2} \right)$$

Wetted perimeter = $P = 2r\theta$

And, $m = \frac{A}{P}$

As $v = C \sqrt{mi}$,

v = maximum when m is a maximum. That is, when $\frac{A}{P}$ is a maximum.

Differentiating $\frac{A}{P}$ and equating to zero,

$$\frac{d\left(\frac{A}{P}\right)}{d\theta} = P \frac{dA}{d\theta} - A \frac{dP}{d\theta} = 0$$

From which, $Pr^2(1 - \cos 2\theta) - A \cdot 2r = 0$

Substituting for P and A ,

$$2r^3\theta(1 - \cos 2\theta) = 2r^3 \left(\theta - \frac{\sin 2\theta}{2} \right)$$

Therefore, $2\theta = \tan 2\theta$

The solution of which is when $2\theta = 257\frac{1}{2}^\circ$

$$d = r - r \cos \theta$$

For maximum velocity, $d = r - r \cos \frac{257\frac{1}{2}}{2}$

$$= r(1 + .62)$$

$$= 1.62r$$

Or,

depth for maximum velocity = $.81 \times$ diameter of channel.

74. Circular Section : Depth for Maximum Discharge.

Referring to Fig. 71, and using the same notation as in Art. 73,

$$\begin{aligned}\text{discharge} &= A \times C \sqrt{mi} \\ &= A \times C \sqrt{\frac{A}{P}} i \\ &= C \sqrt{\frac{A^3}{P}} i\end{aligned}$$

Therefore, discharge is a maximum when $\frac{A^3}{P}$ is a maximum.

$$\frac{d\left(\frac{A^3}{P}\right)}{d\theta} = \left(P \cdot 3 A^2 \frac{dA}{d\theta} - A^3 \frac{dP}{d\theta}\right) \times \frac{1}{P^2} = 0$$

From which, $3 P \frac{dA}{d\theta} - A \frac{dP}{d\theta} = 0$

$$6r^3\theta(1 - \cos 2\theta) - 2r^3\left(\theta - \frac{\sin 2\theta}{2}\right) = 0$$

$$3\theta(1 - \cos 2\theta) = \theta - \frac{\sin 2\theta}{2}$$

Or, $4\theta - 6\theta \cos 2\theta = -\sin 2\theta$

The solution of this equation is $\theta = 154^\circ$

Then, for maximum discharge, $d = r - r \cos \theta$
 $= r(1 + .9)$
 $= 1.9r$

Or, depth for maximum discharge = $.95 \times$ diameter.

EXAMPLE.

Find, either graphically or by calculation, the depth for the maximum discharge for a circular culvert.

Find the depth of water for maximum velocity along a 6 ft. diameter culvert. (London Univ., 1914.)

The depth for maximum discharge may be found by the above method ; or, it may be found by plotting as was done in Example (2), Art. 70.

Depth for maximum velocity may be found from the equation of Art. 73—

$$\begin{aligned}\text{depth} &= .81 \times \text{diameter} \\ &= .81 \times 6 = 4.86 \text{ ft.}\end{aligned}$$

75. Variation of Velocity over Cross-section of a Channel.

The velocity of flow varies at different points of the cross

section of the channel. The frictional resistance of the sides causes the water to slow down towards the sides of the channel, and the frictional resistance between the water surface and the atmosphere causes a slight reduction of velocity at the free

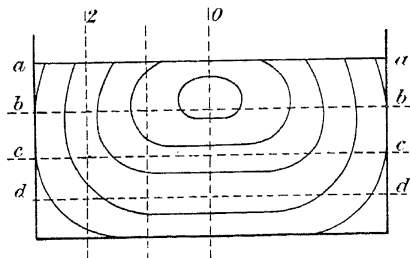


FIG. 75

surface. The maximum velocity will be on the vertical centre line of the channel at a point a little below the free surface.

The variation of velocity over the cross-section of a rectangular channel is shown in Fig. 75. The curves shown are lines of equal velocity; they have the greatest value at the centre, just below the water surface, and decrease towards the sides and base. In Fig. 76 are shown the variations of velocity on horizontal section lines taken at different depths. The

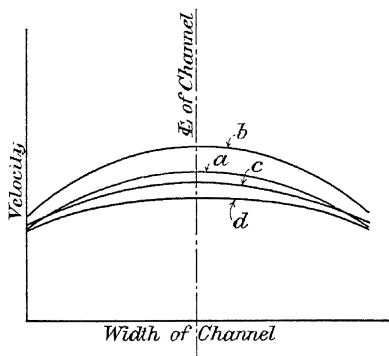


FIG. 76

velocities at different points of the section lines *a*, *b*, *c*, and *d* (Fig. 75) are plotted on a base representing the width of the channel.

Fig. 77 shows the variation of velocity on the vertical section lines 0, 1, and 2 (Fig. 75). The horizontal ordinate represents the velocity and the vertical ordinate the depth.

The mean velocity on any vertical section approximately occurs at .6 of the depth; it varies with the type of channel

and with the nature of the sides. The discharge of the whole channel may be obtained by dividing the section into vertical rectangles and finding the mean velocity of each rectangle. Using this mean velocity, the discharge through each rectangle may be obtained. The sum of all these discharges will be the total discharge of the channel.

For a quick approximation, the mean velocity of each rectangular strip may be taken as the velocity at a depth of $\cdot 6$ of the total depth.

76. Measurement of Flow of Irregular Channels. By the term "irregular channels" is included large rivers and small streams. The quantity of flow of a small stream may be obtained by fitting a notch or weir across the stream; the discharge may then be calculated by measuring the head over the notch. This method could not be used for a large river on account of the expense and of the obstruction to navigation it would cause. In this case it is necessary to measure the cross-section of the river, and to measure the velocity of flow at various points of this cross-section.




FIG. 77

Let Fig. 78 represent the cross-section of the river at the point chosen. This should be on a straight uniform portion of the river. The cross section is then divided into vertical rectangles as shown, and the mean velocity of each rectangle




FIG. 78

found. This can be obtained approximately by assuming the mean velocity to occur at $\cdot 6$ of the depth and measuring the velocity at that point, or it may be found more accurately by measuring the velocity at several depths and calculating the mean from these measurements. The discharge through each

rectangle may then be obtained by multiplying the area by the mean velocity. Then, by adding together the discharge of each rectangle the total flow of the river is obtained.

The velocity of flow may be measured by the following methods—

(a) **PITOT TUBE.** The Pitot tube is held with the orifice facing up stream at the place at which the velocity is required. The velocity is then obtained by the method given in Art. 29.

(b) **CURRENT METER.** A type of current meter is shown in Fig. 79. It consists of a wheel containing blades or cups,

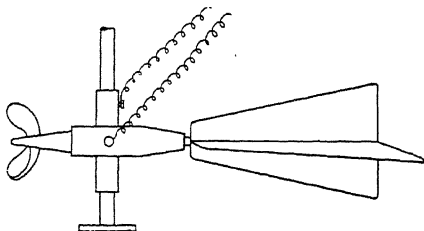


FIG. 79

which are rotated by the flowing water; these are headed towards the current by means of a tail on which vanes or fins are fixed. An electric current is passed to the wheel from a battery above the water by means of wires, and a commutator is fixed to the shaft of the revolving blades which makes and breaks the electric circuit each revolution. A revolution counter above the water is worked by this electric current. The meter is lowered into the water at the required point, and the velocity obtained from the revolution counter.

The Amsler Current Meter* is shown in Figs. 79A and 79B; this is a universal instrument suitable for both measurements in very slow running waters and yet strong enough for use in great velocities. The propeller is of a strictly helical shape; it is made of one single piece of hard and very resistant aluminium. There is no friction between the axis of the propeller and the electric contact. The shaft of the propeller runs on the one side in a ball bearing and on the other in a sapphire bearing, ensuring smooth running and consequently great accuracy of results, even when using the current meter for slow speeds. The current meter commences rotating at a speed of 1 in. per sec.

* By courtesy of Messrs. Amsler & Co., Schaffhouse, Switzerland.

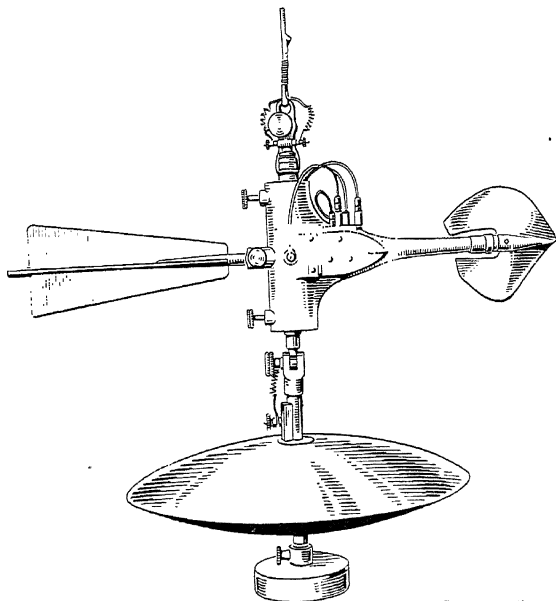


FIG. 79A.—AMSLER CURRENT METER WITH UNIVERSAL JOINT, WEIGHT, AND GROUND SINKER

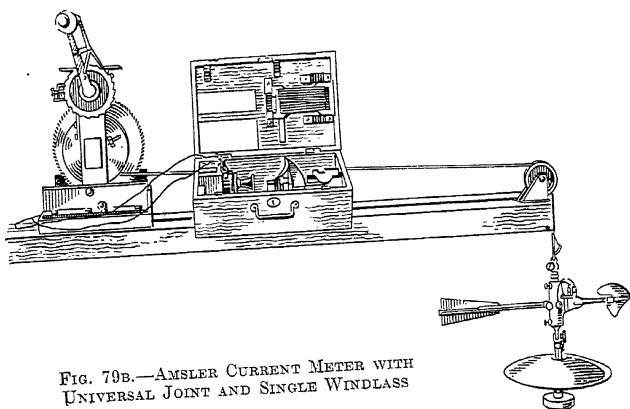


FIG. 79B.—AMSLER CURRENT METER WITH UNIVERSAL JOINT AND SINGLE WINDLASS

The contact for transmitting the rotation of the propeller to the electric bell inside the casing of the current meter is arranged in a watertight chamber, thus preventing any corrosive and electrolytic influence of the water, especially sea water or acidulated water. The instrument can be taken to pieces quickly and conveniently without any tools. The ball bearings remain fast to their axis and cannot therefore be lost.

This current meter can also be provided with an additional contact for single revolutions of the propeller and with an observation telephone. At every revolution of the propeller a crack is then heard in the telephone. If the propeller turns backward, as may be the case in whirlpools or backwater, a double crack is heard at every revolution. By means of this telephone it is possible to ascertain whether the propeller turns regularly, forwards or backwards, and also to count directly the number of revolutions of propeller for a certain interval of time if the water flows very slowly. The instrument makes contact at every fifty revolutions of the propeller. The two terminals on the instrument casing are connected, by means of a double wire, with the electric bell and the battery, which are located in the instrument case.

(c) FLOATS. A simple way of measuring the velocity of flow of a river is by means of floats. The surface velocity at any section may be obtained by a single float. The time taken for the float to traverse a known distance is measured and the velocity calculated. A single float gives the surface velocity only, and is affected by the wind and air resistance.

A better method is to use double floats. A double float consists of a surface float on to which is attached a hollow metal sphere, heavier than water, and suspended from it by a cord of known length. (Fig. 80.) The depth of the lower float may be regulated by the length of the cord. The velocity is then obtained by timing the top float over a known distance. This gives the mean between the velocity of the surface and the velocity of the layer traversed by the lower float.

The best type is the rod float. This consists of a vertical wooden rod which is weighted at the bottom to keep it vertical. The rod will travel with a velocity equal to the mean velocity of the section. It should be as long as the depth of the river will permit, and the top should be made conspicuous by painting it white. Some types of rods are made telescopic, so that the length may be adjusted to suit any depth.

Weeds at the bottom of a river will interfere with the use of a rod or double float. If possible, a section of the river which is free from weeds should be chosen.

(d) CHEMICAL METHOD. Another method for finding the discharge of an irregular channel is by inserting a chemical solution of known weight and strength uniformly at a certain section. Then, by finding the strength of the solution at another section lower down the stream, the discharge may be calculated. A solution must be chosen which readily mixes with water; for this reason, and on account of cheapness, common salt is generally used. Great care must be taken with

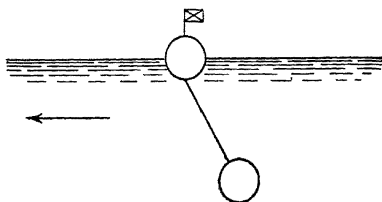


FIG. 80

this method, a uniform stretch of channel should be used, and the solution should be inserted at several places over the cross-section.

At a section of the stream, sufficiently below the inserting section for the solution to have mixed evenly with the stream, samples of the stream are taken at various points, from which the weight of salt per cubic foot of water is measured.

Let Q = discharge of stream in cu. ft. per sec.

q = quantity of solution injected in cu. ft. per sec.

W = weight of salt per cu. ft. of stream water at lower section.

w = weight of salt per cu. ft. of solution injected.

Then, as the weight of salt injected per second must equal the weight per second passing the lower section of stream,

$$q w = Q W$$

From which,
$$Q = \frac{q w}{W}$$

This method is very unreliable unless the water is well mixed before reaching the lower section at which the samples are taken. The average results from all the samples must be used.

77. River Bends. It is known from experience that a river flowing round a bend scours the bank on the outside of the bend, and material is deposited on the inside. This means that the bend is continually increasing, and eventually the river breaks through the narrow neck thus formed and makes an island of the land which previously formed the inside of the bend. After a time the main water course will be through the breach and the bent channel will be partly silted up, until finally it becomes a horse-shoe lake. These horse-shoe lakes are frequently found at the sides of rivers.




FIG. 81

The scouring of the outside of a river bend is mainly due to the impact of the water as it strikes the bank. Another explanation is given by Lord Kelvin, who accounts for it by the action of a transverse current which flows along the bottom of the river from the outside of the bend to the inside, as shown in Fig. 81. Owing to the centrifugal force the pressure of the water on the outside of the bend will increase; but as the water near the surface has a greater velocity than that near the bottom, the pressure at the surface will be greater than that at the bottom. This will cause the water to flow downwards and form a cross current which will transport material from the outside of the bend to the inside. This explanation may be the cause of some of the silting, but the main quantity is probably due to impact on the outside of the bend and to still water at the inside.

78. Water Supply and Rainfall. The water supply for a district is usually obtained by building a dam across certain water-courses, such as mountain streams. As this stops the flow of the stream, the inhabitants of the land below the dam, who were formerly supplied with water by the stream, must be compensated by a daily supply of water from the dam.

Such water is known as compensation water, and the quantity is fixed by law to be one-third of the total amount collected by the dam. As the greater part of this compensation water must be supplied in the day time, it is usual to have a special reservoir for it, so that the claimants may use it as they wish.

In supplying the population of a district with water, the following considerations are necessary—

- (1) Rainfall.
- (2) Amount lost by evaporation, absorption, and percolation.
- (3) Maximum period in which available supply falls short of demand.

The rainfall of a district is measured with a rain gauge, such as shown in Fig. 82, and is averaged over several years. The following list gives the average rainfall, of a few districts—

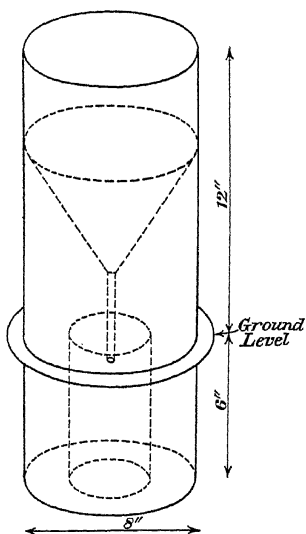


FIG. 82

Scathwaite	136 in. per year
Keswick	60 " "
Buxton	54 " "
Midlands	25 " "
London	25 " "
Manchester	37.4 " "

The water supply is reckoned on the three consecutive driest years, and the following rules are used—

- (1) The wettest year has a rainfall of $1\frac{1}{2}$ times the mean rainfall.
- (2) The driest year has $\frac{2}{3}$ the mean rainfall.
- (3) The driest two consecutive years have $\frac{3}{4}$ of mean rainfall per year.
- (4) The driest three consecutive years have $\frac{4}{5}$ of mean rainfall per year.

It is usual to work on the last of these rules.

Some of the rainfall is lost by evaporation, absorption, and percolation, the amount depending on the nature of the ground on which the rain falls. The following table will give an idea of the amounts lost by these causes—

Rainfall.	Percolation.		Evaporation.		
	Soil.	Sand.	Soil.	Sand.	Water.
in. 25·7	in. 7·6	in. 21·4	in. 18·1	in. 4·3	in. 20·6

The average loss from these causes may be taken as from 10 to 20 in. of the annual rainfall.

Reservoirs are built in which the water is stored. The amount stored should be equal to about 150 days' supply. In towns, small reservoirs, known as service reservoirs, are built for district supply.

The total amount of water required to be stored for the whole water supply is given by the following empirical rule—

$$N = \frac{1000}{\sqrt{h}}$$

where N = number of days' supply to be stored

and h = inches of rainfall in three consecutive dry years.

The demand for the water is not regular, and it is found that one-half of the amount used daily will be drawn off in 6 hours. That is, the maximum rate of flow is 100 per cent more than the average rate. This must be taken into account in designing the supply pipes.

The amount of water consumed varies in different districts. The following figures are an average of the amounts supplied—

Domestic supply :

17 gallons per day per head in towns.

12 gallons per day per head in rural districts.

Trade supply :

5 to 20 gallons per day per head.

The following gives the quantities of water supplied per day for several large towns—

Philadelphia . . .	215	gallons per head
Glasgow	52	" " "
Perth	50	" " "
Manchester . . .	27	" " "
Liverpool	25	" " "
Leicester.	16	" " "

These figures include the consumption for trade, domestic, municipal, and leakage. The large variation is probably due to trade consumption and leakage. For an average, a total consumption of 30 gallons per head per day may be used.

EXAMPLE.

The average rainfall over a catchment area of 1,680 acres, as determined for a period of 35 years, is 36.6 in. per annum. Assuming that there is a possibility of three consecutive dry years, during which the average rainfall is only 80 per cent of the above average, and assuming that the evaporation loss in such dry years is equivalent to 15 in. of rainfall per annum, determine in gallons the minimum annual yield from this catchment area.

If one-third of this yield has to be supplied for compensation water, what population could be supplied from this catchment area, if the daily supply is 48 gallons per head? (London Univ., 1915.)

$$\text{Minimum average rainfall} = 36.6 \times \frac{80}{100} = 29.25 \text{ in.}$$

$$\begin{aligned} \text{Deducting loss due to evaporation,} \\ \text{collectable rainfall} &= 29.25 - 15.0 = 14.25 \text{ in.} \end{aligned}$$

$$\begin{aligned} \text{Volume of rain collected} \\ \text{per annum} &= \text{area} \times \text{depth} \\ &= 1680 \times 4840 \times 9 \times \frac{14.25}{12} \\ &= 86,800,000 \text{ cu. ft.} \\ &= 542,000,000 \text{ gallons.} \end{aligned}$$

$$\begin{aligned} \text{Deducting one-third for compensation water,} \\ \text{actual amount available} \\ \text{per annum} &= 542,000,000 \times \frac{2}{3} \\ &= 361,000,000 \text{ gallons} \end{aligned}$$

$$\begin{aligned} \text{Population supplied} &= \frac{361,000,000}{48 \times 365} \\ &= 20,600 \end{aligned}$$

EXAMPLES 7.

- (1) Using Bazin's formula $C = \frac{157.5}{1 + \frac{k}{\sqrt{m}}}$, find the value of C for a broad

shallow river of 2 ft. deep. (Take wetted perimeter as breadth of river.)

Ans.—59.2.

- (2) A channel 10 ft. wide at the bottom and with sides sloping 1 to 1, has a slope of 3 ft. per mile. What would be the discharge if the water is 4 ft. deep in the channel and $C = 95$ in the equation $v = C \sqrt{mi}$. (London Univ., 1920.)

Ans.—205.5 cu. ft. per sec.

- (3) Find the maximum discharge for least excavation of a rectangular channel 10 ft. wide, when $C = 105$ and slope = 1 in 1,000.

Ans.—262.5 cu. ft. per sec.

- (4) Explain what is meant by the "best cross-section" for a channel, and how it is determined.

A channel with side slopes at 45° is to have a cross-section of 120 sq. ft. Determine the dimensions for the best section. (London Univ., 1913.)

Ans.—Depth = 8.1 ft. Base = 6.7 ft.

- (5) Deduce the formula for the depth of water in a circular conduit for maximum discharge.

Find the depth for maximum discharge in a circular brick sewer 4 ft. diameter. (London Univ., 1912.)

Ans.—3.8 ft.

- (6) Describe the construction and use of a current meter for measuring the velocity of flow of a stream, and explain how you would proceed to determine by its aid the discharge of a stream of moderate width. (London Univ., 1913.)

- (7) A district has a drainage area of 2,500 acres, with a population of 20 persons per acre. The daily water supply to the district is equal to 40 gallons per head. During dry weather it is found that 7 per cent of the daily dry weather flow passes along the sewer between the hours of 12 noon and 1 p.m.

Assuming a maximum rainfall of 1 in. in 24 hours over the whole area, determine the diameter of a circular sewer, having a slope of 1 in 3,000, which will take the maximum dry weather flow and the rainfall, without the sewer becoming more than half full. [Assume $C = 130$.] (London Univ., 1917.)

Ans.—8.93 ft.

- (8) Explain carefully how you would determine the discharge of a river having a width of about 150 ft. and a depth at the centre of about 15 ft. (London Univ., 1914.)

- (9) The bed of a stream has a slope of 1 in 1,000, and the depth of the water is 3 ft. A dam is to be built across the stream and provided with a sluice gate. Find the height of the dam so that the rise in level of the water, when the sluice gate is closed, may be limited to 7.5 ft. Take $C = 65$ in the formula $v = C \sqrt{mi}$, the coefficient of discharge of the dam, as a weir, .56, and assume, in calculating m , that the breadth of the stream is large in comparison with the depth. (London Univ., 1912.)

Ans.—8.17 ft. above bed of stream.

(10) A rectangular channel is 5 ft. deep and 10 ft. wide. If the value of C in Chezy's formula is 100, determine the discharge if the gradient is 1 in 1,000. (A.M.I. Mech. E., 1922.)

Ans.—250 cu. ft. per sec.

(11) Show how the basic formula for steady flow in channels of constant slope and section is derived.

The depth of water in a circular brick-lined conduit, 6 ft. in diameter, is to be 5 ft., and its capacity 50 million gallons a day. The water surface subtends an angle of $96^{\circ} 20'$ at the axis of the conduit. What must the gradient be? $C = 123$. (A.M.I. Civil E., 1921.)

Ans.— $\frac{1}{2030}$.

(12) You are required to ascertain the discharge of a river by means of current meter observations. Describe with diagrams the procedure at the site, and explain carefully how you would arrive at the discharge from your meter readings. The meter may be assumed calibrated and ready for use. (A.M.I. Civil E., 1922.)

(13) A concrete-lined channel has a bottom width of 10 ft., side slopes of 1 horizontal to 3 vertical, and a gradient of 1 in 800. When flowing 3 ft. deep, it is found to have a capacity of 220 cusecs. What is the value of C ? (A.M.I. Civil E., 1922.)

Ans.—133.

(14) A stream is 40 ft. wide at water level. At horizontal intervals of 5 ft. the following results are obtained by current meter.

Distance from bank. Ft.	0	2.5	7.5	12.5	17.5	22.5	27.5	32.5	37.5	40
Depth of water. Ft.	0	1.0	2.2	3.2	4.4	5.0	3.4	2.2	1.2	0
Mean velocity on vertical										
Ft. per sec.	—	1.5	1.9	2.2	2.9	3.3	2.7	1.8	1.4	

What is the discharge in cusecs? (A.M.I. Mech. E., 1926.)

Ans.—283.8 cusecs.

(15) Deduce the Chezy formula for uniform flow in channels. An irrigation channel has a gradient of 1 in 2,000, a bottom width of 16 ft., and side slopes of 1 vertical to 2 horizontal. If the depth of water is 4 ft. and the value of C is 90, what is the mean velocity and the capacity in cusecs? (A.M.I. Mech. E. 1926.)

Ans.— $v = 3.38$ ft. per sec.; $Q = 324$ cusecs.

(16) A brick-lined sewer has a semicircular bottom and vertical side walls 2 ft. apart. If the slope is 1 in 1,000 determine the discharge when the maximum depth of water is 3 ft. Take C in Chezy's formula as 90. (A.M.Inst. C.E., 1925.)

Ans.—14.05 cusecs.

CHAPTER VIII

RECIPROCATING PUMPS

79. Types of Reciprocating Pumps. There are two main types of pumps, centrifugal and reciprocating ; the latter type only will be dealt with in this chapter. A reciprocating pump is driven by power from an external source and consists of a cylinder in which a piston or plunger is moved backwards and forwards. This movement of the plunger creates alternately a vacuum pressure and a positive pressure in the cylinder by means of which the water is raised. If a plunger is used, or if the water acts on one side of the piston only, the pump is single acting. In this case it sucks the water into the cylinder on the outward stroke and forces it out during the inward stroke. If the water acts on both sides of the piston it will suck and deliver during one stroke ; such a pump is said to be double acting.

Pumps which raise the water by suction only are known as suction pumps. Such pumps are only suitable for low lifts, as the maximum height through which water could be lifted by this type of pump is theoretically equal to the barometer reading and actually to about 25 ft.

Pumps which lift water by means of pressure are known as force pumps.

80. Force Pump. A diagrammatic view of a force pump is shown in Fig. 83. The rotation of the crank causes the plunger *P* to move backwards and forwards in the cylinder *C*. During the suction stroke the plunger moves to the right, which causes a vacuum in the cylinder. The atmospheric pressure on the water surface forces the water up the suction pipe *S* ; this forces open the suction valve *a*, and the water enters the cylinder. On the return stroke of the plunger the water pressure closes the suction valve and opens the delivery valve *b* ; the water is then forced up the delivery pipe *D* and so raised to the required height.

The theoretical volume of water raised per revolution is equal to the stroke volume of the cylinder if the pump is single acting, and to twice this volume if double acting.

Actually, the amount lifted is less than this volume, owing to losses.

81. **Work done by Pump.** Referring to Fig. 83, let r be the radius of crank and L be the length of stroke, in feet.

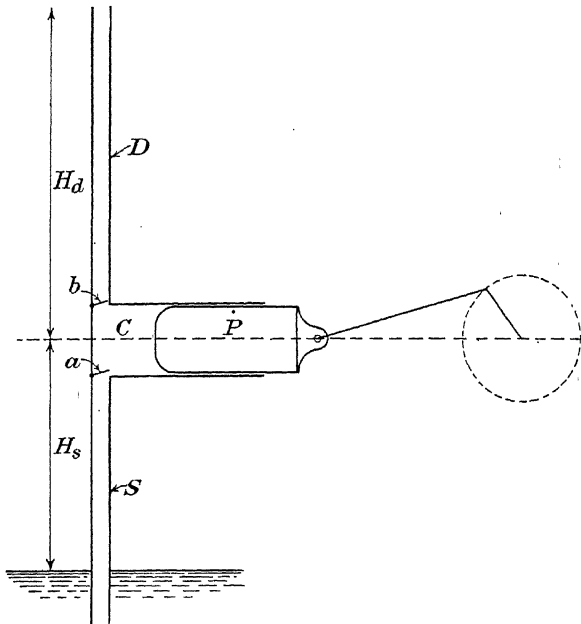


FIG. 83

Then,

$$L = 2r$$

Let A be the cross-sectional area of piston in square feet.

Then,

theoretical volume of water
pumped per stroke = AL

and,

theoretical weight of water
per stroke = wAL

Let H_s = height of centre of cylinder above water surface
and H_d = height to which water is raised above centre of
cylinder.

Then, total height lifted $= H_s + H_d$

Let v_d = velocity of water in delivery pipe

Velocity head of water leaving delivery pipe $= \frac{v_d^2}{2g}$

As v_d is usually small, it may be neglected unless the total lift is very small.

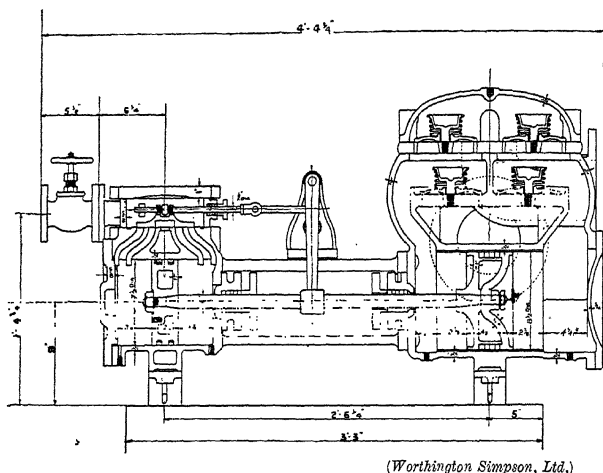


FIG. S3A.—SECTION OF HORIZONTAL DUPLEX STEAM PUMP

Let W be the weight of water per second actually lifted.

Work done $= W \left(H_s + H_d + \frac{v_d^2}{2g} \right)$ ft. lb. per sec.

Theoretical horse-power required $= \frac{W \left(H_s + H_d + \frac{v_d^2}{2g} \right)}{550}$

The actual horse-power required would be greater than this on account of frictional resistance of water and mechanical parts, and of leakage.

The ratio of the actual volume of water discharged to the

volume swept through by the plunger is called the coefficient of discharge.

$$\text{Or, coefficient of discharge} = \frac{W}{62.4 AL n}$$

where n = number of suction strokes per second.

The difference between the volume swept through by plunger and the actual discharge is called the "slip."

In the case of pumps with a long suction pipe and a low delivery, the pressure due to the inertia of the column of water in the suction pipe will be large compared with the pressure

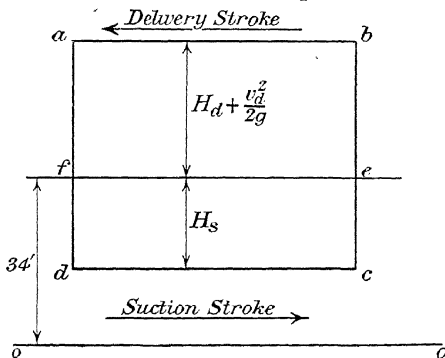


FIG. 84

on the outside of the delivery valve, especially if the speed is great. This may cause the delivery valve to open before the end of the suction stroke, and a greater volume of water will be delivered than that swept through by the plunger. This makes the theoretical discharge less than the actual; the slip will then be negative and the coefficient of discharge will be greater than unity.

A diagram showing the work done by the pump during a complete cycle is shown in Fig. 84. The diagram shows the pressure on the plunger, or on one side of the piston if double acting, plotted as the vertical ordinate, whilst the length of the stroke is represented by the horizontal ordinate. The horizontal line fe represents atmospheric pressure. The line dc is the pressure in the cylinder during the suction stroke, it being below the atmospheric line by the amount H_s . The line ab represents the pressure in the cylinder during the

delivery stroke, and is above the atmospheric line by the amount $H_a + \frac{v_d^2}{2g}$. The area $d c e f$ is the work done by the plunger on the suction stroke, and $a b e f$ is that done on the delivery stroke. Then, total work done per revolution is given by the area $a b c d$. If the pump is double acting, the work done is twice this amount.

Such a diagram may be obtained automatically by means of an indicator placed on the cylinder, and is consequently called an indicator diagram.

An actual diagram taken by an indicator would be similar to Fig. 84 if the pump were running at a low speed.

EXAMPLE.

A single acting reciprocating pump has a piston area of 1.5 sq. ft. and a stroke of 12 in. The cross-sectional area of the delivery pipe is .3 sq. ft. and the water is lifted through a total height of 40 ft. If the speed of the pump is 60 revs. per min., and the actual quantity of water lifted 550 gallons per min., find the slip, the coefficient of discharge, and the theoretical horse-power required to drive the pump.

$$\text{Volume swept through by piston} = 1.5 \times 1.0 = 1.5 \text{ cu. ft.}$$

$$\text{Theoretical volume pumped per sec.} = 1.5 \times \frac{60}{60} = 1.5 \text{ cu. ft.}$$

$$\begin{aligned} \text{Actual volume pumped per sec.} &= \frac{550}{60 \times 6.24} \\ &= 1.47 \text{ cu.-ft.} \end{aligned}$$

$$\text{Slip} = 1.5 - 1.47 = .03 \text{ cu. ft. per sec.}$$

$$= \frac{.03}{1.5} \times 100 = 2 \text{ per cent.}$$

$$\text{Coefficient of discharge} = \frac{1.47}{1.5} = 98 \text{ per cent.}$$

$$v_d = \frac{1.47}{.3} = 4.9 \text{ ft. per sec.}$$

$$\begin{aligned} \text{Total pressure head on piston} &= H_s + H_a + \frac{v_d^2}{2g} \\ &= 40 + \frac{4.9^2}{64.4} \\ &= 40.373 \text{ ft. of water.} \end{aligned}$$

$$\begin{aligned} \text{Theoretical horse-power} &= \frac{550 \times 10}{60} \times \frac{40.385}{550} \\ &= 6.73. \end{aligned}$$

82. Variation of Pressure due to Acceleration of Piston.

Owing to the reciprocating motion of the plunger or piston, it will have an acceleration at the beginning and a retardation at the end of each stroke. This will transmit a corresponding acceleration and retardation to the water in the suction and delivery pipes, the inertia of which will cause a variation of the pressure in the cylinder.

In order to simplify the problem it is usual to assume that the piston moves with simple harmonic motion. This would be the case if the connecting rod were very long compared with the length of the crank.

Consider the diagrammatic view of the crank and connecting rod of Fig. 85. Let the crank be rotating with an angular

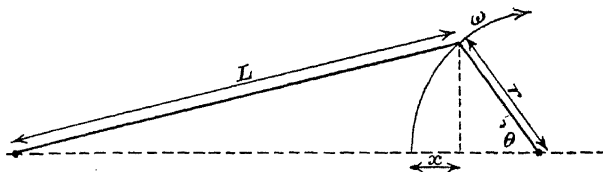


FIG. 85

velocity ω . Suppose it has turned through an angle θ in the time t sec., and assume simple harmonic motion.

Then, $\theta = \omega t$

Displacement of piston

$$\text{from end of stroke} = x = r - r \cos \omega t$$

$$\text{Velocity of piston} = v = \frac{dx}{dt} = \omega r \sin \omega t \quad (1)$$

$$\text{Acceleration of piston} = f = \frac{dv}{dt} = \omega^2 r \cos \omega t \quad (2)$$

Let A be the area of piston and a be the area of pipe. Then, as volume of water flowing from pipe per second equals volume of water flowing into cylinder per second,

$$\text{velocity of water in pipe} = \text{velocity of piston} \times \frac{A}{a}$$

$$= \frac{A}{a} \omega r \sin \omega t$$

$$= \frac{A}{a} \omega r \sin \theta \quad (3)$$

acceleration of water in
pipe

$$\begin{aligned}
 &= f \times \frac{A}{a} \\
 &= \frac{A}{a} \omega^2 r \cos \omega t \\
 &= \frac{A}{a} \omega^2 r \cos \theta \quad . \quad . \quad . \quad (4)
 \end{aligned}$$

Let l = length of pipe through which water is flowing.

Then, weight of water in pipe = $w a l$.

Let p_a = intensity of pressure due to acceleration of water in pipe.

From Newton's laws of motion,

accelerating force = mass \times acceleration

That is, $p_a a = \frac{w a l}{g} \times f \frac{A}{a}$

Or, $p_a = \frac{w l}{g} \times f \frac{A}{a}$

Let H_a = acceleration pressure in feet of water
 $= \frac{p_a}{w}$

Then, $H_a = \frac{p_a}{w} = \frac{l}{g} \times f \frac{A}{a}$

Substituting for f from Eq. 2.

$$H_a = \frac{l}{g} \times \frac{A}{a} \omega^2 r \cos \theta \quad . \quad . \quad . \quad . \quad (5)$$

The pressure head due to acceleration acting on the piston will, therefore, vary with the angle θ .

At the beginning of the stroke when $\theta = 0$, $\cos \theta = 1$

then, $H_a = \frac{l}{g} \frac{A}{a} \omega^2 r$

At the middle of the stroke when $\theta = 90$, $\cos \theta = 0$,
 then, $H_a = 0$

At the end of the stroke when $\theta = 180$, $\cos \theta = -1$

then, $H_a = -\frac{l}{g} \frac{A}{a} \omega^2 r$

If simple harmonic motion is not assumed, the acceleration of piston at dead centres $= \omega^2 r \left(1 \mp \frac{r}{L} \right)$ where L is the length of the connecting rod.* Then, at beginning of stroke,

$$H_a = \frac{l}{g} \frac{A}{a} \omega^2 r \left(1 + \frac{r}{L} \right)$$

At end of stroke,

$$H_a = \frac{l}{g} \frac{A}{a} \omega^2 r \left(1 - \frac{r}{L} \right)$$

83. The Effect of Acceleration in Suction Pipe. Consider the suction stroke of the pump of Fig. 83. As the piston moves along the cylinder it must produce a vacuum sufficient to lift the water up the height H_s , and also to accelerate the water. The vacuum pressure in the cylinder must, therefore, equal $H_s + H_a$. If this vacuum pressure reaches 26 ft. of water, that is 8 ft. absolute, the water commences to vaporize and cavities of dissolved gases and vapour are formed. This will cause the water in the pipe to separate and flow in sections; the flow is then no longer continuous and vibrations and "knocking" will occur. This phenomenon is known as separation or cavitation and must be prevented.

The suction stroke of the indicator diagram of Fig. 84 must now be modified to take into account the acceleration head.

Let l_s = length of suction pipe
and a_s = cross-sectional area of suction pipe.

$$\text{Then, } H_a = \frac{l_s}{g} \times \frac{A}{a_s} \omega^2 r \cos \theta$$

At the beginning of the suction stroke this must be added to the suction head as the piston is accelerating the water. The equation gives a straight sloping line, the accelerating head being zero at the centre of the stroke. At the end of the stroke the water causes a positive pressure on the piston in retarding, which reduces the vacuum pressure in the cylinder.

The new indicator diagram for the suction stroke is shown in Fig. 86. The acceleration head H_a is added to the vacuum head at the beginning of the stroke and subtracted at the end. The work done is now represented by the area $f m n e$; but as this equals the area $f d c e$, the net work done remains as

* See textbooks on Mechanism.

84. **The Effect of Acceleration in the Delivery Pipe.** The column of water in the delivery pipe will be accelerated at the beginning of the delivery stroke and retarded at the end, in the same way as that in the suction pipe. But, as the delivery pipe may be much longer than the suction pipe, the lift of the latter being limited to 26 ft., the accelerating head in this case may be very large.

Let l_d = length of delivery pipe

and a_d = cross-sectional area of delivery pipe.

$$\text{Then, } H_a = \frac{l_d}{g} \times \frac{A}{a_d} \omega^2 r \cos \theta$$

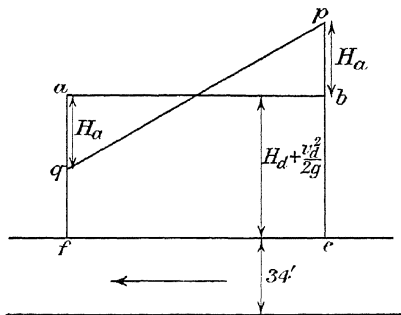


FIG. 87

In Fig. 87 the indicator diagram of the delivery stroke of Fig. 84 is shown with the acceleration head added. The work done is the area $efqp$, and is not affected by the acceleration of the water. The minimum pressure head in the cylinder is represented by the point q and equals

$$H_d + \frac{v_d^2}{2g} - H_a$$

above atmosphere. In absolute units this becomes—

$$34 + H_d + \frac{v_d^2}{2g} - H_a$$

This amount must not be less than 8 ft. of water, otherwise separation will take place at the end of the stroke. The limiting condition is, therefore, when

$$34 + H_d + \frac{v_d^2}{2g} - H_a = 8$$

Or, when

$$H_a = 26 + H_d + \frac{v_d^2}{2g}$$

If the delivery pipe of the pump is vertical, both sides of this equation will increase with the length of the pipe; in which case it is highly improbable that H_a would be greater than H_d .

Consider the delivery pipe of a pump to be bent either to the form shown in Fig. 88 or to that of Fig. 89. Let the length of pipe and height lifted be the same in both cases. The conditions at points a in both figures will be the same, there being no difference in the values of H_a and H_d in either




FIG. 88




FIG. 89

case. If separation takes place it would do so at the point b of Fig. 88; for at this point H_d is zero and there is still a considerable length of pipe beyond b which affects H_a .

EXAMPLE.

A single acting pump has a piston diameter of 6 in. and a crank radius of 1 ft. The delivery pipe is 3 in. diameter and 100 ft. long. The water is lifted 100 ft. above the centre of the pump. Find the maximum speed at which the pump may be run so that no separation takes place during the delivery stroke. Neglect the velocity head in the delivery pipe and assume separation occurs at an absolute pressure of 8 ft. of water.

Referring to Fig. 87, separation takes place when

$$H_d + 34 - H_a = 8$$

or,

$$\begin{aligned} H_a &= H_d + 26 \\ &= 100 + 26 = 126 \text{ ft. of water.} \end{aligned}$$

But, at end of stroke, $H_a = \frac{l_d}{g} \times \frac{A}{a} \omega^2 r$

$$\text{Therefore,} \quad 126 = \frac{100}{32.2} \times \left(\frac{6}{3}\right)^2 \omega^2 \times 1$$

$$\text{From which,} \quad \omega = 3.22$$

Let n = number of revolutions per minute.

Then,
$$\omega = \frac{2\pi n}{60}$$

Hence,
$$n = \frac{3.22 \times 60}{2\pi}$$

$$= 30.6 \text{ revolutions per minute.}$$

85. Work done against Friction in Pipes. There will be a frictional resistance to the flow in the suction and delivery

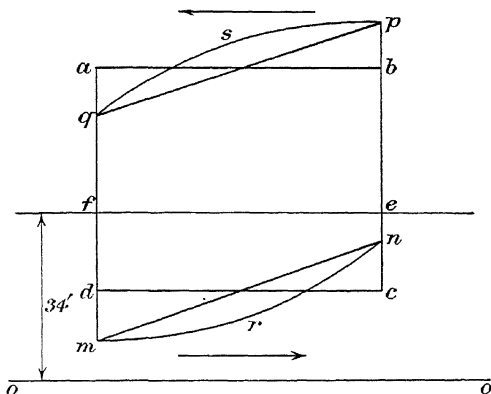


FIG. 90

pipes which follows the ordinary friction laws dealt with in Chapter VI.

For any point of the stroke the velocity in the pipe is given by Equation (3), Art. 82—

$$v = \frac{A}{a} \omega r \sin \theta$$

$$\begin{aligned} \text{Head lost in friction} = h_f &= \frac{4f l}{d} \times \frac{v^2}{2g} \\ &= \frac{4f l}{d} \frac{1}{2g} \left(\frac{A}{a} \omega r \sin \theta \right)^2 \end{aligned}$$

where f = coefficient of friction.

At the two ends of the stroke, $\sin \theta = 0$, therefore the velocity in the pipe is zero, and there will be no loss of head due to friction.

h_f has its maximum value when $\theta = 90$, that is at the middle of the stroke, when

$$h_f = \frac{4fl}{d^2 2g} \left(\frac{A}{a} \omega r \right)^2$$

The equation for h_f is a parabola. If the frictional head is added to the indicator diagrams of Figs. 86 and 87 the combined indicator diagram will be as shown in Fig. 90, the parabola $m r n$ being the work done against friction in the suction pipe, and the parabola $q s p$ being that of the delivery pipe.

Total work done during

$$\begin{aligned} \text{suction stroke} &= \text{area } e f m r n \\ &= \text{area } e f d c + \text{area } m r n \end{aligned}$$

Total work done during

$$\begin{aligned} \text{delivery stroke} &= \text{area } e f q s p \\ &= \text{area } a b e f + \text{area } q s p \end{aligned}$$

As the mean ordinate of a parabola is equal to two-thirds of the maximum ordinate,

$$\begin{aligned} \text{mean ordinate of suction pipe parabola} &= \frac{2}{3} h_{fs} \\ &= \frac{2}{3} \times \frac{4fl_s}{d_s^2 2g} \left(\frac{A}{a_s} \omega r \right)^2 \end{aligned}$$

where the suffix s applies to the suction pipe.

Work done against friction

$$\text{during suction stroke} = \text{area of parabola } m r n$$

$$\text{Work done against friction per sec.} = \frac{2}{3} \times \frac{4fl_s}{d_s^2 2g} \left(\frac{A}{a_s} \omega r \right)^2 \times W$$

In the same way, work done against friction during delivery stroke per sec. = $\frac{2}{3} h_{fd} \times W$

$$= \frac{2}{3} \times \frac{4fl_d}{d_d^2 2g} \left(\frac{A}{a_d} \omega r \right)^2 \times W \text{ ft. lb.}$$

where the suffix d refers to the delivery pipe and W is weight of water pumped per sec.

$$\begin{aligned} \text{Total work done per second} &= W \left(h_s + h_d + \frac{2}{3} h_{fs} + \frac{2}{3} h_{fd} \right) \end{aligned}$$

The vacuum pressure on the piston during the suction stroke for any angle θ of the crank

$$\begin{aligned} &= H_s + H_a + h_{fs} \\ &= H_s + \frac{l_s A \omega^2 r \cos \theta}{g a_s} + \frac{4 f l_s}{d_s 2g} \left(\frac{A}{a_s} \omega r \sin \theta \right)^2 \text{ ft. of water} \end{aligned}$$

The pressure on the piston, above atmosphere, during the delivery stroke is equal to

$$H_a + \frac{l_a A \omega^2 r \cos \theta}{g a_a} + \frac{4 f l_a}{d_a 2g} \left(\frac{A}{a_a} \omega r \sin \theta \right)^2 \text{ ft. of water}$$

It will be noticed that in both these equations the acceleration head is a maximum at the ends of the stroke and zero at the centre, whilst the frictional head is zero at the ends and a maximum at the centre of the stroke.

EXAMPLE.

A single acting pump has a stroke of 1 ft. and a piston diameter of 6 in. The centre of the pump is 15 ft. above level of water in sump and 100 ft. below delivery water level. The lengths of the suction and delivery pipes are 20 ft. and 120 ft. respectively, and their diameters are 3 in. The coefficient of friction for these pipes is .01. If the pump is working at 30 revs. per min., find the pressure head on the piston at the beginning, middle, and end of both strokes, and find the horse-power required to drive the pump. (Ignore the velocity head of the discharge water.)

(1) SUCTION STROKE.

$$\begin{aligned} \text{At ends of stroke} \quad H_a &= \frac{l_s}{g} \times \frac{A}{a_s} \omega^2 r \\ &= \frac{20}{32.2} \times \left(\frac{6}{3} \right)^2 \left(\frac{2\pi 30}{60} \right)^2 \times \frac{1}{2} \\ &= 12.3 \text{ ft. of water.} \end{aligned}$$

$$\begin{aligned} \text{At middle of stroke,} \quad h_{fs} &= \frac{4 f l_s}{d_s 2g} \left(\frac{A}{a_s} \omega r \right)^2 \\ &= \frac{4 \times .01 \times 20}{\frac{1}{4} \times 64.4} \left(4 \times \frac{2\pi 30}{60} \times \frac{1}{2} \right)^2 \\ &= 1.96 \text{ ft. of water.} \end{aligned}$$

$$\begin{aligned} \text{Pressure at beginning of stroke} &= H_s + H_a \\ &= 15 + 12.3 \\ &= 27.3 \text{ ft. of water (vacuum)} \end{aligned}$$

$$\begin{aligned}
 \text{Pressure at end of stroke} &= H_s - H_a \\
 &= 15 - 12.3 \\
 &= 2.7 \text{ ft. of water (vacuum)} \\
 \text{Pressure at middle of stroke} &= H_s + h_{fs} \\
 &= 15 + 1.96 \\
 &= 16.96 \text{ ft. of water (vacuum)}
 \end{aligned}$$

(2) DELIVERY STROKE.

$$\begin{aligned}
 \text{At ends of stroke,} \quad H_a &= \frac{l_d}{g} \times \frac{A}{a_d} \omega^2 r \\
 &= \frac{120}{32.2} \times \left(\frac{6}{3}\right)^2 \left(\frac{2\pi \cdot 30}{60}\right)^2 \times \frac{1}{2} \\
 &= 73.8 \text{ ft. of water.} \\
 \text{At middle of stroke} \quad h_{fa} &= \frac{4f l_d}{d_a^2 g} \left(\frac{A}{a} \omega r\right)^2 \\
 &= \frac{4 \times .01 \times 120}{\frac{1}{4} \times 64.4} \left(4 \times \frac{2\pi \cdot 30}{60} \times \frac{1}{2}\right)^2 \\
 &= 11.75 \text{ ft. of water} \\
 \text{Pressure at beginning of stroke} &= H_a + H_a \\
 &= 100 + 73.8 \\
 &= 173.8 \text{ ft. of water} \\
 &\quad \text{(above atmos.)} \\
 \text{Pressure at end of stroke} &= 100 - 73.8 \\
 &= 26.2 \text{ ft. of water} \\
 &\quad \text{(above atmos.)} \\
 \text{Pressure at middle of stroke} &= H_a + h_{fa} \\
 &= 100 + 11.75 \\
 &= 111.75 \text{ ft. of water} \\
 &\quad \text{(above atmos.)} \\
 \text{Work done per stroke} &= p \times \text{area} \times \text{length} \\
 &= wH \times \text{volume of cylinder} \\
 &= \text{Weight of water per stroke} \\
 &\quad \times H \\
 \text{Weight of water per stroke} = W &= 62.4 \times \frac{\pi}{4} (.5)^2 \times 1 \\
 &= 12.25 \text{ lb.}
 \end{aligned}$$

Work done during suction stroke

$$\begin{aligned}
 &= W \left(H_s + \frac{2}{3} h_{fs} \right) \\
 &= W \left\{ 15 + \left(\frac{2}{3} \times 1.96 \right) \right\} \\
 &= 16.31 W \text{ ft. lb.}
 \end{aligned}$$

Work done during delivery stroke

$$\begin{aligned}
 &= W \left(H_d + \frac{2}{3} h_{fd} \right) \\
 &= W \left\{ 100 + \left(\frac{2}{3} \times 11.75 \right) \right\} \\
 &= 107.8 W \text{ ft. lb.}
 \end{aligned}$$

Total work done per revolution = $W(107.8 + 16.31)$

$$= 12.25 \times 124.1 = 1520 \text{ ft. lb.}$$

Horse-power required

$$\begin{aligned}
 &= \frac{1520 \times 30}{33,000} \\
 &= 1.38
 \end{aligned}$$

86. Maximum Vacuum Pressure during Suction Stroke. It is not quite clear from Fig. 90 which part of the suction stroke will have the maximum vacuum pressure. A part of the curve $m r n$ may fall below m ; in which case separation may occur at some point other than the beginning of the stroke.

The velocity head of the water in the suction pipe is converted into pressure head on entering the cylinder, therefore the maximum vacuum pressure will occur just inside the suction pipe at the section where it enters the cylinder.

Let the total vacuum pressure in the pipe at this section = H , and v_s = velocity in suction pipe.

$$\text{Then, } H = H_s + H_a + \frac{v_s^2}{2g} + h_f$$

Substituting the values of H_a , v_s , and h_f in terms of θ ,

$$\begin{aligned}
 H &= H_s + \frac{l_s}{g} \frac{A}{a_s} \omega^2 r \cos \theta + \frac{v_s^2}{2g} \left(1 + \frac{4f l_s}{d_s} \right) \\
 &= H_s + \frac{l_s}{g} \frac{A}{a_s} \omega^2 r \cos \theta + \left(\frac{A}{a_s} \right)^2 \frac{\omega^2 r^2 \sin^2 \theta}{2g} \left(1 + \frac{4f l_s}{d_s} \right)
 \end{aligned}$$

Differentiating and equating to zero for a maximum,

$$\frac{dH}{d\theta} = -\frac{l_s}{g} \frac{A}{a_s} \omega^2 r \sin \theta + \left(\frac{A}{a_s}\right)^2 \frac{\omega^2 r^2 \sin \theta \cos \theta}{g} \left(1 + \frac{4f l_s}{d_s}\right) = 0$$

$$\text{From which,} \quad \cos \theta = \frac{l_s a}{Ar \left(1 + \frac{4f l_s}{d_s}\right)}$$

The maximum value $\cos \theta$ can have is unity. If the right-hand half of the above equation is applied to any actual pump

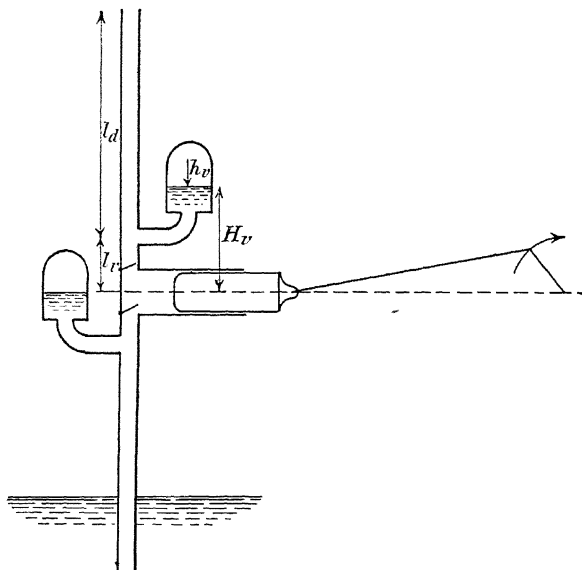


FIG. 91

it will be found to be much greater than unity. The vacuum pressure is, therefore, a maximum at the beginning of the stroke.

Hence, if separation occurs during the suction stroke, it will do so at the beginning.

87. The Reduction of the Acceleration Head by means of an Air Vessel. As the pressure in the pump must not fall below the separation pressure of the water, the maximum speed of a

pump is limited by the acceleration head. The acceleration head depends on the length of the suction or delivery pipe, and it may be considerably reduced by fitting an air vessel on these pipes as near to the cylinder as possible. Suppose an air vessel be fitted on the delivery pipe of the pump in Fig. 91. The air vessel is a cast-iron chamber having an opening at the base, through which the water may flow. As the level of the water in the chamber rises, the air trapped in the upper portion of the chamber is compressed, and will force the water out as soon as the pressure of the latter falls.

The water in the delivery pipe beyond the air vessel is assumed to flow with a uniform velocity throughout the cycle. During the middle portion of the delivery stroke, when the piston is forcing the water into the delivery pipe with a velocity greater than the mean, the additional water will flow into the air vessel. At the ends of the stroke, when the water is forced into the delivery pipe with a velocity less than the mean, the water will flow out of the air vessel and so make up the deficiency. The constant flow in the delivery pipe beyond the air vessel is thus maintained. The only volume of water which is now accelerated is that in the delivery pipe between the air vessel and cylinder; this is made small by fitting the air vessel as near the cylinder as possible.

The pressure of the air in the air vessel will vary as the water flows in and out; this variation is reduced by making the air vessel large compared with the area of the delivery pipe. In order to simplify the problem, it is assumed that the air vessel is so large that the change of water level in it may be neglected. This is the same as assuming the air pressure in the air vessel to be constant.

Let l_a = length of delivery pipe beyond air vessel

l_v = length of delivery pipe between cylinder and
air vessel

v_a = constant velocity of water in delivery pipe
beyond air vessel

$$\text{Then, } H_a = \frac{l_v}{g} \frac{A}{a_a} \omega^2 r \cos \theta$$

Head lost in friction in delivery pipe beyond air vessel

$$= \frac{4 f l_a v_a^2}{d_a 2g}$$

Head lost in friction in delivery pipe between air vessel and cylinder

$$= \frac{4f l_v}{d_a 2g} \left(\frac{A}{a_d} \omega r \sin \theta \right)^2$$

Also,
$$v_d = \frac{\text{volume of water per sec.}}{\text{area of delivery pipe}}$$

If pump is single acting,

$$v_d = \frac{2r A n}{60 a_d}$$

where n is the number of revolutions per minute.

If pump is double acting,

$$v_d = \frac{4r A n}{60 a_d}$$

Total pressure head at beginning of delivery stroke

$$= H_a + \frac{v_d^2}{2g} + \frac{4f l_d v_d^2}{d_a 2g} + \frac{l_v A}{g a_d} \omega^2 r$$

Total pressure head at end of stroke

$$= H_a + \frac{v_d^2}{2g} + \frac{4f l_d v_d^2}{d_a 2g} - \frac{l_v A}{g a_d} \omega^2 r$$

Total pressure head at middle of stroke,

$$= H_a + \frac{v_d^2}{2g} + \frac{4f l_d v_d^2}{d_a 2g} + \frac{4f l_v}{d_a 2g} \left(\frac{A}{a_d} \omega r \right)^2$$

The last term in each of these equations is small and may usually be neglected.

The same reasoning applies if an air vessel is fitted on the suction pipe, the water accelerated being reduced to the amount between the air vessel and cylinder. The above formula will hold for the suction pipe if the suffix s is substituted for the suffix d . In this case the pressure head will be below atmosphere.

$$\text{Total work done per sec.} = W \left(H + H_a + \frac{4f l_d v_d^2}{d_a 2g} + \frac{4f l_s v_s^2}{d_s 2g} \right)$$

The total pressure head in the air vessel reckoned above the centre of the cylinder will be approximately equal to the total pressure head in the delivery pipe above the same datum.

Let h_v = pressure of air in air vessel in feet of water
 and H_v = height of water level in air vessel above centre
 of cylinder

Then,

$$h_v + H_v = H_a + \frac{4f l_a v_a^2}{d_a 2g} + 34$$

if all small quantities are neglected.

EXAMPLE.

A reciprocating pump draws water from a sump through a suction pipe 6 in. diameter and 40 ft. long, the water level being 10 ft. below the level of the cylinder. The cylinder diameter is 9 in., stroke 15 in., and the length of the connecting rod 5 ft. The driving crank rotates at 20 revs. per min. Determine the pressure in the cylinder at the beginning of the stroke (a) when no air vessel is fitted; (b) when an air vessel is fitted at the cylinder level and distance 5 ft. from it. (London Univ., 1917.)

(a) (1) Assuming simple harmonic motion,

$$\begin{aligned} H_a &= \frac{A l_s}{a_s g} \omega^2 r \\ &= \left(\frac{9}{6}\right)^2 \times \frac{40}{32 \cdot 2} \left(2\pi \frac{20}{60}\right)^2 \frac{7 \cdot 5}{12} \\ &= 7 \cdot 67 \text{ ft. of water.} \end{aligned}$$

Total pressure head in cylinder

$$\begin{aligned} &= H_s + H_a \\ &= 10 + 7 \cdot 67 = 17 \cdot 67 \text{ ft. of water less than atmos.} \end{aligned}$$

(2) If harmonic motion is not assumed,

$$\begin{aligned} H_a &= \frac{A l_s}{a_s g} \omega^2 r \left(1 + \frac{r}{L}\right) \\ &= 7 \cdot 67 \times 1 \cdot 125 = 8 \cdot 67 \text{ ft. of water} \end{aligned}$$

Total pressure head in cylinder

$$= 10 + 8 \cdot 67 = 18 \cdot 67 \text{ ft. of water below atmos.}$$

(b) Assume pump is single acting.

$$\begin{aligned}
 \text{Then, } v_s &= \frac{A}{a_s} \times 2r \frac{n}{60} \\
 &= \left(\frac{9}{6}\right)^2 \times 2 \times \frac{7.5}{12} \times \frac{20}{60} = .937 \text{ ft. per sec.} \\
 h_f &= \frac{4fl_s v_s^2}{d_s 2g} \\
 &= \frac{4 \times .01 \times 35 \times .937^2}{.5 \times 64.4} = .0382 \text{ ft. of water}
 \end{aligned}$$

(1) Assuming simple harmonic motion,

$$\begin{aligned}
 H_a &= \frac{A l_v}{a_s g} \omega^2 r \\
 &= \left(\frac{9}{6}\right)^2 \times \frac{5}{32.2} \times \left(2\pi \frac{20}{60}\right)^2 \frac{7.5}{12} \\
 &= .959 \text{ ft. of water}
 \end{aligned}$$

Total pressure head in cylinder

$$\begin{aligned}
 &= H_s + H_a + h_f \\
 &= 10 + .959 + .0382 \\
 &= 10.9972 \text{ ft. of water below atmos.}
 \end{aligned}$$

(2) If simple harmonic motion is not assumed,

$$\begin{aligned}
 H_a &= \frac{A l_v}{a_s g} \omega^2 r \left(1 + \frac{r}{L}\right) \\
 &= .959 \times 1.125 = 1.084 \text{ ft. of water}
 \end{aligned}$$

Total pressure head in cylinder

$$\begin{aligned}
 &= 10 + 1.084 + .0382 \\
 &= 11.1222 \text{ ft. of water below atmos.}
 \end{aligned}$$

88. Work Saved by Fitting Air Vessel. The following applies to either suction or delivery strokes. Consider in the first case the pump to be single acting. If there is no air vessel on the pipe, the diagram representing the work lost in friction during the revolution is a parabola (Art. 85), the area of which equals

$$W \times \frac{2}{3} \times \frac{4fl}{d 2g} \left(\frac{A}{a} \omega r\right)^2 \quad . \quad . \quad . \quad . \quad . \quad (1)$$

where W = weight of water pumped per revolution.

Suppose an air vessel is now fitted just outside the cylinder. The velocity of flow in the pipe is now constant ; the frictional loss will, therefore, also be constant and acts over both strokes. The diagram showing the work done against friction during the revolution will now be a rectangle of area

$$W \times \frac{4flv^2}{d2g}$$

where v = mean velocity of flow in pipe.

$$\text{But, } v = \frac{A}{a} \frac{2r\omega}{2\pi} = \frac{A}{a} \frac{\omega r}{\pi}$$

Therefore, work done against friction

$$= W \times \frac{4fl}{d2g} \left(\frac{A}{a} \frac{\omega r}{\pi} \right)^2 \quad \dots \quad (2)$$

Subtracting Equation (2) from Equation (1), work saved by fitting air vessel

$$= W \times \frac{4fl}{d2g} \times \left(\frac{A}{a} \omega r \right)^2 \left(\frac{2}{3} - \frac{1}{\pi^2} \right)$$

$$\text{Percentage of work saved} = \frac{\frac{2}{3} - \frac{1}{\pi^2}}{\frac{2}{3}} \times 100$$

$$= 84.8 \text{ per cent of frictional work.}$$

If pump is double acting,

$$v = 2 \frac{A}{a} \frac{\omega r}{\pi}$$

$$\text{Percentage saved} = \frac{\frac{2}{3} - \frac{4}{\pi^2}}{\frac{2}{3}} = 39.2 \text{ per cent.}$$

89. Rate of Flow Into and From Air Vessel. Consider first the case of a single acting pump. The water in the pipe beyond the air vessel will have a constant velocity during the

whole cycle, whilst the water enters or issues from the cylinder during one stroke only.

$$\text{Velocity of flow to or from cylinder} = \frac{A}{a} \omega r \sin \theta \text{ ft. per sec.}$$

$$\text{Rate of flow to or from cylinder} = A \omega r \sin \theta \text{ cu. ft. per sec.}$$

$$\text{Velocity of flow beyond air vessel} = \frac{A}{a} \frac{\omega r}{\pi} \text{ ft. per sec.}$$

$$\text{Rate of flow beyond air vessel} = \frac{A \omega r}{\pi} \text{ cu. ft. per sec.}$$

$$\begin{aligned} \text{Rate of flow from air vessel} &= \frac{A \omega r}{\pi} - A \bar{\omega} r \sin \theta \\ &= A \omega r \left(\frac{1}{\pi} - \sin \theta \right) \\ &\quad \text{cu. ft. per sec.} \end{aligned}$$

If this equation is negative the water is flowing into the air vessel. It will be noticed that there are two points on the delivery stroke at which $\sin \theta = \frac{1}{\pi}$; at these points there will be no flow either into or from the air vessel.

Next, suppose the pump to be double acting.

Then,

$$\text{velocity of flow beyond air vessel} = \frac{2A \omega r}{a \pi}$$

$$\text{and rate of flow beyond air vessel} = 2 A \frac{\omega r}{\pi}$$

$$\text{Rate of flow from air vessel} = A \omega r \left(\frac{2}{\pi} - \sin \theta \right) \text{ cu. ft. per sec.}$$

89A. Pump Duty. The "duty" of a pump is a practical way of expressing the overall efficiency. For a pump driven by a steam engine the duty is the number of foot pounds of work given out by the pump for every 1,000,000 British thermal units supplied to the engine by the boiler. Hence it takes into account the efficiency of the pump and of the steam engine.

If the pump is delivering W lbs. of water per sec. against a head of H ft.,

work done by pump = WH ft. lb. per sec.

No. of British thermal units supplied to engine per sec.

$$= \left(\frac{\text{weight of steam}}{\text{used per sec.}} \right) \times \left(\frac{\text{total heat of 1 lb.}}{\text{of steam supplied}} \right)$$

Duty of pump

$$= \frac{WH \times 1,000,000}{(\text{Wgt. of steam per sec.}) \times (\text{total heat 1 lb. steam})}$$

Formerly, the term "duty" was the number of foot pounds of work given out by the pump per bushel of coal burned in the boiler. In this case the efficiency of the boiler is also included.

If the term "duty" is applied to a pump driven by an electric motor, it is based on 1,000,000 British thermal units supplied to the motor.

EXAMPLES 8.

(1) Water is raised to a height of 60 ft. by a single acting pump having a bore of 6 in. and a stroke of 12 in. If the pump has a speed of 40 revs. per min., find the theoretical horse-power required and the theoretical discharge. Neglect all losses.

Ans.—H.p. = .89; Q = 48.9 gallons per minute.

(2) If the pump in Question (1) has an actual discharge of 47 gallons per min., find the percentage slip and the coefficient of discharge.

Ans.—3.81 per cent; .962.

(3) If the pump in Question (1) has a delivery pipe of 4 in. diameter, and a length of 50 ft., find the acceleration head at the beginning of the stroke when no air vessel is fitted.

Ans.—30.6 ft. of water.

(4) If a large air vessel is fitted on the delivery pipe of Question (3), close to the cylinder, find the theoretical velocity of flow in delivery pipe and the pressure head in the cylinder necessary to overcome friction in the delivery pipe. (f = .01.)

Ans.—1.5 ft. per sec.; .21 ft. of water.

(5) A double acting reciprocating pump (cylinder 4 in. diameter, stroke 6 in.) makes 120 strokes per minute. It draws water from a sump, the surface of which is 6 ft. below the centre of the pump cylinder. If the total length of the suction pipe is 18 ft., and the diameter 2 in., determine the absolute pressure, in pounds per square inch, of the water in the cylinder (a) at the beginning, (b) at middle, and (c) at the end of the suction stroke, there being no air vessel on the suction pipe. Sketch the probable diagram for the stroke. State if separation is likely to occur, and give reasons. Assume the piston has simple harmonic motion. (London Univ., 1912.)

Ans.—(a) 2.56 lb. per sq. in.

(b) 12.1 , ..

(c) 21.7

(6) Discuss the conditions under which "separation" and "negative slip" occur in reciprocating pumps.

Sketch the form of indicator card obtained when (a) separation only, (b) separation, and also opening of the delivery valve occur during the suction stroke.

The bore and stroke of a single acting reciprocating pump are 4 in. and 8 in. respectively, and the plunger has simple harmonic motion. The suction pipe is $3\frac{1}{4}$ in. in diameter and 14 ft. long, and the centre of the pump is 12 ft. above the water in the sump. Determine the theoretical speed, in revolutions per minute, at which there will be separation, assuming it to occur when the pressure falls below 4 lb. per sq. in. (London Univ., 1921.)

Ans.—73 revs. per min.

(7) Explain fully the functions of air vessels when they are introduced on the suction and delivery pipes of pumps. (London Univ., 1911.)

(8) A single acting reciprocating pump, 12 in. diameter, 20 in. stroke, with a large air chamber on the suction side, has a suction head of 8 ft. The suction pipe is 6 in. diameter, and 14 ft. long. The pump makes 40 working strokes per minute, and discharges at its own level.

Neglecting all losses except those due to friction in the suction pipe ($f = .01$), find the horse-power of the pump.

If the plunger has simple harmonic motion, determine the rate of flow from the air chamber when the plunger is at the centre of its stroke. (London Univ., 1916.)

Ans.—H.p. = .828; $Q = 1.87$ cu. ft per sec.

(9) Briefly explain the reasons for placing air vessels on the suction and delivery pipes of a reciprocating pump.

A single acting reciprocating pump has a plunger diameter of 10 in. and a stroke of 18 in. The delivery pipe is $4\frac{1}{2}$ in. diameter and 160 ft long. If the motion of the plunger is simple harmonic, find the horse-power saved in overcoming friction in the delivery pipe by the provision of a large air vessel when the speed of the pump is 60 revs. per min. Assume that $f = .01$. (London Univ., 1921.)

Ans.—7.52 h.p.

(10) A plunger is fitted in a vertical pipe which is full of water, and whose lower end is submerged in a suction tank. It is moved upwards with an acceleration of 5 ft. per sec. If air is liberated from the water when the absolute pressure falls below 4 ft. of water, and if the barometric height is 32 ft. of water, what is the maximum height above the level in the suction tank at which the plunger can operate without cavitation? (A.M.I. Mech. E., 1926.)

Ans.—24.2 ft.

(11) What is meant by "separation" in a reciprocating pump? The plunger of such a pump moves with simple harmonic motion. The diameter is 12 in. and the stroke 2 ft. The suction pipe line is 9 in. in diameter and 80 ft. long and the suction lift 14 ft. Calculate the maximum speed at which the pump can operate without separation occurring at the beginning of the stroke. Take the effective height of the barometer as 28 ft. of water. (A.M. Inst. C.E., 1926.)

Ans.—17 revs. per min.

(12) What is meant by "separation" in a reciprocating pump? In such a pump the cylinder diameter is 9 in.; the suction pipe is 9 in. diameter and 60 ft. long; the height of the pump above the level of the water in the suction sump is 15 ft. If the stroke is 18 in., and if the motion is simple harmonic, at what speed will separation occur at the beginning of the stroke? Take the effective height of the barometer as 30 ft. of water. (A.M.I. Mech. E., 1925.)

Ans.—31.2 revs. per min.

CHAPTER IX

IMPACT OF WATER

90. Pressure on Stationary Flat Plate. When a jet of water impinges normally on a flat plate (Fig. 92) the force on the plate is equal to the rate of change of the momentum of the jet, or to the change of momentum per second.

Let a = cross-sectional area of jet in square feet.

V = velocity of jet in feet per second.

and W = weight of water striking plate per second.

Then, $W = w a V$

The jet strikes the plate and leaves it tangentially, so that all its momentum in a direction normal to plate is destroyed.

Force on plate = change of momentum per second

$$\begin{aligned}
 &= \left. \begin{array}{l} \text{mass of water striking} \\ \text{plate per second} \end{array} \right\} \times \left\{ \begin{array}{l} \text{change of velocity} \\ \text{normal to plate} \end{array} \right. \\
 &= \frac{W}{g} \times V \\
 &= \frac{w a V^2}{g} \text{ lb.}
 \end{aligned}$$

If the plate is inclined to the jet, as in Fig. 93, the force of the jet may be resolved into a normal and tangential component.

Let θ = angle of inclination of plate to jet.

Normal force on plate = (change of momentum per sec.) $\sin \theta$

$$\begin{aligned}
 &= \frac{W}{g} \times V \times \sin \theta \\
 &= \frac{w a V^2}{g} \sin \theta \text{ lb.}
 \end{aligned}$$

Tangential component of force on plate $\left. \vphantom{\begin{array}{l} \text{of force on plate} \end{array}} \right\} = \frac{w a V^2}{g} \cos \theta \text{ lb.}$

This case would not be possible in practice as there would be a continually lengthening jet, the distance between the plate and nozzle increasing by v ft. every second.

If, instead of a single plate, there is a continuous series of plates at a fixed distance apart and all moving in the same direction as the jet with a velocity v , the weight of water striking the plates is now equal to waV . This condition

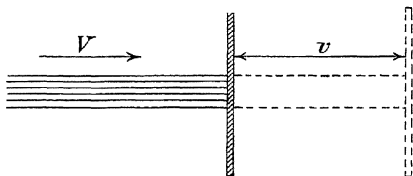


FIG. 94

would be obtained if the plates are all fixed radially around the circumference of a large wheel on which the jet impinged tangentially. (Fig. 95.)

$$\begin{aligned}\text{Then, force on plates} &= \frac{W}{g} (V - v) \\ &= \frac{waV}{g} (V - v)\end{aligned}$$

$$\begin{aligned}\text{Work done per sec. on plates} &= \frac{waV}{g} (V - v)v \\ &= \frac{(V - v)}{g} v \text{ per lb. of water}\end{aligned}$$

$$\begin{aligned}\text{Energy supplied by jet} &= \text{kinetic energy of jet per sec.} \\ &= \frac{W V^2}{2g} \\ &= \frac{V^2}{2g} \text{ per lb. of water}\end{aligned}$$

$$\begin{aligned}\text{Efficiency of plates} &= e = \frac{\text{work done per lb. of water}}{\text{kinetic energy of jet per lb.}} \\ &= \frac{(V - v)v}{\frac{V^2}{2g}} = \frac{2(V - v)v}{V^2}\end{aligned}$$

This case would not be possible in practice as there would be a continually lengthening jet, the distance between the plate and nozzle increasing by v ft. every second.

If, instead of a single plate, there is a continuous series of plates at a fixed distance apart and all moving in the same direction as the jet with a velocity v , the weight of water striking the plates is now equal to waV . This condition

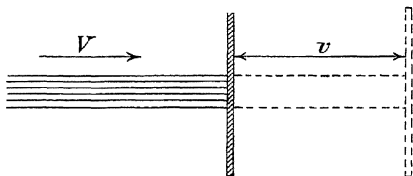


FIG. 94

would be obtained if the plates are all fixed radially around the circumference of a large wheel on which the jet impinged tangentially. (Fig. 95.)

$$\begin{aligned}\text{Then, force on plates} &= \frac{W}{g} (V - v) \\ &= \frac{waV}{g} (V - v)\end{aligned}$$

$$\begin{aligned}\text{Work done per sec. on plates} &= \frac{waV}{g} (V - v)v \\ &= \frac{(V - v)}{g} v \text{ per lb. of water}\end{aligned}$$

$$\begin{aligned}\text{Energy supplied by jet} &= \text{kinetic energy of jet per sec.} \\ &= \frac{W V^2}{2g} \\ &= \frac{V^2}{2g} \text{ per lb. of water}\end{aligned}$$

$$\begin{aligned}\text{Efficiency of plates} &= e = \frac{\text{work done per lb. of water}}{\text{kinetic energy of jet per lb.}} \\ &= \frac{(V - v)v}{\frac{V^2}{2g}} = \frac{2(V - v)v}{V^2}\end{aligned}$$

Differentiating and equating to zero for maximum efficiency,

$$\frac{de}{dv} = V - 2v = 0$$

From which, $v = \frac{V}{2}$

$$\text{Then, maximum efficiency} = \frac{2\left(V - \frac{V}{2}\right)\frac{V}{2}}{V^2} = \frac{1}{2}$$

Flat plates used in this manner are called vanes, and a wheel of the type shown in Fig. 95 is known as an undershot water wheel.

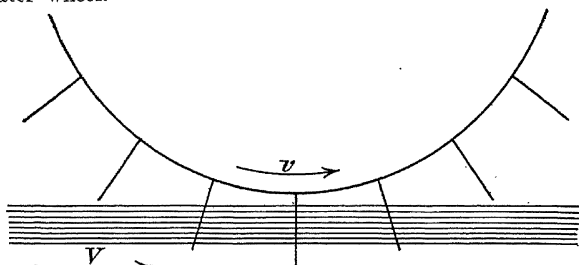


FIG. 95

EXAMPLE.

A jet of water 3 in. diameter and moving with a velocity of 40 ft. per sec. strikes a series of flat plates normally. If the plates are moving in the same direction as the jet with a velocity of 30 ft. per sec., find the pressure on the plates, the work done per second, and the efficiency.

$$\begin{aligned} \text{Pressure on plates} &= \frac{waV}{g} (V - v) \\ &= \frac{62.4}{32.2} \times \frac{\pi}{4} \times \left(\frac{1}{4}\right)^2 \times 40(40 - 30) \\ &= 38 \text{ lb.} \\ \text{Work done per sec.} &= 38 \times 30 \\ &= 1140 \text{ ft. lb.} \\ \text{Efficiency} &= \frac{2(V - v)v}{V^2} \\ &= \frac{2(40 - 30)30}{1600} \\ &= 37.5 \text{ per cent.} \end{aligned}$$

92. Pressure on a Fixed Curved Vane. Consider the curved fixed vane of Fig. 96, and let ab be the normal at the centre of the vane. The jet strikes the vane at an angle of α to ab and leaves at an angle of β , the vane deflecting the jet through an angle of $180 - (\alpha + \beta)$. The velocity of the jet is not changed in magnitude as it flows over the vane; it is the direction only which is changed. The velocity of the entering jet in the direction ab is $V \cos \alpha$, and it leaves the vane with a velocity component of $-V \cos \beta$ in the direction ab .

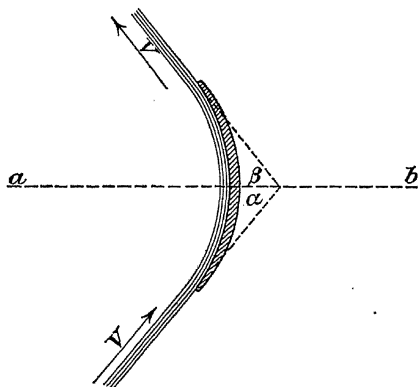


FIG. 96

$$\begin{aligned}
 \text{Force on vane in direction } ab &= \text{change of momentum per sec.} \\
 &= \frac{W}{g} \text{ (change of velocity in direction } ab) \\
 &= \frac{W}{g} [V \cos \alpha - (-V \cos \beta)] \\
 &= \frac{W}{g} (V \cos \alpha + V \cos \beta)
 \end{aligned}$$

where $W = w a V$

If the vane is semicircular, the angles α and β are each equal to 0 , then,

$$\text{force on vane in direction } ab = \frac{2W}{g} V$$

The force of a jet on a semicircular vane is thus twice as great as that on a flat plate. This is due to the fact that, with

a semicircular vane, use is made of the reaction of the leaving water which exerts the same force on the vane in leaving as in entering. This principle is made use of in the Pelton wheel.

There will be a tangential force on the vane at right angles to $a b$. This will be equal to mass of water per sec. \times change of velocity in a direction at right angles to $a b$.

$$\text{Or, tangential force} = \frac{W}{g} (V \sin \alpha - V \sin \beta)$$

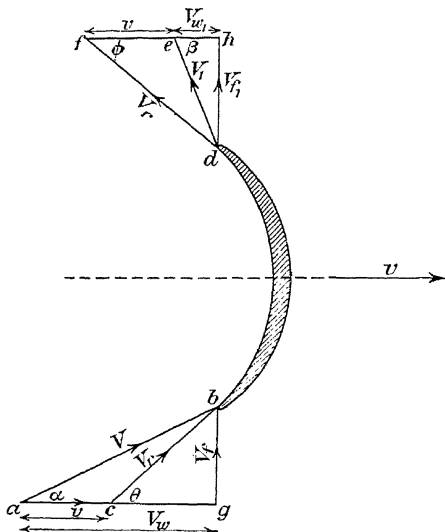


FIG. 97

93. Pressure on a Moving Curved Vane. Suppose the curved vane of Fig. 96 is moving in the direction $a b$ with a velocity v , and let the jet impinge on the vane with a velocity V , as before. The velocity of the water over the vane will be equal to the relative velocity of the jet to the vane, and may be found by subtracting the vectors of V and v .

Let V_r = relative velocity between jet and vane at entrance.

Referring to Fig. 97, draw $a b$ to represent the velocity of the jet at entrance in magnitude and direction. Next draw $a c$ to represent the velocity of the vane in magnitude and direction.

Then cb represents the relative velocity between the jet and the vane. If the water is to enter without shock, the vane at entrance must be parallel to cb .

The water will pass over the vane and leave with the velocity V_r . The absolute velocity of the leaving water may be found by drawing the triangle of velocities at exit.

Let V_1 = absolute velocity with which water leaves vane.

Draw df to represent the relative velocity V_r ; if the water leaves the vane without shock, V_r will be parallel to the vane at exit.

Draw fe to represent v in magnitude and direction. Then de gives the absolute velocity of the leaving water.

The velocity of the entering water may be resolved into two components, one parallel to the direction of motion of the vane and known as the velocity of whirl, the other perpendicular to the direction of motion of the vane and known as the velocity of flow. The same terms are also applied to the components of the velocity of the leaving water.

Let V_w = velocity of whirl at entrance

V_{w_1} = velocity of whirl at exit

V_f = velocity of flow at entrance

V_{f_1} = velocity of flow at exit

These are represented in Fig. 97 by ag , he , gb , and dh respectively.

Let θ = angle between relative velocity and direction of motion at inlet.

and ϕ = angle between relative velocity and direction of motion at outlet

Then, if the water is to enter and leave the vane without shock, the angles of the blade at inlet and outlet must be made equal to θ and ϕ respectively.

The force on the vane in the direction of motion is equal to the change of momentum per second of the water in this direction.

Or,

$$\text{force on vane} = \frac{W}{g} (V_w + V_{w_1}) \quad \dots \quad (1)$$

where W = weight of water flowing per second.

If the friction between the water and vane be neglected, the relative velocity at exit equals the relative velocity at entrance.

$$\text{Or, } V_{r_1} = V_r$$

From Equation (1),

$$\text{Work done on vane per sec.} = \frac{W}{g} (V_w + V_{w_1})v \quad (2)$$

If V_{w_1} is in the same direction as the velocity of the vane, the equation then becomes

$$\text{Work done per second} = \frac{W}{g} (V_w - V_{w_1})$$

The work done is also equal to the change of kinetic energy of the jet per second.

$$\text{Or, work done per second} = \frac{W V^2}{2g} - \frac{W V_1^2}{2g}$$

$$= \frac{W}{2g} (V^2 - V_1^2)$$

$$\begin{aligned} \text{Then, efficiency} &= \frac{\frac{W}{2g} (V^2 - V_1^2)}{\frac{W}{2g} V^2} = \frac{(V^2 - V_1^2)}{V^2} \\ &= 1 - \left(\frac{V_1}{V} \right)^2 \quad (3) \end{aligned}$$

It follows from this equation that, for a given angle α , the efficiency is a maximum when V_1 is a minimum. This occurs when the angle ϕ is zero, in which case,

$$V_1 = V_{w_1} = V_r - v$$

If α also equals zero,

$$V_r = V - v$$

$$\text{Then, } V_1 = V - 2v$$

$$\text{Therefore, } V_1 = 0 \text{ when } v = \frac{V}{2},$$

in which case the efficiency is unity; also the vane is semicircular.

EXAMPLE.

A vane has a velocity of 40 ft. per sec. Water impinges on the vane at an angle of 30° and leaves at an angle of 160° to the direction of motion. If the entering water has an absolute velocity of 80 ft. per sec., find (1) the angles of the blade tips at inlet and outlet; (2) the work done on the vane per pound of water; and (3) the efficiency.

(1) Referring to Fig. 97,

$$V = 80 \text{ ft. per sec.}, \quad v = 40 \text{ ft. per sec.}, \quad \alpha = 30^\circ$$

and $\beta = 20^\circ$.

From triangle of velocities at inlet,

$$V_w = 80 \cos 30 = 69.3 \text{ ft. per sec.}$$

$$V_f = 80 \sin 30 = 40 \text{ ft. per sec.}$$

$$\tan \theta = \frac{V_f}{V_w - v} = \frac{40}{69.3 - 40} = 1.36$$

and $\theta = 53.7^\circ$

$$V_r = \frac{V_f}{\sin \theta} = \frac{40}{\sin 53.7} = 49.6 \text{ ft. per sec.}$$

From triangle of velocities at outlet,

$$V_r = V_{r_1} = 49.6 \text{ ft. per sec.}$$

$$\tan \beta = \frac{V_{r_1} \sin \phi}{V_{r_1} \cos \phi - v}$$

$$\text{Or,} \quad \tan 20 = \frac{49.6 \sin \phi}{49.6 \cos \phi - 40}$$

$$\text{From which} \quad \tan \phi = .364 - \frac{.294}{\cos \phi}$$

$$\text{Therefore,} \quad \phi = 4^\circ$$

$$\text{Also} \quad V_1 = \frac{V_{r_1} \sin 4^\circ}{\sin 20^\circ}$$

$$= \frac{49.6 \times .0698}{.342} = 10.12 \text{ ft. per sec.}$$

These results might also have been obtained by drawing the velocity triangles to scale.

$$\begin{aligned}
 (2) \text{ Work done per lb. of water } \left. \vphantom{\begin{array}{l} \text{of water} \end{array}} \right\} &= \frac{1}{g} (V_w + V_{w_1})v \\
 &= \frac{1}{32.2} (69.3 + 10.12 \cos 20) 40 \\
 &= 97.9 \text{ ft. lb. per sec.}
 \end{aligned}$$

$$\begin{aligned}
 (3) \text{ Efficiency } &= \frac{\text{work done per sec.}}{\text{kinetic energy supplied per sec.}} \\
 &= \frac{97.9}{\frac{V^2}{2g}} = \frac{97.9 \times 64.4}{(80)^2} \\
 &= 98.5 \text{ per cent.}
 \end{aligned}$$

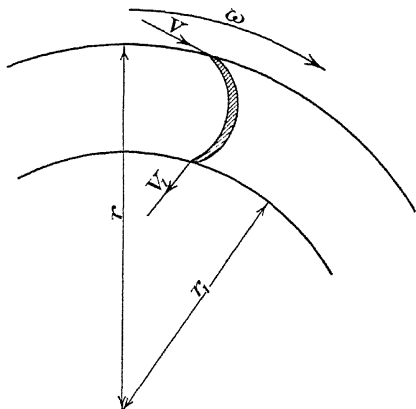


FIG. 98

The work done might also have been found from the change of kinetic energy.

$$\text{Or, work done per lb. of water } \left. \vphantom{\begin{array}{l} \text{of water} \end{array}} \right\} = \frac{V^2}{2g} - \frac{V_1^2}{2g}$$

$$\text{Efficiency} = \frac{V^2 - V_1^2}{V^2}$$

94. Flow over a Radial Vane. Suppose the blade of Fig. 98 to be one of a series of blades fixed radially to the rim of a rotating wheel,

Let r = radius of wheel at entrance

r_1 = radius of wheel at exit

ω = angular velocity of wheel

v = tangential velocity of blade tip at entrance

v_1 = tangential velocity of blade tip at exit.

Treat all velocities in direction of motion of wheel as positive.

Tangential momentum of water striking blade at entrance $\left. \vphantom{\begin{array}{l} \text{Tangential momentum of water} \\ \text{striking blade at entrance} \end{array}} \right\} = \frac{V_w}{g}$ per lb. of water per sec.

Moment of momentum at entrance $\left. \vphantom{\begin{array}{l} \text{Moment of momentum at} \\ \text{entrance} \end{array}} \right\} = \frac{V_w}{g} r$ per lb. of water per sec.

Tangential momentum of water leaving blade $\left. \vphantom{\begin{array}{l} \text{Tangential momentum of water} \\ \text{leaving blade} \end{array}} \right\} = \frac{V_{w_1}}{g}$ per lb. of water per sec.

Moment of momentum at exit $= \frac{V_{w_1}}{g} r_1$ per lb. of water per sec.

Change of moment of momentum per lb. of water per sec. $\left. \vphantom{\begin{array}{l} \text{Change of moment of momentum} \\ \text{per lb. of water per sec.} \end{array}} \right\} = \frac{V_w r}{g} - \frac{V_{w_1} r_1}{g} = \text{torque on wheel}$

Work done by torque per lb. of water $\left. \vphantom{\begin{array}{l} \text{Work done by torque per lb.} \\ \text{of water} \end{array}} \right\} = \left(\frac{V_w r}{g} - \frac{V_{w_1} r_1}{g} \right) \bar{\omega}$

But, $v = \omega r$

and $v_1 = \omega r_1$

Then,

Work done on wheel per lb. of water $\left. \vphantom{\begin{array}{l} \text{Work done on wheel per lb. of} \\ \text{water} \end{array}} \right\} = \frac{V_w v}{g} - \frac{V_{w_1} v_1}{g} \quad (1)$

If the water leaves against the direction of motion of the wheel, V_{w_1} will be negative, and Equation (1) becomes

$$\frac{V_w v}{g} + \frac{V_{w_1} v_1}{g}$$

This equation is very important in problems dealing with turbines.

EXAMPLE.

A wheel having radial blades is 2 ft. radius at the outer tip of the blades and 1 ft. at the inner. Water enters the blades at the outer tip with a velocity of 100 ft. per sec. at an angle of 30° to the tangent, and leaves the blade with a velocity of flow of 14 ft. per sec. The blade has an angle of 40° at entrance and 35° at exit. Find the work done per pound of water entering the wheel, the speed of the wheel, and the efficiency.

The triangles of velocities are shown in Fig. 99. Consider the triangle at inlet.

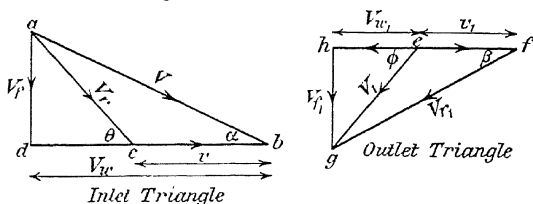


FIG. 99

$$V = 100 \text{ ft. per sec.}$$

$$V_f = 100 \sin 30 = 50 \text{ ft. per sec.}$$

$$V_w = 100 \cos 30 = 86.6 \text{ ft. per sec.}$$

$$dc = V_w - v = \frac{50}{\tan 40} = 59.6$$

Then, $v = 86.6 - 59.6 = 27 \text{ ft. per sec.}$

Also, $\frac{v}{v_1} = \frac{r}{r_1} = 2$

Therefore, $v_1 = \frac{27}{2} = 13.5 \text{ ft. per sec.}$

Consider the triangle at outlet.

$$h_f = \frac{14}{\tan 35} = 20$$

$$= v_1 + V_{w_1}$$

And $V_{w_1} = 20 - 13.5 = 6.5 \text{ ft. per sec.}$

and is negative, as it is against the direction of motion of the wheel.

From Equation (1)

work done per lb. of water

$$\begin{aligned}
 &= \frac{V_w v}{g} - \frac{V_{w_1} v_1}{g} \\
 &= \frac{(86.6 \times 27) - (-6.5 \times 13.5)}{32.2} \\
 &= 74.8 \text{ ft. lb.}
 \end{aligned}$$

$$\omega = \frac{v}{r} = \frac{27}{2} = 13.5 \text{ radians per sec.}$$

$$\begin{aligned}
 \text{Speed} &= \frac{13.5 \times 60}{2\pi} \\
 &= 129 \text{ revs. per min.}
 \end{aligned}$$

$$\begin{aligned}
 \text{Efficiency} &= \frac{\text{work done}}{\text{kinetic energy supplied}} \\
 &= \frac{74.8}{\frac{V^2}{2g}} = \frac{74.8 \times 64.4}{100^2} \\
 &= 48.2 \text{ per cent.}
 \end{aligned}$$

95. Propulsion of Ships by Jet. A ship may be driven through the water by the reaction of a jet of water issuing from the back or stern of the ship. The water is pumped into a tank carried by the ship; the whole of the pressure head in the tank is converted into velocity head as it flows from the ship's stern.

Let v = velocity of ship in feet per second

V = absolute velocity of issuing jet

V_r = relative velocity between jet and ship

Then $V_r = v + V$ (1)

$$\text{Head of water in tank} = \frac{V_r^2}{2g}$$

$$= \text{Energy supplied per lb. of water}$$

Weight of water issuing from orifice = $w a V_r$

where a is the area of jet.

The momentum of the issuing jet relative to the surrounding water is $\frac{W V_r}{g}$ per second. This will be the change of momentum as the water had no momentum before entering the ship.

Therefore,

$$\text{force propelling ship} = \frac{WV}{g} \text{ lb.}$$

$$\text{Work done per sec.} = \frac{WV}{g} \times v \text{ ft. lb.}$$

Substituting for V from Equation (1)

$$\text{Work done per sec.} = \frac{W(V_r - v)v}{g} \text{ ft. lb.}$$

$$\text{Energy supplied per sec.} \left. \vphantom{\begin{matrix} \\ \end{matrix}} \right\} = \frac{W V_r^2}{2g}$$

$$\text{Efficiency} = e = \frac{\frac{W(V_r - v)v}{g}}{\frac{W V_r^2}{2g}} = \frac{2(V_r - v)v}{V_r^2}$$

Differentiating and equating to zero for a maximum

$$\frac{de}{dv} = V_r - 2v = 0$$

$$\text{from which} \quad v = \frac{V_r}{2}$$

Then,

$$\begin{aligned} \text{maximum efficiency} &= \frac{2(2v - v)v}{(2v)^2} \\ &= 50 \text{ per cent.} \end{aligned}$$

If the entrance to the inlet pipe of the pump is facing the direction of motion of the ship, the water will enter the pipe with a velocity v relative to the ship. This will reduce the energy to be supplied by the pump by the amount $\frac{Wv^2}{2g}$.

$$\text{Then, energy supplied} = \frac{W}{2g} (V_r^2 - v^2) \text{ ft. lb. per sec.}$$

The work done by issuing jet is the same as before.

$$\text{The efficiency now equals} \frac{\frac{W(V_r - v)v}{g}}{\frac{W}{2g} (V_r^2 - v^2)}$$

$$\begin{aligned}\text{Or, efficiency} &= \frac{2 (V_r - v)v}{(V_r + v) (V_r - v)} \\ &= \frac{2v}{V_r + v} \quad \cdot \quad \cdot \quad \cdot \quad \cdot \quad \cdot \quad (2)\end{aligned}$$

If $v = \frac{V_r}{2}$ which was the value for maximum efficiency in the first case,

$$\text{efficiency} = \frac{2v}{2v + v} = 66.6 \text{ per cent.}$$

It will be noticed from Equation (2) that the efficiency equals unity when $V_r = v$. This would be impossible in practice as there would then be no propelling force on the ship.

The main advantage of jet propulsion is that it overcomes the difficulty of the racing of the propeller in rough seas. Several naval ships have been fitted with jet propulsion as an experiment. It was found that although the actual jet was more efficient than the screw propeller, the mechanical efficiency of the pumps reduced the overall efficiency of the whole plant to a much lower value than that of the screw propeller plant.

Jet propulsion is sometimes used in lifeboats.

EXAMPLE.

A jet-propelled boat has a velocity of 12 miles an hour when the jet has a velocity of 35 ft. per sec. relative to the boat. If the area of the jet is 25 sq. in., find the theoretical horse-power required to work the pumps. Assume that full advantage of the boat's motion is obtained when scooping in the water.

$$\begin{aligned}\text{Weight of water discharged per sec.} &= w a V_r \\ &= 62.4 \times \frac{25}{144} \times 35 \\ &= 379 \text{ lb.}\end{aligned}$$

$$\begin{aligned}\text{Work done per sec.} &= \frac{W(V_r - v)v}{g} \\ &= \frac{379}{32.2} \left\{ 35 - \left(\frac{12 \times 88}{60} \right) \right\} \frac{12 \times 88}{60} \\ &= 3600 \text{ ft. lb.}\end{aligned}$$

$$\begin{aligned}\text{Horse-power} &= \frac{3600}{550} \\ &= 6.55.\end{aligned}$$

EXAMPLES 9.

(1) A jet of water 2 in. diameter, having a velocity of 60 ft. per sec., impinges normally on a flat plate. Find the pressure on the plate (1) when the plate is at rest ; (2) when the plate is moving in the same direction as the jet with a velocity of 20 ft. per sec. Find, also, the work done per second in the second case.

Ans.—(1) 152 lb. ; (2) 67.5 lb. 1,350 ft. lb.

(2) A 3 in. diameter jet, having a velocity of 80 ft. per sec., strikes a flat plate, the normal of which is inclined at 30° to the jet. Find the normal pressure on plate (1) when plate is stationary ; (2) when plate has a velocity of 40 ft. per sec. away from jet.

Ans.—(1) 526 lb. ; (2) 127 lb.

(3) A jet of water impinges on a series of hemispherical cups and is deflected through 180° . If the velocity of the jet is 100 ft. per sec., and that of the cups 40 ft. per sec., find the work done per pound of water striking the cups.

Ans.—149 ft lb

(4) A jet of water having a velocity of 100 ft. per sec. impinges on a series of vanes moving with a velocity of 50 ft. per sec. The jet makes an angle of 30° to the direction of motion of the vanes when entering, and leaves at an angle of 120° . Draw the triangle of velocities for inlet and outlet and find (1) the angles of the vane tips so that the water enters and leaves without shock ; (2) the work done per pound of water entering the vanes ; and (3) the efficiency.

Ans.—(1) 53° , $15\frac{1}{2}^\circ$; (2) 149 ft. lb. ; (3) 96 per cent.

(5) Water flows inwards over a series of curved vanes which are fixed to the rim of a revolving wheel. The outer diameter of the vanes is 4 ft. and the inner diameter 2 ft. The angle between the jet and the wheel tangent at inlet is 30° , and the water leaves the wheel with a velocity of 10 ft. per sec. at an angle of 120° to wheel tangent. Draw the velocity triangles at inlet and outlet, and find the best angles of the blades and the work done per pound of water if the jet has a velocity of 120 ft. per sec. and the wheel makes 300 revs. per min.

Ans.— 55° ; 14° ; 208 ft. lb.

(6) A vessel provided with a jet propeller is driven at a speed of v ft. per sec. The water is discharged astern with a relative exit velocity of V ft. per sec. and the total jet area is A sq. ft. Find in terms of these quantities (a) the propelling force on the vessel ; (b) the energy expended by the jet in propulsion ; (c) the efficiency of the jet. State what conclusion can be drawn from these results, and why a vessel can be more efficiently driven by means of a screw propeller. In a jet-propelled vessel the water is discharged through two 9 in. orifices. The jet efficiency is 73 per cent, and the combined efficiency of the engine and pumps 45 per cent. Find the indicated horse-power required to drive the vessel at 13 knots. [Weight of sea water, 64 lb. per cu. ft. ; 1 knot = 1.69 ft. per sec.] (London Univ., 1912.)

Ans.—133.2 h.p.

(7) A 42-in. pipe is deflected through 90° , the ends being anchored by tie rods at right angles to the pipe at the ends of the bend. If the pipe is delivering 63 cu. ft. per sec., find the tension in each tie rod. (London Univ., 1913.)

Ans.—796 lb.

(8) A jet of water having a velocity of 50 ft. per sec., and making an angle of 45° with the horizontal impinges on a vane moving horizontally with a velocity of 25 ft. per sec. Find the shape of vane to give the best results and the angles at the entering and leaving tips.

Find the horizontal pressure on the vane per pound of water striking per second. (London Univ., 1914.)

Ans.— 73.6° ; 0; 1.47 lb.

(9) A square plate weighing 28 lb., and of uniform thickness and 12 in. edge, is hung so that it can swing freely about the upper horizontal edge. A horizontal jet $\frac{3}{4}$ in. diameter and having a velocity of 50 ft. per sec. impinges on the plate. The centre line of the jet is 6 in. below the upper edge of the plate, and when the plate is vertical the jet strikes the plate normally and at its centre. Find what force must be applied at the lower edge of the plate in order to keep the plate vertical.

If the plate is allowed to swing freely, find the inclination to the vertical which the plate will assume under the action of the jet. (London Univ., 1919.)

Ans.—7.425 lb.; 32° .

(10) A motor-boat with jet propulsion draws 10 cu. ft. per sec. through orifices amidships and discharges it astern through orifices having an effective area of .5 sq. ft. If the boat travels at 10 miles per hour, find the propelling force. (A.M.I. Mech. E., 1922.)

Ans.—103 lb.

(11) A circular jet of water delivers 2 cu. ft. per sec. with a velocity of 80 ft. per sec., and impinges tangentially on a vane moving in the direction of the jet with a velocity of 40 ft. per sec. The vane is so shaped that, if stationary, it would deflect the jet through an angle of 45° . Through what angle will it deflect the jet? What driving force will be exerted on the vane in its direction of motion? (A.M.I. Mech. E., 1922.)

Ans.— 22.5° ; 45.5 lb.

(12) A tank from which water is discharging under a constant head H , is mounted on frictionless wheels, so that the direction of motion is opposite to that of the jet, which issues from an orifice A sq. ft. in area in one side. What force in pounds applied horizontally would just prevent movement of the tank? If the tank moved with velocity v , and the jet issued with velocity V , what would then be the force causing motion, the work done per second, and the efficiency? For maximum efficiency, what will be the ratio of V to v ? (A.M.I. Civil E., 1922.)

(13) A free jet, whose sectional area is 3 sq. in., and whose velocity is 80 ft. per sec., impinges tangentially on a smooth vane which diverts its direction through 120° . What is the magnitude and direction of the resultant force on the vane. (A.M.I. Mech. E., 1926.)

Ans.—80.6 lb. at 60° .

CHAPTER X

WATER TURBINES

96. Classification of Turbines. Power was formerly obtained from water by means of water wheels which were revolved either by the weight of the water or by the impulse of the stream. Such wheels are now obsolete and have been replaced by the water turbine.

The rotation of the turbine wheel or runner is caused by water flowing over curved vanes fixed to the rim. The action of these curved blades is to change the velocity of the water, both in magnitude and direction. The impulse given to the wheel is entirely due to this change of velocity of the water flowing through it. Actually, the force tending to rotate the wheel is due to the centrifugal force of the water as it passes over the curved vane. In principle, it is the same as the outward force on a railway curve due to a train passing round the curve. No rotating force is obtained from the static pressure of the water.

Turbines may be divided into two main classes : (1) reaction or pressure turbines, and (2) impulse or velocity turbines. In the reaction turbine the water enters the wheel under pressure and flows over the vanes. In passing over the vanes the pressure head is converted to velocity head and is finally reduced to atmospheric pressure before leaving the wheel. The water leaves the wheel with a large relative velocity but a small absolute velocity, practically the whole of its original energy having been given to the wheel.

Let H = total head of entering water
and V_1 = velocity of leaving water.

Then, energy given to wheel per pound of water $= H - \frac{V_1^2}{2g}$.

In the reaction turbine the total head H consists partly of pressure head and partly of velocity head. As the water is under pressure, the wheel must run full and may, therefore, be entirely submerged below the tail race ; it may also discharge into the atmosphere or it may be placed 30 ft. above the foot of the fall and discharge into a suction or draught tube. The

water must be admitted into a reaction turbine over the whole circumference of the wheel; the power is difficult to regulate without loss.

In the impulse turbine all the energy of the water is converted into velocity before entering the wheel by expanding through a nozzle or guide vanes. The pressure of the water is atmospheric, hence the wheel must not run full; in which case, it must be placed at the foot of the fall and above the tail race. The water may be admitted over part of the circumference only or over the whole circumference.

Let V = velocity of entering water

$$\text{then, } H = \frac{V^2}{2g}$$

$$\begin{aligned} \text{Energy absorbed by wheel per pound of water} &= H - \frac{V_1^2}{2g} \\ &= \frac{V^2}{2g} - \frac{V_1^2}{2g} \end{aligned}$$

Both types of turbines may be sub-divided into classes based on the direction of flow of the water through the wheel. If the flow of the water is radial the turbine is known as a radial flow turbine and may be an inward flow or an outward flow, depending on whether the water enters at the outer circumference and flows inwards towards the centre, or enters at the centre and flows outwards. If the water flows parallel to the axis of the turbine it is known as an axial flow or parallel flow turbine. In some of the latest types of turbines the flow is partly radial and partly axial; such turbines are known as mixed flow turbines.

97. Notation. The following notation will be used for all types of turbines—

V = absolute velocity of entering water

V_1 = absolute velocity of leaving water

v = tangential velocity of wheel at inlet

v_1 = tangential velocity of wheel at outlet

V_r = velocity of water relative to wheel at inlet

V_{r_1} = velocity of water relative to wheel at outlet

V_w = velocity of whirl at inlet (Art. 93)

V_{w_1} = velocity of whirl at outlet

- V_f = velocity of flow at inlet (Art. 93)
 V_{r_1} = velocity of flow at outlet
 r = radius of wheel at inlet
 r_1 = radius of wheel at outlet
 α = angle entering water makes with wheel's tangent
 β = angle leaving water makes with wheel's tangent
 θ = angle of blade tip at inlet
 ϕ = angle of blade tip at outlet
 W = weight of water entering wheel in pounds per second
 H = total head of water supplied
 e = hydraulic efficiency of turbine
 n = number of revolutions per minute
 N = number of blades in wheel
 t = thickness of blades
 b = breadth of wheel at inlet
 b_1 = breadth of wheel at outlet

98. Reaction Turbines. (a) **OUTWARD FLOW TURBINE.** The outward radial flow turbine consists of a wheel in the shape of a cylindrical disc mounted on a shaft and having blades around the perimeter (Fig. 100). The water flows into the wheel at the centre and passes through fixed radial guide blades into the moving blades. The object of the fixed guide blades is to guide the water into the moving blades at the correct angle α . The water passes through the moving blades, causing them to rotate, and is discharged at the outer edge. The wheel is surrounded by a water-tight casing and may run in a vertical or horizontal position. It may be submerged below the tail race or placed in a suction or draught tube* above the foot of the fall. The latter position is the more convenient, as the wheel is then more accessible. Being a reaction turbine, the water in the wheel is under pressure; the wheel must, therefore, run full.

The flow of water through the wheel may be regulated by a cylindrical sluice gate situated between the moving blades and the guide blades. This is very unsatisfactory owing to the loss of head due to contraction when the gate is partly closed.

* See Fig. 116.

The revolving wheel causes a centrifugal head to be impressed on the water passing through it. This increases the relative velocity of the water in the outward flow type and consequently tends to increase the quantity of water passing through the wheel. If there is a slight increase in speed, the centrifugal head is increased and the wheel tends to race.

The efficiency is increased by discharging the water radially, in which case the velocity of whirl at outlet is zero.

The triangles of velocity for inlet and outlet are shown in Fig. 101.

It should be noted that—

$$V_w = V \cos \alpha$$

$$V_f = V \sin \alpha$$

$$V_r \sin \theta = V \sin \alpha$$

$$V_r \cos \theta = V_w - v$$

$$v = \omega r = \frac{2\pi nr}{60}$$

Also, $\frac{v}{v_1} = \frac{r}{r_1}$

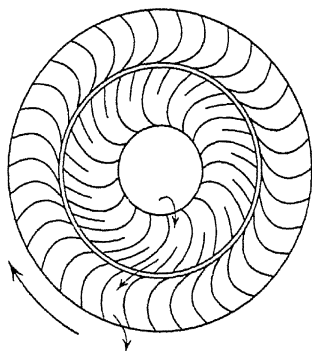


FIG. 100





FIG. 101

From velocity triangle at outlet,

$$V_{r1} \cos \phi = v_1 + V_w$$

$$V_{w1} = V_1 \cos \beta$$

$$V_{f1} = V_1 \sin \beta$$

$$V_1 \sin \beta = V_{r1} \sin \phi$$

If discharge is radial $\beta = 90^\circ$, then $V_{w1} = 0$, and $V_1 = V_r$

From Equation (1), Art. 94,

$$\left. \begin{array}{l} \text{work done on wheel per pound} \\ \text{of water} \end{array} \right\} = \frac{V_w v}{g} - \frac{V_{w_1} v_1}{g}$$

$$\left. \begin{array}{l} \text{Energy lost per pound of water} \\ \text{passing through wheel} \end{array} \right\} = H - \frac{V_1^2}{2g}$$

Therefore,

$$\frac{V_w v}{g} - \frac{V_{w_1} v_1}{g} = H - \frac{V_1^2}{2g} \quad . \quad . \quad . \quad . \quad . \quad (1)$$

It should be noted that in a reaction turbine H does not equal $\frac{V_1^2}{2g}$.

$$\begin{aligned} \text{Hydraulic efficiency} &= \frac{H - \frac{V_1^2}{2g}}{H} \\ &= \frac{V_w v - V_{w_1} v_1}{gH} \end{aligned}$$

If the discharge is radial, Equation (1) becomes

$$\frac{V_w v}{g} = H - \frac{V_1^2}{2g}$$

Radial area of flow at inlet $= (2\pi r - Nt)b = k \, 2\pi r \, b$, where k is a factor which allows for area of blades.

$$\left. \begin{array}{l} \text{Volume of water flowing} \\ \text{through wheel per second} \end{array} \right\} = (2\pi r - Nt)b \, V_f$$

Radial area of flow at outlet $= (2\pi r_1 - Nt)b_1 = k_1 \, 2\pi r_1 \, b_1$, k_1 being the blade factor at outlet.

As quantity of water flowing through wheel at inlet equals quantity flowing at outlet,

$$\frac{V_f}{V_{f_1}} = \frac{(2\pi r_1 - Nt)b_1}{(2\pi r - Nt)b} = \frac{k_1 \, 2\pi r_1 \, b_1}{k \, 2\pi r \, b}$$

(b) INWARD FLOW TURBINE. The inward radial flow reaction turbine is similar in principle to the outward flow, except that the water enters the wheel at the outer periphery and flows radially towards the centre; it then leaves the wheel in a direction parallel to the axis. The fixed guide blades surround the revolving blades externally, and the whole

is surrounded by an outer casing. The centrifugal head impressed on the water by the revolving wheel is now acting against the radial flow of the water, so that any increase in speed of the wheel will tend to reduce the quantity of flow through the wheel, and consequently reduce the power. This is an advantage, as it tends to prevent racing. The wheel may be placed below the level of the tail race or in a suction tube above the foot of the fall. The highest efficiency is obtained when the discharge is radial and when the velocity of the leaving water is as small as possible.




FIG. 102

The method of solution and the equations for an inward flow turbine are the same as given for the outward flow turbine.

(c) **AXIAL FLOW TURBINE.** In this type of reaction turbine the water enters the wheel at the side and flows parallel to the axis (Fig. 102). It is sometimes known as a parallel flow turbine. The triangles of velocity and equations for this type of turbine are the same as for the radial flow types, except that the radius of flow is now constant. Therefore,

$$v = v_1, \text{ and } V_f = V_{f_1}$$

Then,

$$\begin{aligned} \text{work done per pound of water} &= \frac{V_w v}{g} - \frac{V_{w_1} v_1}{g} \\ &= \frac{v(V_w - V_{w_1})}{g} \end{aligned}$$

It is usual for the water to leave in a direction parallel to the axis.

(d) **MIXED FLOW TURBINE.** The mixed flow reaction turbine is a combination of the inward radial flow and the axial flow, and is obtained by curving the blades in two directions. The type of blades for this turbine is shown in Fig. 103.* The water flows into the wheel radially and leaves at the centre axially.

* By courtesy of Messrs. Boving & Co.

EXAMPLE 1.

Determine the hydraulic efficiency of a low head inward flow reaction turbine in which the guide blades make angles of 25° with the tangents to the blade circle and the receiving tips of the runners are inclined 105° to the tangents. The discharge is radial, the velocity of flow constant, and the water passes on to the moving blades without shock.

Calculate the velocity of flow if the supply head is 15 ft. (London Univ., 1921.)

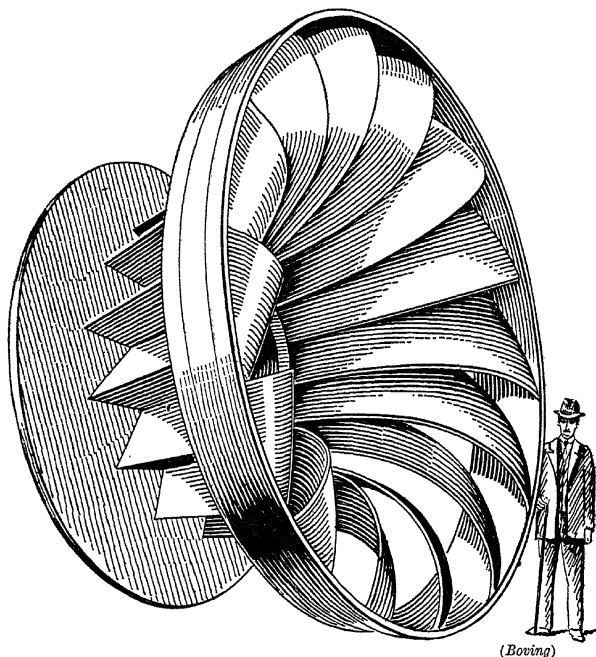


FIG 103.—RUNNER OF MIXED FLOW REACTION TURBINES

Referring to Fig. 101,

$$\alpha = 25^\circ$$

$$\theta = 105^\circ$$

$$\beta = 90^\circ$$

$$V_f = V \sin 25 = .4226 V$$

$$V_w = V \cos 25 = .9063 V$$

$$v = .9063 V - \frac{.4226 V}{\tan 105} = 1.0195 V$$

$$\begin{aligned}
 \text{As } V_{w_1} &= 0, \\
 \text{Work done} &= \frac{V_w v}{g} = \frac{.9063 V \times 1.0195 V}{g} \\
 &= \frac{.924 V^2}{g} \\
 \text{Energy rejected} &= \frac{V_1^2}{2g} = \frac{V_f^2}{2g} = \frac{(.4226 V)^2}{2g} \\
 &= \frac{.0895 V^2}{g} \\
 &= \frac{.924 V^2}{g} \\
 \text{Efficiency} &= \frac{g}{\frac{.924 V^2}{g} + \frac{.0895 V^2}{g}} = \frac{.924}{.924 + .0895} \\
 &= \frac{.924}{1.0135} = 91.15 \text{ per cent} \\
 H &= \frac{V_w v}{g} + \frac{V_f^2}{2g} \\
 \text{Or, } 15 &= \frac{1.0135 V^2}{g} \\
 \text{Then, } V &= \sqrt{\frac{15 \times 32.2}{1.0135}} \\
 &= 21.8 \text{ ft. per sec.} \\
 \text{and, } V_f &= .4226 V \\
 &= .4226 \times 21.8 \\
 &= 9.24 \text{ ft. per sec.}
 \end{aligned}$$

EXAMPLE 2.

An inward flow turbine works under a total head of 90 ft. The velocity of the wheel periphery at inlet is 50 ft. per sec. The outlet pipe of the turbine is 1 ft. diameter, and the turbine is supplied with 50 gallons of water per second. The radial velocity of flow through the wheel is the same as the velocity in the outlet pipe.

Neglecting friction, determine (a) the vane angle at inlet; (b) the guide blade angle; (c) the horse-power of the turbine. (London Univ., 1917.)

As $V_1 = V_{f_1}$ the discharge is radial.

Then, $V_{w_1} = 0$.

Assume the turbine to be a reaction turbine.

$$V_f = V_1 = \frac{\text{discharge}}{\text{pipe area}} = \frac{50}{6.24 \times .785} = 10.21 \text{ ft. per sec.}$$

$$\frac{V_w v}{g} = H - \frac{V_f^2}{2g}$$

$$\text{Then, } \frac{V_w 50}{32.2} = 90 - \frac{(10.21)^2}{64.4}$$

$$\text{and, } V_w = 56.9 \text{ ft. per sec.}$$

The triangle of velocity at inlet may now be drawn to scale and the values of θ and α measured. Or, they may be calculated from Fig. 101 as follows,

$$\tan \alpha = \frac{V_f}{V_w} = \frac{10.21}{56.9} = .1795$$

$$\text{Then, } \alpha = 10.2^\circ$$

$$\tan \theta = \frac{V_f}{V_w - v} = \frac{10.21}{6.9} = 1.47$$

$$\text{Then, } \theta = 55.8^\circ.$$

$$\begin{aligned} \text{Work done per pound of water} &= \frac{V_w v}{g} \\ &= \frac{56.9 \times 50}{32.2} = 88.38 \text{ ft. lb.} \end{aligned}$$

$$\begin{aligned} \text{H.P.} &= \frac{W \times \text{work done}}{550} \\ &= \frac{50 \times 10 \times 88.38}{550} = 80.2 \end{aligned}$$

EXAMPLE 3.

An inward flow reaction turbine is supplied with 21 cu. ft. of water per second under a head of 50 ft. It develops 100 h.p. at 375 revs. per min.; the inner and outer diameters of the wheel are 20 in. and 30 in. respectively. The velocity of the water at exit is 10 ft. per sec., and it leaves the wheel radially. Determine the actual and theoretical hydraulic efficiencies of the wheel.

If the actual hydraulic efficiency of the wheel were 84 per cent, find the most suitable angles for the guide and wheel vanes at inlet. Assume the width of wheel constant. (London Univ., 1914.)

$$v = \frac{30}{12} \times \pi \times \frac{375}{60} = 49.1 \text{ ft. per sec.}$$

$$v_1 = 49.1 \times \frac{20}{30} = 32.7 \text{ ft. per sec.}$$

As width of wheel is constant,

$$\frac{V_f}{V_{f_1}} = \frac{r_1}{r}$$

Then, $V_f = 10 \times \frac{20}{30} = 6.67 \text{ ft. per sec.}$

As discharge is radial,

$$V_1 = V_{f_1}$$

$$\left. \begin{array}{l} \text{Theoretical work done per} \\ \text{pound of water} \end{array} \right\} = H - \frac{V_1^2}{2g}$$

$$= 50 - \frac{(10)^2}{2g} = 48.45 \text{ ft. lb.}$$

$$\text{Theoretical hydraulic efficiency} = \frac{48.45}{50} = 96.9 \text{ per cent}$$

$$\left. \begin{array}{l} \text{Actual work done per pound} \\ \text{of water} \end{array} \right\} = \frac{\text{H.P.} \times 550}{W}$$

$$= \frac{100 \times 550}{21 \times 62.4} = 42 \text{ ft. lb.}$$

$$\text{Actual efficiency} = \frac{42}{50} = 84 \text{ per cent}$$

As discharge is radial,

$$\text{theoretical work done per pound} = \frac{V_w v}{g} = 48.45$$

Then, $V_w = \frac{48.45 \times 32.2}{49.1}$

$$= 31.8 \text{ ft. per sec.}$$

The values of α and θ may be found by drawing the velocity triangle at inlet to scale, or,

$$\tan \alpha = \frac{V_f}{V_w} = \frac{6.67}{31.8} = .2097$$

Hence, $\alpha = 11.9^\circ$

$$\tan (180 - \theta) = \frac{V_f}{v - V_w} = \frac{6.67}{(49.1 - 31.8)} = .385$$

Hence, $\theta = 158.9^\circ$.

EXAMPLE 4.

An outward flow reaction turbine has a speed of 200 revs. per min., and a constant breadth of 9 in. The diameter of the wheel at inlet and outlet are 5 ft. and 6 ft. respectively. The wheel works under a total head of 120 ft. and the quantity of water passing through the wheel is 200 cu. ft. per sec. If the hydraulic efficiency is 90 per cent, find the angles of the blades and guide vanes.

$$\text{Work done per pound of water} = H - \frac{V_1^2}{2g} = .9H$$

$$\begin{aligned}\text{From which, } V_1 &= \sqrt{.1 \times 64.4 \times 120} \\ &= 27.8 \text{ ft. per sec.}\end{aligned}$$

$$\begin{aligned}v &= \pi d \frac{n}{60} \\ &= \pi \times 5 \times \frac{200}{60} = 52.4 \text{ ft. per sec.}\end{aligned}$$

$$v_1 = 52.4 \times \frac{6}{5} = 62.8 \text{ ft. per sec.}$$

$$\begin{aligned}V_f &= \frac{\text{Quantity per second}}{\text{radial area of flow}} = \frac{200}{\pi d \times \frac{9}{12}} \\ &= \frac{200}{\pi \times 5 \times .75} = 17 \text{ ft. per sec.}\end{aligned}$$

$$V_{f_1} = 17 \times \frac{5}{6} = 14.2 \text{ ft. per sec.}$$

Referring to outlet triangle of Fig. 101,

$$\sin \beta = \frac{V_{f_1}}{V_1} = \frac{14.2}{27.8} = .511$$

$$\text{Hence, } \beta = 30.5^\circ$$

$$\begin{aligned}V_{w_1} &= V_1 \cos \beta = 27.8 \cos 30.5 \\ &= 23.9 \text{ ft. per sec.}\end{aligned}$$

$$\tan \phi = \frac{V_{f_1}}{v_1 + V_{w_1}} = \frac{14.2}{62.8 + 23.9} = .164$$

$$\text{Then, } \phi = 9\frac{1}{2}^\circ$$

$$\frac{V_w v}{g} - \frac{V_{w_1} v_1}{g} = eH$$

$$\text{That is, } \frac{V_w 52.4}{32.2} + \frac{(23.9 \times 62.8)}{32.2} = .9 \times 120$$

$$\text{From which, } V_w = 37.4 \text{ ft. per sec.}$$

Referring to inlet triangle of Fig. 101,

$$\tan \alpha = \frac{V_f}{V_w} = \frac{17}{37.4} = .455$$

Then, $\alpha = 24.5^\circ$

$$\tan \theta = \frac{V_f}{V_w - v} = \frac{17}{37.4 - 52.4} = -1.132$$

Therefore, $\theta = 131.5^\circ$

99. Impulse Turbines. The problems dealing with impulse turbines may be solved in a similar way to the reaction turbine problems, but the following points should be noted—

1. The turbine must not run full ; the pressure is atmospheric throughout.

2. The total head is converted to velocity before entering the wheel. Then $V = \sqrt{2gH}$. This is sometimes stated as $V = k \sqrt{2gH}$, where k is a coefficient which takes into account losses in the nozzle or guide vanes.

3. As $V = \sqrt{2gH}$, the hydraulic efficiency may be stated as $\frac{V^2 - V_1^2}{V^2}$.

4. The velocities of flow V_f and V_{f_1} depend on the radial area and on the amount the wheel is full.

(a) **RADIAL FLOW TURBINE.** The flow may be inwards or outwards. The water enters the wheel through fixed guide blades as in the reaction turbine. As the water flows over the moving vanes, a centrifugal head is impressed on it by the revolving wheel, which is immediately converted to velocity head. This increases the relative velocity of the water in an outward flow and decreases it in an inward flow. The centrifugal head given to the water was proved in Art. 26 to be

$$\frac{v^2}{2g} - \frac{v_1^2}{2g}$$

Then, $\frac{V_r^2}{2g} = \frac{V_{r_1}^2}{2g} - \left(\frac{v^2}{2g} - \frac{v_1^2}{2g} \right) \quad . \quad . \quad . \quad . \quad (1)$

If the flow is inward, the relative velocity is thus reduced by the centrifugal force. This makes the speed of the inward flow turbine easier to control than that of the outward flow.

A small increase of speed of the wheel due to a temporary lightening of the load, increases the centrifugal force, which decreases the flow through the wheel and consequently decreases the power. The wheel thus tends to automatically adjust itself to the load. With the outward flow turbine, the centrifugal force increases the flow and the wheel tends to race.

The radial flow impulse turbine is not suitable for very low

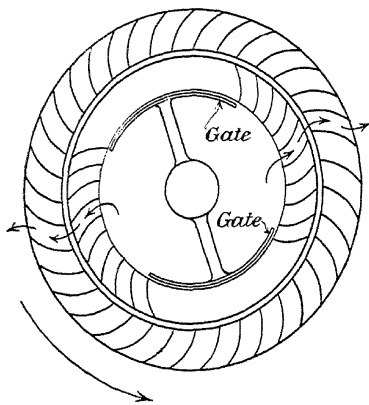


FIG. 104

falls, as the wheel must be placed above the foot of the fall in order that it does not run full. A certain amount of the fall is thus lost. In a high fall this amount is not noticeable. The efficiency is greatest when V_1 is as small as possible.

In an impulse turbine it is possible to regulate the flow through the wheel without loss. The water need not be admitted over the whole circumference, as the

pressure is atmospheric. The flow may therefore be regulated by means of a revolving gate (Fig. 104), which, when turned, completely shuts off the flow in the vanes covered by it, without interfering with the flow in the remaining vanes.

This method of regulating the flow is used in the Girard impulse turbine. In this type, the water is admitted to two opposite quadrants of the wheel when the revolving gate is fully open, the remaining two quadrants being covered by the gate.

(b) AXIAL FLOW TURBINE. The same conditions governing the radial flow impulse turbine apply to the axial flow impulse turbine. Except that in this type there is no centrifugal head impressed on the water as $v = v_1$; therefore the relative velocity is constant.

Or,
$$V_r = V_{r_1}$$

The maximum efficiency occurs when V_1 is as small as possible.

The chief types of axial flow impulse turbines are the Girard and the Pelton wheel. The latter type differs from the ordinary turbine and is dealt with separately in Art. 101.

EXAMPLE 1.

The mean blade circle diameter of the runner of an axial flow impulse turbine of the Girard type is $4\frac{1}{2}$ ft. The guide blade angle is 24° , the receiving and discharging angles of the runner blades being 48° and 23° respectively. The breadth of the moving blades at inlet is 4 in.

Calculate the speed of the turbine so that the water may pass smoothly on to the blades when the turbine is working under a head of 280 ft., and find the horse-power developed if, with full circumferential admission, the passages are 85 per cent full at inlet. (London Univ., 1921.)

The velocity triangles are shown in Fig. 105.

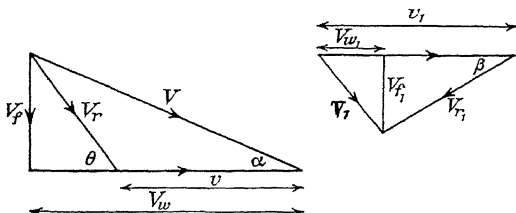


FIG. 105

$$V = \sqrt{2gH} = \sqrt{64.4 \times 280} = 134 \text{ ft. per sec.}$$

$$V_f = V \sin 24^\circ = 134 \times .4067 = 54.5 \text{ ft. per sec.}$$

$$V_w = V \cos 24^\circ = 134 \times .9135 = 122.3 \text{ ft. per sec.}$$

$$v = V_w - \frac{V_f}{\tan 48^\circ} = 122.3 - \frac{54.5}{1.1106} = 73.2 \text{ ft. per sec.}$$

$$v_1 = v, \text{ as the turbine is an axial flow.}$$

$$v = \pi d \frac{n}{60}$$

$$\text{That is, } 73.2 = \pi \times 4.5 \times \frac{n}{60}$$

$$\text{From which, } n = 311 \text{ revs. per min.}$$

$$V_r = \frac{V_f}{\sin 48^\circ} = \frac{54.5}{.7431} = 73.2 \text{ ft. per sec.}$$

$$V_{r_1} = V_r = 73.2 \text{ ft. per sec.,}$$

as the turbine is an axial flow impulse.

$$\begin{aligned}
 V_{w_1} &= v_1 - V_{r_1} \cos 23 \\
 &= 73.2 - (73.2 \times .9205) = 5.8 \text{ ft. per sec.}
 \end{aligned}$$

$$\begin{aligned}
 \text{Work done per pound} &= \frac{V_w v}{g} - \frac{V_{w_1} v_1}{g} \\
 &= \frac{(122.3 \times 73.2)}{32.2} - \frac{(5.8 \times 73.2)}{32.2} \\
 &= 265 \text{ ft. lb.}
 \end{aligned}$$

$$\begin{aligned}
 \text{Quantity of water per second} &= b \times \pi d \times V_f \times .85 \\
 &= \frac{4}{12} \times \pi \times 4.5 \times 54.5 \times .85 \\
 &= 218 \text{ cu. ft. per sec.}
 \end{aligned}$$

$$\begin{aligned}
 \text{Horse-power} &= \frac{W \times \text{work done per lb.}}{550} \\
 &= \frac{218 \times 62.4 \times 265}{550} \\
 &= 6550
 \end{aligned}$$

EXAMPLE 2.

In an outward-flow impulse turbine the available head is 81 ft. The rim speed of the wheel at inlet is $.4\sqrt{2gH}$, guide vane angle and wheel vane angle at outlet are 20° , inlet radius .75 ft., outlet radius 1 ft. The velocity of the water in the guides is 95 per cent of the theoretical velocity due to total head. The losses in the wheel to be taken as 6 per cent of total head. Find the hydraulic efficiency.

If the depth of the guides is .25 ft., what would be the horse-power of the turbine if used with admission over one-quarter of the circumference, allowing 10 per cent loss of area due to vanes? (London Univ., 1913.)

Referring to velocity triangles of Fig. 101,

$$v = .4\sqrt{2gH} = .4\sqrt{64.4 \times 81} = 28.95 \text{ ft. per sec.}$$

$$v_1 = \frac{vr_1}{r} = 28.95 \times \frac{1}{.75} = 38.6 \text{ ft. per sec.}$$

$$V = .95\sqrt{2gH} = .95\sqrt{64.4 \times 81} = 68.6 \text{ ft. per sec.}$$

$$V_w = V \cos 20 = 68.6 \times .9397 = 64.5 \text{ ft. per sec.}$$

$$V_f = V \sin 20 = 68.6 \times .342 = 23.45 \text{ ft. per sec.}$$

$$\tan \theta = \frac{V_f}{V_w - v} = \frac{23.45}{64.5 - 28.95} = .66$$

$$\text{Then, } \theta = 33.4^\circ$$

$$V_r = \frac{V_f}{\sin \theta} = \frac{23.45}{.5505} = 42.6 \text{ ft. per sec.}$$

Using Equation (1), Art. 99, and allowing for 6 per cent of total head loss in vanes,

$$\frac{V_{r_1}^2}{2g} = \frac{V_r^2}{2g} - \left(\frac{v^2}{2g} - \frac{v_1^2}{2g} \right) - .06H$$

That is, $V_{r_1}^2 = 42.6^2 - (28.95^2 - 38.6^2) - (.06 \times 2g \times 81)$

From which, $V_{r_1} = 46.5$ ft. per sec.

$$\begin{aligned} V_{w_1} &= V_{r_1} \cos 20 - v_1 \\ &= (46.5 \times .9397) - 38.6 \\ &= 5 \text{ ft. per sec.} \end{aligned}$$

$$\begin{aligned} \text{Work done per pound} &= \frac{V_w v}{g} + \frac{V_{w_1} v_1}{g} \\ &= \frac{(64.5 \times 28.95)}{32.2} + \frac{(5 \times 38.6)}{32.2} \\ &= 64 \text{ ft. lb.} \end{aligned}$$

$$\begin{aligned} e &= \frac{\text{Work done per pound}}{\frac{V^2}{2g}} = \frac{64 \times 64.4}{(68.6)^2} \\ &= 87.5 \text{ per cent} \end{aligned}$$

$$\begin{aligned} \left. \begin{array}{l} \text{Radial area of flow} \\ \text{at inlet} \end{array} \right\} &= \pi d b \times \frac{1}{4} \times \frac{90}{100} \\ &= \pi \times 1.5 \times .25 \times \frac{1}{4} \times \frac{90}{100} \\ &= .265 \text{ sq. ft.} \end{aligned}$$

$$\begin{aligned} \left. \begin{array}{l} \text{Quantity of water} \\ \text{per second} \end{array} \right\} &= .265 V_r \\ &= .265 \times 23.45 = 6.22 \text{ cu. ft.} \end{aligned}$$

$$\begin{aligned} \text{Horse-power} &= \frac{W \times \text{work done per pound}}{550} \\ &= \frac{6.22 \times 62.4 \times 64}{550} \\ &= 45.1 \end{aligned}$$

100. **Summary of Equations for Turbine Problems.** The following is a tabulated summary of equations and conditions governing all classes of turbines, which will be useful for reference when solving problems on turbines—

	IMPULSE.	REACTION.
Radial and axial flow	$V = \sqrt{2gH}$ $\text{Work done } \left\{ \begin{array}{l} = \frac{V_w v}{g} - \frac{V_{w_1} v_1}{g} \\ = \frac{V^2}{2g} - \frac{V_1^2}{2g} \end{array} \right.$ $\text{Hydraulic eff.} = \frac{V^2 - V_1^2}{V^2}$ <p>Wheel must not run full. V_f depends on area of flow and on amount full. Pressure is atmospheric</p>	$\text{Work done } \left\{ \begin{array}{l} = \frac{V_w v}{g} - \frac{V_{w_1} v_1}{g} \\ = H - \frac{V_1^2}{2g} \\ = \frac{H - \frac{V_1^2}{2g}}{H} \end{array} \right.$ $\text{Hydraulic eff.} = \frac{H - \frac{V_1^2}{2g}}{H}$ <p>Wheel must run full. V_f depends on area of flow. <u>Pressure varies throughout</u></p>
Radial flow only	$\frac{v_1}{v} = \frac{r_1}{r}$ $\frac{V_{r_1}^2}{2g} = \frac{V_r^2}{2g} \pm \left(\frac{v^2}{2g} - \frac{v_1^2}{2g} \right)$	$\frac{v_1}{v} = \frac{r_1}{r}$
Axial flow only	$v = v_1$ $V_{r_1} = V_r$	$v = v_1$

101. **Types of Turbines.** (a) **BARKER'S MILL OR SCOTCH TURBINE.** This is a simple type of reaction turbine which is now obsolete.* It consists of a revolving cylindrical tank having arms through which the water is discharged backwards, as shown in Fig. 106. Problems on this type of turbine may be solved from the ordinary methods applied to reaction turbines. The velocity diagrams for inlet and outlet may be drawn in the same manner as in Fig. 101. It should be noted that the arm corresponds to the moving vane. As the water enters the vane radially and at the centre,

$$\alpha \text{ and } \theta = 90^\circ$$

$$v = 0$$

$$V_f = V_r = V$$

The triangle at inlet thus becomes a radial line as shown in Fig. 107.

* It has recently been revived as a lawn sprinkler.

Consider the velocity triangle at outlet. As the water leaves tangentially,

$$\beta \text{ and } \phi = 0$$

$$V_{w_1} = V_1$$

$$V_{f_1} = 0$$

The velocity triangle at outlet is thus a horizontal line (Fig. 107), from which,

$$V_{r_1} = v_1 + V_1 \quad (1)$$

Work done per pound of water

$$= \frac{V_w v}{g} + \frac{V_{w_1} v_1}{g}$$

$$= 0 + \frac{(V_{r_1} - v_1)v_1}{g}$$


(From Eq. 1)

$$= H - \frac{V_1^2}{2g}$$

where H = head of water in tank.

$$\left. \begin{array}{l} \text{Total energy supplied} \\ \text{per pound of water} \end{array} \right\} = H = \frac{(V_{r_1} - v_1)v_1}{g} + \frac{V_1^2}{2g}$$

$$V = V_r = V_f$$



Outlet Triangle.

Inlet Triangle

FIG. 107

Substituting for V_1 from Equation 1,

$$H = \frac{(V_{r_1} - v_1)v_1}{g} + \frac{(V_{r_1} - v_1)^2}{2g}$$

$$= \frac{V_{r_1}^2 - v_1^2}{2g}$$

Efficiency

$$= \frac{2(V_{r_1} - v_1)v_1}{V_{r_1}^2 - v_1^2} = \frac{2v_1}{V_{r_1} + v_1}$$

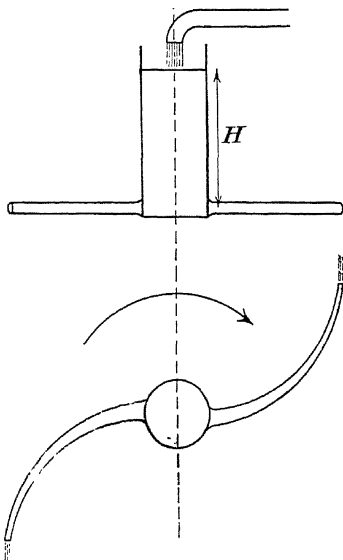


FIG. 106

(b) **FOURNEYRON TURBINE.** This is an outward radial flow reaction type and was the first successful reaction turbine to be made. It has been used for heads of 1 ft. to 360 ft. and has an efficiency of about 75 per cent. It is governed by a cylindrical sluice gate which fits between the moving and fixed blade rings. As throttling the supply in this way causes a loss of head due to sudden contraction, transverse diaphragms are fitted through the blades which divide the wheel into four sections, as shown in Fig. 108. The cylindrical gate may then close one or more sections completely without causing any loss of head.

(c) **FRANCIS TURBINE.** The Francis turbine is an inward flow radial reaction type and was the first type of inward

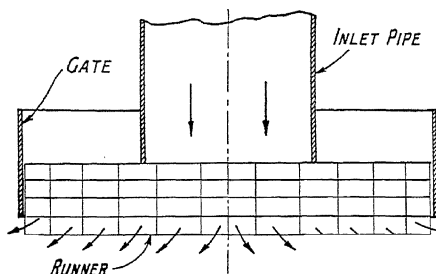


FIG. 108

flow to be constructed. This has the advantage of the centrifugal force acting against the flow, which reduces the tendency to race. The flow is regulated by a sliding cylindrical sluice gate placed inside or outside of the blade ring.

(d) **THOMSON TURBINE.** This is an inward flow reaction turbine. The turbine wheel is surrounded by an eccentric chamber called a vortex chamber (Fig. 109). The water enters the wheel at the largest part of the chamber and is guided to the moving blades by four pivoted guide blades. The flow may then be regulated by closing up the guide blades, which varies the supply to the whole of the wheel's circumference. No loss of head then occurs, as there is no contraction of section. The width of the wheel is varied, so that the radial area of discharge equals the radial area at inlet; the velocity of flow is, therefore, constant.

(e) JONVAL TURBINE. The Jonval is an axial flow impulse turbine. The simplest type consists of one horizontal ring of moving blades into which the water is directed by guide vanes placed above. The flow is regulated by a horizontal sluice which closes parts of the wheel.

A later type of Jonval wheel consisted of several concentric rings of moving blades. The power may then be regulated by closing one or more rings completely.

The invention of the suction tube is also due to Jonval.

(f) GIRARD TURBINE. There are two types of Girard turbines, an axial flow and a radial flow; both are impulse

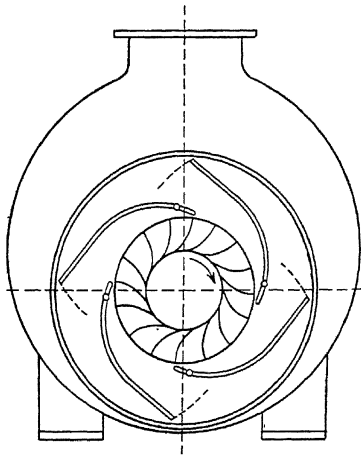


FIG. 109

wheels. They may be used for heads up to 1,700 ft. and have an over-all efficiency of about 75 per cent. The guide passages do not extend over the whole circumference but over two opposite quadrants. The water supply is varied by a sliding circular sluice gate (Fig. 104) which completely shuts off the flow through the vanes it covers. By turning this sluice the flow may be stopped through as many vanes as required. This prevents any loss of head due to contraction when running at "part gate." The wheel of the axial flow is usually placed vertical, the radial flow may be horizontal or vertical.

(g) PELTON WHEEL. The Pelton wheel is a special type of axial flow impulse turbine and is used for very high heads. It is the most efficient type of impulse wheel, having an overall efficiency of 84 per cent. This type of wheel has been evolved from an earlier type of water wheel used in the mines of California.

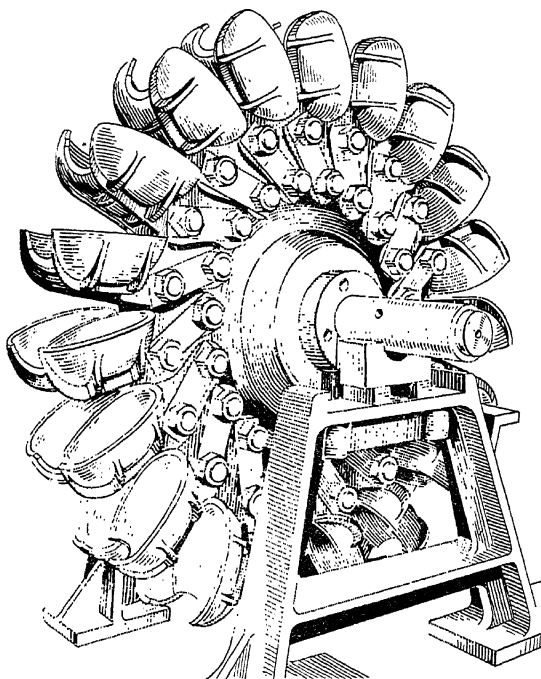


FIG. 110.—PELTON WHEEL

The jet impinges on the wheel from one or more nozzles and strikes the blade at the centre (Fig. 110), flowing axially in both directions. The blades are known as buckets and consist of a double hemispherical cup (Fig. 111). As the water flows axially in both directions, there is no axial thrust on the wheel.

The flow of water through the wheel may be regulated by a throttle valve in the supply pipe or by a needle valve in the

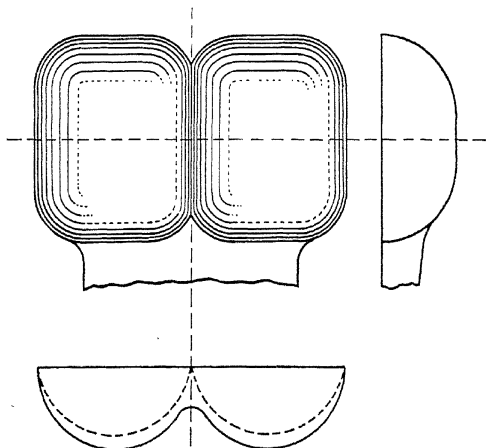


FIG. 111.—PELTON WHEEL BUCKETS (EXTERNAL VIEWS)

nozzle. The buckets are so shaped that the jet is discharged backwards. Usually, the total deflection of the bucket is 160°

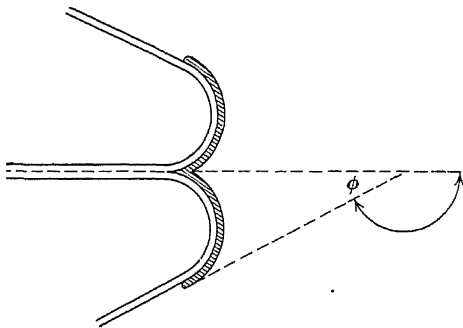


FIG. 112.

(Fig. 112). An arrangement of a Pelton wheel, showing nozzles, made by Sir W. G. Armstrong, Whitworth & Co., is shown in Fig. 113.

The work done and efficiency of the Pelton wheel may be obtained from the velocity triangles as in the case of an ordinary axial flow impulse turbine.

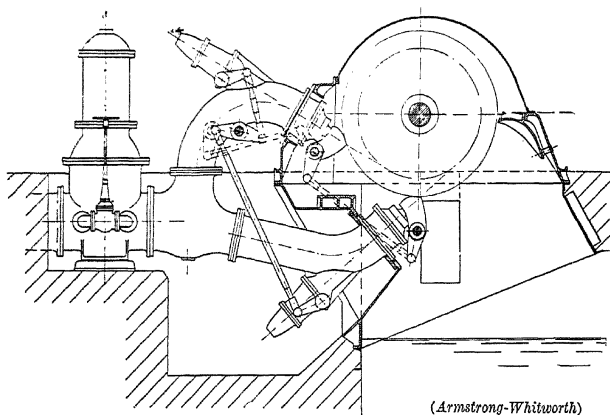


FIG. 113.—ARRANGEMENT OF PELTON WHEEL

For a Pelton wheel,

$$\theta = 0$$

Also,

$$\alpha = 0$$

Then, velocity triangle at inlet is a horizontal straight line, as shown in Fig. 114.





FIG. 114



Hence,

$$V_r = V - v$$

And,

$$V_w = V = \sqrt{2gH}$$

$$V_f = 0$$

From triangle at outlet (Fig. 114),

$$v_1 = v$$

$$V_{r1} = V_r = V - v$$

$$V_{w1} = V_{r1} \cos \phi - v_1$$

$$= (V - v) \cos \phi - v$$

$$V_{r1} = V_r$$

$$\begin{aligned}
 \left. \begin{array}{l} \text{Work done per pound} \\ \text{of water} \end{array} \right\} &= E = \frac{V_w v}{g} - \frac{V_{w_1} v_1}{g} \\
 &= \frac{V v}{g} + \frac{[(V - v) \cos \phi - v]v}{g} \\
 &= \frac{1}{g} [Vv + v(V - v) \cos \phi - v^2] \quad (1) \\
 &= eH \\
 &= H - \frac{V_1^2}{2g}
 \end{aligned}$$

The best speed of the wheel will be when the work done per pound of water is a maximum. Differentiating Equation (1) for a maximum,

$$\frac{dE}{dv} = V + (V - 2v) \cos \phi - 2v = 0$$

$$\text{From which,} \quad V(1 + \cos \phi) - 2v(1 + \cos \phi) = 0$$

$$\text{Hence,} \quad v = \frac{V}{2}$$

Therefore, the speed of the wheel for maximum efficiency will be equal to half the speed of the jet.

In practice it is found that the maximum efficiency is when the speed of the wheel is $\cdot 46V$.

$$\begin{aligned}
 \text{Efficiency} &= \frac{\frac{1}{g} [Vv + v(V - v) \cos \phi - v^2]}{\frac{V^2}{2g}}
 \end{aligned}$$

$$\text{Putting} \quad v = \frac{V}{2},$$

$$\begin{aligned}
 \text{Maximum efficiency} &= \frac{2 \left[\frac{V^2}{2} + \frac{V^2}{4} \cos \phi - \frac{V^2}{4} \right]}{V^2} \\
 &= \frac{1}{2} (1 + \cos \phi)
 \end{aligned}$$

When $\phi = 0$, the efficiency is equal to unity.

It will be noticed that the deviation of the jet is $180 - \phi$.

The following rules are used for the proportions of the buckets—

Let	d = diameter of jet
Depth of bucket	= $1.2d$
Width of bucket	= $5d$

The number of buckets may be obtained by arranging them so that the jet is always completely intercepted by a bucket.

Let R be the mean radius of bucket circle and γ be the angle subtended by two adjacent buckets (Fig. 115). If the jet is to be always intercepted, one bucket will be just about to move out of the jet as another has just moved in.

Let b , c , and e be adjacent buckets. As jet is moving at twice the speed of the buckets, a section of jet will move from c to e

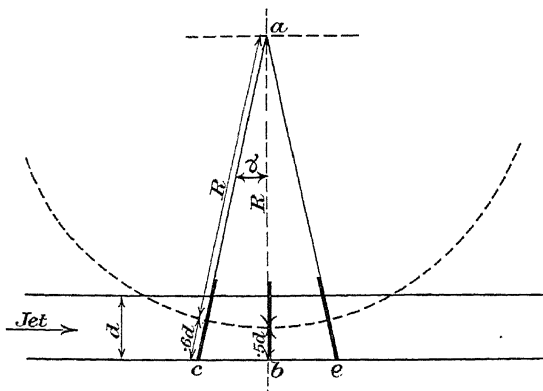


FIG. 115

in same time as bucket b moves to e . Hence, for jet to be always intercepted, the buckets will be as shown in Fig. 115.

Consider triangle abc ,

$$ac = R + \frac{1}{2} \text{ depth of bucket} = R + .6d$$

$$ab = R + \frac{1}{2} \text{ diameter of jet} = R + .5d$$

Then, $\cos \gamma = \frac{R + .5d}{R + .6d}$

From which equation γ is obtained.

Then, number of buckets* $= \frac{360}{\gamma}$

Pelton wheels are in use with heads as large as 5,000 ft.

* This equation does not hold in practice as there is not sufficient space around the wheel perimeter for this number of buckets to be inserted. Actually, the number of buckets is about half of that given by the equation.

EXAMPLE 1.

A cup, similar to that in a Pelton wheel, deflects a jet of water through an angle of 120° . Determine the speed of the cup in terms of the velocity of the jet so that the work done by the jet on the cup shall be a maximum and express this work as a percentage of the energy of the jet.

Show how the speed necessary for maximum efficiency would be affected if the friction of the water in passing over the surface of the cup were considerable. (London Univ., 1921.)

Referring to Figs. 112 and 113,

$$\phi = 180 - 120 = 60^\circ$$

$$\begin{aligned} \left. \begin{array}{l} \text{Work done per pound} \\ \text{of water} \end{array} \right\} &= E = \frac{V_w v}{g} - \frac{V_{w1} v_1}{g} \\ &= \frac{Vv}{g} + \frac{v(V-v) \cos 60 - v^2}{g} \end{aligned}$$

Differentiating for a maximum,

$$\frac{dE}{dv} = V + V \cos 60 - 2v \cos 60 - 2v = 0$$

$$\text{Hence,} \quad V(1 + \cos 60) - 2v(1 + \cos 60) = 0$$

$$\text{Therefore,} \quad v = \frac{V}{2}$$

Then,

$$\left. \begin{array}{l} \text{maximum work done} \\ \text{per pound of water} \end{array} \right\} = \frac{\frac{1}{2}V^2 + \frac{1}{4}V^2 \cos 60 - \frac{1}{4}V^2}{g}$$

$$= \frac{\frac{3}{8}V^2}{g}$$

$$\text{Energy supplied} = \frac{V^2}{2g}$$

$$\begin{aligned} \text{Efficiency} &= \frac{\frac{3}{8}V^2}{\frac{V^2}{2g}} \\ &= \frac{g}{V^2} = .75 \end{aligned}$$

If there is no friction over the cup, the relative velocity at exit equals relative velocity at entrance. Let friction reduce relative velocity at exit to $k \times V$,

Then, relative velocity at exit $= k(V - v)$,
 and, $V_{w_1} = k(V - v) \cos 60 - v$
 Work done per pound of water $\left. \vphantom{\begin{matrix} V_{w_1} \\ \cos 60 \end{matrix}} \right\} = E = \frac{Vv}{g} + \frac{[k(V - v) \cos 60 - v]v}{g}$
 $= \frac{Vv}{g} + \frac{vk(V - v) \cos 60 - v^2}{g}$

Differentiating for a maximum,

$$\frac{d.E}{dv} = V + Vk \cos 60 - 2vk \cos 60 - 2v = 0$$

Or, $V(1 + k \cos 60) - 2v(1 + k \cos 60) = 0$

From which, $v = \frac{V}{2}$

Therefore, the speed for maximum efficiency is not affected by the friction of the water passing over the cup.

EXAMPLE 2.

A Pelton wheel is required to work under a head of 130 ft., and to develop 100 h.p. at 250 revs. per min. Assuming an efficiency of 80 per cent and a coefficient of velocity of .98, find the jet diameter, the diameter of the bucket circle, the size of the buckets, and the number of buckets required. (London Univ., 1919.)

$$\begin{aligned} V &= .98 \sqrt{2gH} \\ &= .98 \sqrt{64.4 \times 130} = 89.5 \text{ ft. per sec.} \end{aligned}$$

For maximum efficiency,

$$\begin{aligned} v &= .46V \quad (\text{Practical value}) \\ &= .46 \times 89.5 = 41.3 \text{ ft. per sec.} \end{aligned}$$

$$\text{Horse-power} = \frac{.8WH}{550}$$

Hence, $W = \frac{100 \times 550}{130 \times .8} = 530 \text{ lb. per sec.}$

Let d = diameter of jet
 and D = diameter of bucket circle

Then, $v = \pi D \frac{n}{60}$

From which, $D = \frac{41.3 \times 60}{\pi \times 250} = 3.16 \text{ ft.}$

Quantity of water flowing per second $\left. \vphantom{\begin{matrix} \pi \\ d^2 \end{matrix}} \right\} = \frac{\pi}{4} d^2 V = \frac{W}{w}$

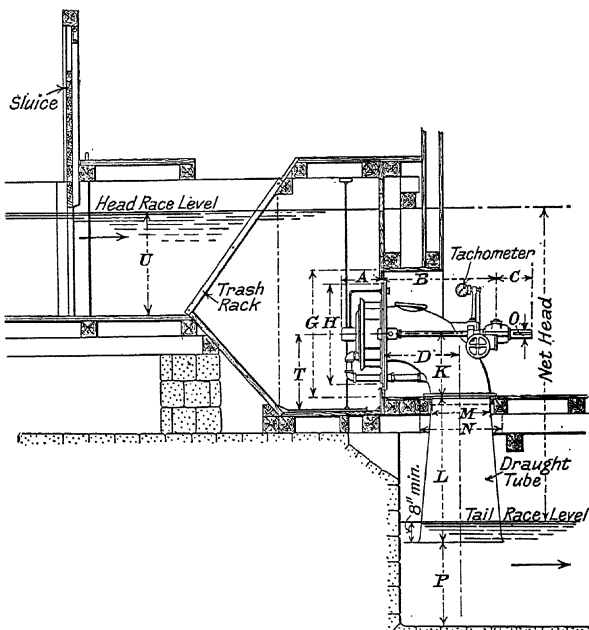
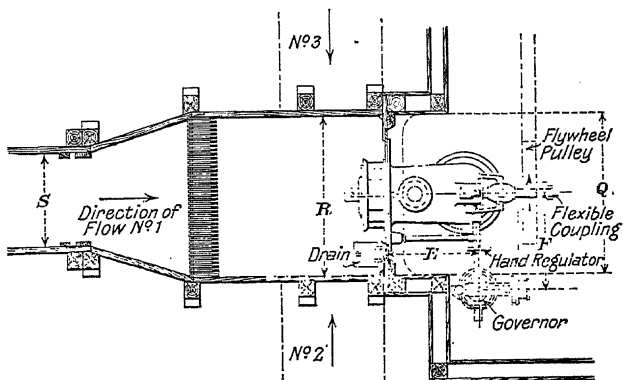


FIG. 116

(Armstrong-Whitworth)

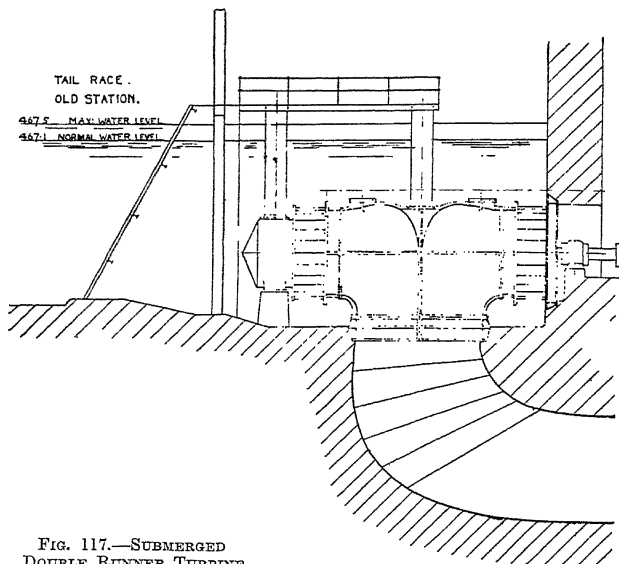


FIG. 117.—SUBMERGED
DOUBLE RUNNER TURBINE

(Armstrong-Whitworth)

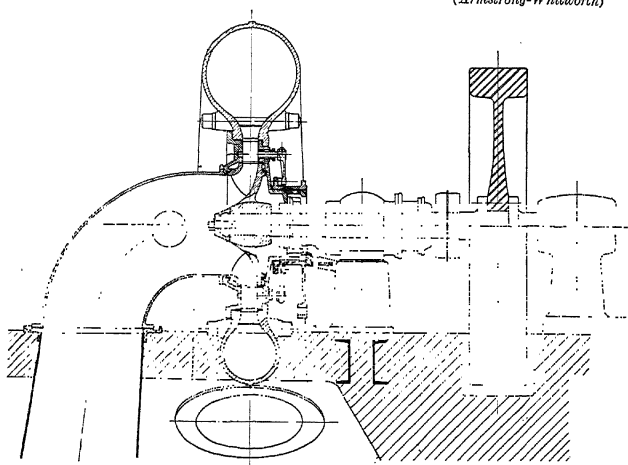


FIG. 118.—FRANCIS TURBINE

(Armstrong-Whitworth)

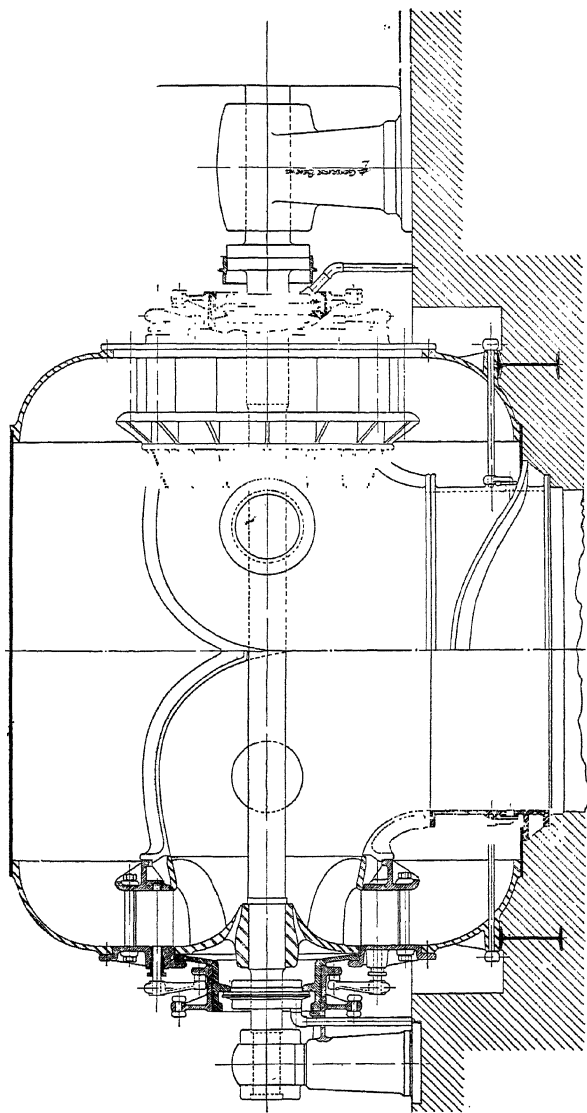


FIG. 119.—TWIN FRANCIS IN CYLINDRICAL CASING

(Armstrong-Whitworth)

$$\text{Hence,} \quad d^2 = \frac{530 \times 4}{\pi \times 62.4 \times 89.5}$$

$$d = .347 \text{ ft.}$$

$$= 4.17 \text{ in.}$$

$$\begin{aligned} \text{Depth of bucket} &= 1.2d \\ &= 1.2 \times 4.17 = 5 \text{ in.} \end{aligned}$$

$$\begin{aligned} \text{Width of bucket} &= 5d \\ &= 5 \times 4.17 = 20.8 \text{ in.} \end{aligned}$$

For number of buckets,

$$\begin{aligned} \cos \gamma &= \frac{R + .5d}{R + .6d} \\ &= \frac{18.96 + 2.08}{18.96 + 2.5} = .982 \end{aligned}$$

From which, $\gamma = 11^\circ$

$$\begin{aligned} \text{Then,} \\ \text{number of blades} \end{aligned} \left\{ \begin{aligned} &= \frac{360}{11} = 34 \end{aligned} \right.$$

102. Some Modern Turbines. A diagram of a turbine installation and views of some large modern turbines are shown in Figs. 116 to 119; these turbines were designed and constructed by the Hydro-electric Department of Sir W. G. Armstrong, Whitworth & Co., Ltd. Fig. 116 shows the installation of a small estate turbine for a low head; the suction or draught tube is clearly shown.

Fig. 117 shows a submerged double-runner turbine. A modern Francis turbine is shown in Fig. 118; and a twin Francis turbine in cylindrical casing in Fig. 119.

103. Specific Speed of a Turbine. The specific speed of a water turbine is the speed at which the turbine will run when producing one horse-power under a head of 1 ft. of water. This is sometimes called the Unit Speed or the Type Characteristic of the turbine. Within certain limits each type of turbine will have its own value for the specific speed; hence, if the specific speed is known it is possible to judge the type of turbine.

An equation for the specific speed of a turbine can be obtained by applying the principle of similarity to water turbines. It will be assumed that all turbines are similar; that is, that all their linear dimensions are in proportion, and the blade angles are constant.

Let D = diameter of turbine in feet

n_s = specific speed of turbine in revs. per min.

P = horse-power developed.

Then, using the notation of Art. 97,

$$v = \frac{\omega D}{2}$$

From which, $D \propto \frac{v}{\omega}$

But, $\omega \propto n$

And, from inlet triangle of any turbine,

$$v \propto V$$

That is, $v \propto \sqrt{H}$ (as $V \propto \sqrt{H}$)

Hence, $D \propto \frac{\sqrt{H}}{n}$ (1)

Assuming linear dimensions of turbines to be similar,

$$b \propto D$$

Hence, from (1), $b \propto \frac{\sqrt{H}}{n}$ (2)

From inlet triangle of any turbine,

$$V_f \propto V$$

That is, $V_f \propto \sqrt{H}$ (as $V \propto \sqrt{H}$) (3)

$$\left. \begin{array}{l} \text{Quantity per sec.} \\ \text{passing through turbine} \end{array} \right\} = \text{radial area of flow} \times \text{vel. of flow}$$

$$= \pi D b \times V_f$$

Substituting from equations (1), (2), and (3),

$$\begin{aligned}\text{Quantity per sec.} & \propto \frac{\sqrt{H}}{n} \times \frac{\sqrt{H}}{n} \times \sqrt{H} \\ & \propto \frac{H^{\frac{3}{2}}}{n^2}\end{aligned}$$

Weight of water per sec. = $W = w \times \text{quantity per sec.}$,

$$\text{Or,} \quad W \propto \frac{H^{\frac{3}{2}}}{n^2} \quad . \quad . \quad . \quad . \quad (4)$$

$$\text{Now, horse-power of turbine} = \frac{WH}{550}$$

$$\begin{aligned}\text{Hence, from Eq. (4),} \quad P & \propto \frac{H^{\frac{3}{2}}}{n^2} \times H \\ & \propto \frac{H^{\frac{5}{2}}}{n^2}\end{aligned}$$

$$\text{Or,} \quad n \propto \frac{H^{\frac{5}{4}}}{\sqrt{P}}$$

$$\text{That is,} \quad n = k \frac{H^{\frac{5}{4}}}{\sqrt{P}}$$

Where k is a constant depending on the type of turbine.

When the turbine is developing 1 horse-power under a head of 1 ft., it will be noticed that k is equal to n which, under these conditions, is known as the specific speed n_s .


$$\text{Hence,} \quad k = n_s$$

$$\text{Hence,} \quad n_s = \frac{n \sqrt{P}}{H^{\frac{5}{4}}} \quad . \quad . \quad . \quad . \quad (5)$$

It is found that for impulse turbines n_s lies between 3 and 10, for reaction turbines the value of n_s is between 10 and 100. The n_s for a Pelton wheel is about 4.

Suppose it is required to install a water turbine to work at a given speed, under a given head, and to produce a given

horse-power. Then, putting these quantities in Equation 5 the specific speed is obtained. If this has a value of between 10 and 100, a reaction turbine should be used; if the value is less than 10, an impulse turbine or Pelton wheel should be

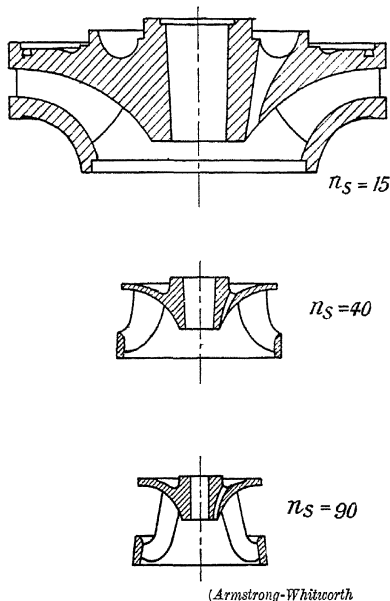

(Armstrong-Whitworth)

FIG. 120.—TYPES OF REACTION TURBINE RUNNERS
Showing comparative sizes of runners for same output under unit head

used. If the value is more than 100, then two or more, reaction turbines would be required.

In Fig. 120* are shown the proportion of the runners of three reaction turbines, each of different specific speeds; the efficiency curves of the same turbines are shown plotted in Fig. 121.

EXAMPLE.

Deduce an expression for the specific speed of a reaction turbine. Under a head of 40 ft. the maximum feasible specific speed is 100. If, under this head, an installation of 20,000 h.p. is required, and if the speed is to be 150 revs. per min., how many units should be used? (A.M.I. Mech. E., 1925.)

* By courtesy of Sir W. G. Armstrong, Whitworth & Co.

Using Equation 5,

$$n_s = \frac{n\sqrt{P}}{H^{\frac{5}{4}}}$$

That is,

$$100 = \frac{150\sqrt{P}}{40^{\frac{5}{4}}}$$

From which,

$$P = 4,500 \text{ per unit}$$

No. of units

$$\begin{aligned} &= \frac{20,000}{4,500} \\ &= 5 \end{aligned}$$

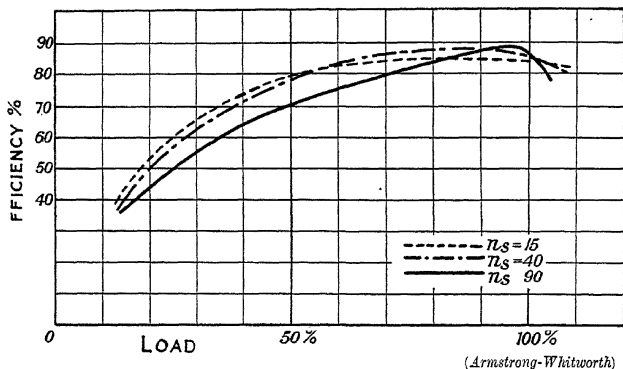


FIG. 121.—EFFICIENCY CURVES FOR REACTION TURBINE RUNNERS

104. Governing of Turbines. The speed of a water turbine is regulated by means of a centrifugal governor of a similar type to that used on a steam engine. The governor controls the water supply by operating sliding gates as explained in Arts. 98, 99, and 101, or by operating pivoted guide vanes, as shown in Fig. 109. The centrifugal governor is not powerful enough to move the gates unaided on account of their weight, and a mechanism is installed which, when operated by the centrifugal governor, is of sufficient power to move the heavy gates. This method is known as relay governing.

The earliest method of relay governing was by means of a system of open and crossed belts on fast and loose pulleys driven from the turbine shaft. The belts were moved from

the fast to the loose pulleys by the centrifugal governor. This is similar to the belt drive for the return motion of an engineer's planing machine.

Modern types of relay governors consist of a differential cylinder worked by water or oil pressure. A diagrammatic view of a differential cylinder is shown in Fig. 122. The relay piston is larger at one end than at the other, the relay cylinder being correspondingly shaped to suit. Oil or water is kept at a constant pressure in the annular space *B*. The pressure of the oil or water in the space *A* is regulated by the centrifugal governor. When the turbine is running steady, the total pressure at *A* equals the total pressure at *B* and the piston is then in equilibrium. If the turbine speeds up, the centrifugal governor operates the oil valve and admits high pressure oil




FIG. 122

in *A*; this forces the piston to the right, and the piston rod *C* will cause the gate to partly close. If the turbine slows down, the centrifugal governor exhausts the oil in *A*, the piston is then forced to the left by the oil pressure in *B*, and the gate will open farther.

In all modern makes of this type of relay governor oil is used, the oil pressure being obtained from an oil pump driven off the turbine shaft.

The following is a description of an automatic oil pressure governor made by Sir. W. G. Armstrong, Whitworth & Co. A view of this relay governor is shown in Fig. 123.


The governor is driven direct from the turbine shaft by belt or other means, and is of the automatic oil pressure sensitive type.

The oil pressure is obtained from a rotary gear pump, also driven from the turbine shaft, with accurately cut teeth to ensure the highest possible efficiency and noiseless rotation.

The servo-motor piston is connected direct to the actuating lever on the governor shaft, the piston being differential. The pressure oil operates on the servo-motor piston through a

rotating cylindrical distributing valve which is directly connected to the governor head, and moves axially when any speed variation takes place.

In the event of a speed rise, the rotating valve is moved away from the governor head, uncovering a port which opens

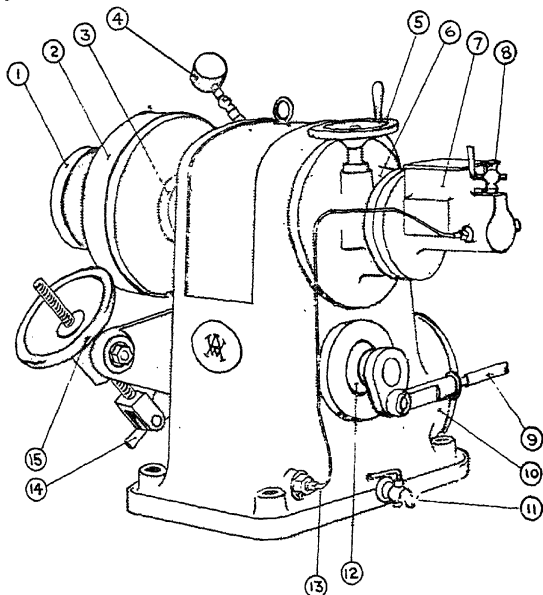


(Armstrong-Whitworth)

FIG. 123.—AUTOMATIC OIL PRESSURE GOVERNOR

- | | |
|------------------------------|----------------------------|
| 1. Governor head | 9. Connecting rod |
| 2. Driving pulley | 10. Servomotor cylinder |
| 3. Gear pump | 11. Drain cock for sump |
| 4. Pressure gauge | 12. Governor shaft bearing |
| 5. Speed adjusting handwheel | 13. Compensating pipe |
| 6. Valve housing | 14. Locking pin |
| 7. Relay chamber | 15. Handgear |
| 8. Air cock | |

the large area side of the servo-motor cylinder to the sump. Constant pressure always being maintained on the small area side, the piston is moved back from the centre of the governor, thereby closing down the turbine.

Should the speed drop, the valve moves towards the governor head, uncovering a port which admits pressure oil into the large

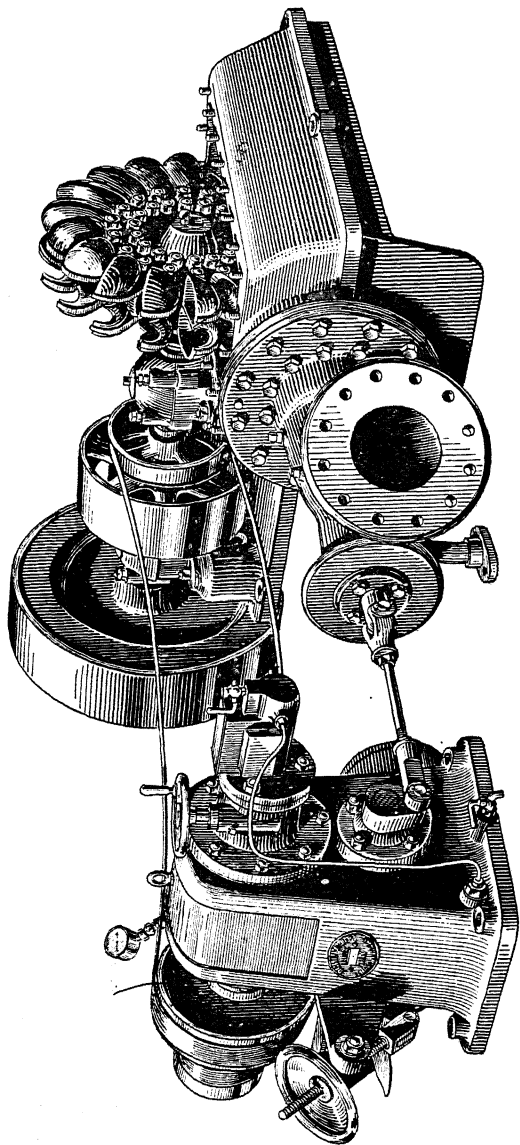

(Armstrong-Whitworth)

FIG. 124.—RELAY GOVERNOR COUPLED TO PELTON WHEEL

area side of the servo-motor piston, moving the piston towards the centre of the governor owing to the greater volume of pressure oil on the back of the piston, thereby opening up the turbine.

The movement of the actuator lever operates a relay plunger pump which is connected by means of a pipe to an oil brake damping cylinder at the end of the valve spindle when the servo-motor piston is moved in the closing direction. The relay pump simultaneously forces oil to the back of the oil brake piston, thus restoring equilibrium, and preventing the governor from over closing. This arrangement makes hunting impossible.

The governor head is of the patent evolute type, where only rolling motion takes place, making friction losses practically negligible.

A synchronizing attachment is provided for varying the speed regulation of the set between full and no load. This mechanism is adjustable by hand. A hand control is provided for adjusting the running speed to ± 4 per cent. An electric remote control from the switchboard can also be installed if required.

Hand operating gear is provided for starting up and in case of emergency.

In Fig. 124 is shown a view of this governor coupled to a Pelton wheel. In this case the governor is operating the needle valve at the nozzle.

105. Inertia of Water Column in Supply Pipe. Another difficulty in water turbine governing is the regulation of the increase of pressure due to the inertia effect of the column of water in the supply pipe. On the governor partly closing the gate there will be a slowing down of the water in the supply pipe; this will cause an increase of pressure at the guide vanes which may tend to speed up the turbine. In order to prevent this, a pressure regulator in the form of a spring relief valve is fitted at the turbine end of the supply pipe.

Another method of overcoming the inertia effect of the water column in the supply pipe is to fit a vertical pipe and tank, known as a "surge tank," on the supply pipe as near to the turbine as possible (Fig. 125). This tank is open to the atmosphere at the top. When the turbine gates are closing, the slowing down of the water column in the supply pipe

will cause a rise of pressure, and water will flow into the surge tank, thus reducing the shock. When the turbine gates are opening, water will flow from the surge tank into the turbine whilst the water column in the supply pipe is accelerating.

For turbines with very large heads the surge tank is closed at the top, the air trapped in being compressed and expanded by the closing and opening of the turbine gates. This is the same in principle as the air vessel on a reciprocating pump.

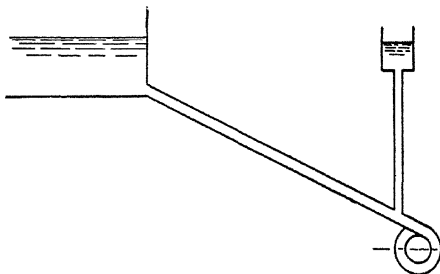


FIG. 125

106. Characteristic Curves for Turbine. There is a large variation in the efficiency of a turbine when the gate and speed are varied; for small gate openings and low speeds the efficiency is very low. To obtain the conditions for the maximum efficiency for a turbine a diagram is plotted showing the efficiencies for all conditions of running; from this diagram the condition for maximum efficiency may be obtained; such a diagram is known as a Characteristic Curve. The points on the diagram are obtained by testing the turbine for various gate openings and at various speeds; the diagram holds for that particular turbine only.

Before plotting the diagram certain characteristics for the turbine are calculated from the results of the tests; these characteristics are known as Unit Power, Unit Speed, and Unit Quantity.

UNIT POWER. The unit power of any particular turbine may be defined as the power developed under a head of 1 ft., or under unit head if any other system of dimensions be used.

Let	$P =$ horse-power developed
then,	$P \propto W H$
but,	$W = 62.4 a V$
and,	$V \propto \sqrt{2gH}$
hence,	$W \propto \sqrt{H}$
Then,	$P \propto H^{\frac{3}{2}}$
Or,	$P = k_1 H^{\frac{3}{2}}$

where k_1 is a coefficient which will vary with the efficiency of the turbine ; that is, with the gate opening and speed.

When $H = 1$ ft.,

$$P = k_1 = \text{unit power}$$

$$\text{Hence, the unit power of a turbine} = k_1 = \frac{P}{H^{\frac{3}{2}}}$$

UNIT SPEED. The unit speed for a particular turbine is the speed when running under a head of 1 ft. For a given turbine,

$$n \propto \sqrt{H}$$

$$\text{or, } n = k_2 \sqrt{H}$$

where k_2 is a coefficient which will vary with the conditions of running.

When $H = 1$ ft., $n = k_2 = \text{unit speed}$

$$\text{Hence, unit speed of a turbine} = k_2 = \frac{n}{\sqrt{H}}$$

UNIT QUANTITY. This is the volume of water passing through the turbine when the head is 1 ft.

$$Q = a V$$

$$\text{or, } Q \propto a \sqrt{H}$$

$$\text{hence, } Q \propto \sqrt{H}$$


$$\text{or, } Q = k_3 \sqrt{H}$$

where k_3 is a coefficient depending on the condition of running

When $H = 1$ ft., $Q = k_3 = \text{unit quantity}$,

$$\text{then, unit quantity for a turbine} = k_3 = \frac{Q}{\sqrt{H}}$$

THE CHARACTERISTIC CURVE. This is a chart showing the efficiencies of a particular turbine under all conditions of running. The turbine is first tested for a particular gate opening ; the speed and head are varied, and the quantity and brake horse-power are measured. From these results values of the efficiency, unit power, and unit speed are calculated for the various speeds and heads at that gate opening. A

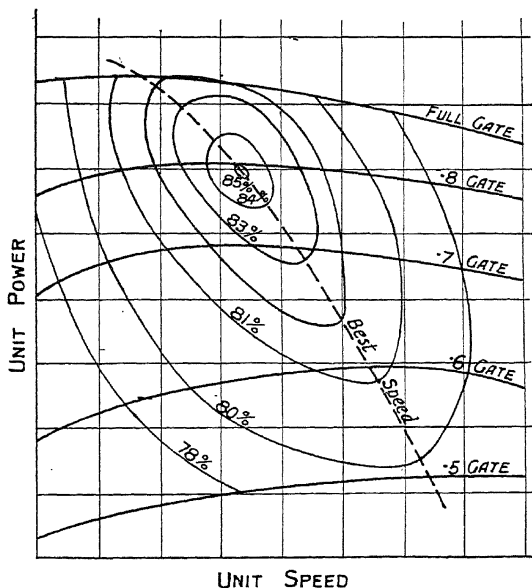

UNIT SPEED

FIG. 125A

curve is then plotted for this gate opening with unit power and unit speed as ordinates ; the efficiency for each point obtained is written on the curve at that point (Fig. 125A). These tests are repeated for various gate openings, and the efficiencies plotted as before. By examining the efficiencies written at each point, lines of equal efficiency can be drawn by interpolation ; these lines correspond to the contour lines on a map.

From this chart it can be seen at a glance what the speed of the turbine should be, at any gate opening, in order to give

the best efficiency for that gate opening. It also shows clearly the maximum efficiency of the turbine for all conditions, and the gate opening and speed which produce this maximum efficiency can be read off the chart; this should be the normal condition of running for the turbine.

107. Principle of Similarity Applied to Turbines. The principle of similarity may be applied to turbines in order to predict the performance of a future design from the tests on a model. A small model is made similar to the actual turbine and, by means of a test, its horse-power is measured under a known head and at a known speed; the quantity of water supplied is also measured. From these results it is possible to calculate the performance of the actual turbine.

Let D = diameter of a turbine.

P = horse-power of turbine.

For all similar turbines all the velocities such as V , v , V_r , V_f etc., will be proportional to \sqrt{H} . This is obvious from the velocity triangles, the blade angles being constant.

Hence, $v \propto \sqrt{H}$

and, $V_f \propto \sqrt{H}$

but, $v = \pi Dn$

hence, $\pi Dn \propto \sqrt{H}$

from which, $D \propto \frac{\sqrt{H}}{n}$ (1)

$$\begin{aligned} \text{Also, } P &= \frac{WH}{550} \\ &= \frac{w(\pi Db)V_f H}{550} \end{aligned}$$

but, $b \propto D$

and, $V_f \propto \sqrt{H}$

hence, $P \propto D^2 H^{\frac{3}{2}}$

or, $P = k_1 D^2 H^{\frac{3}{2}}$ (2)

where k_1 is a constant for the type of turbine considered. By combining Equations (1) and (2) the equation for specific speed may be obtained, as in Art. 103.

Also, $Q = \pi D b V_f$

then, $Q \propto D^2 \sqrt{H}$

or, $Q = k_s D^2 \sqrt{H}$ (3)

where k_2 is a constant for the type considered.

It was shown in Art. 103 that

$$n = k \frac{H^{\frac{5}{4}}}{\sqrt{P}}$$

Hence, by measuring the values of P , H , n and D from the model test the values of k , k_1 , and k_2 may be calculated. These values will also hold for the large turbine; hence, as its diameter is known, and as the head under which it will run is known, its horse-power, speed, and quantity may be calculated. It should be noted that the horse-power used for equation (1) is the water horse-power supplied, whilst that measured in the model test is the brake horse-power; hence, the efficiency of the runner has been assumed to be the same for both model and large turbine. This is not quite true, as the efficiency of the model is slightly less than the large turbine due to the friction of the water being greater in the small passages of the model.

EXAMPLE.

Tests on a model turbine, 1 ft. diameter, give a maximum efficiency of 82 per cent at 900 revs. per min. and at $\frac{3}{4}$ gate opening, under a head of 64 ft. The output was then 38.4 b.h.p. A similar turbine is required to develop 500 b.h.p. at $\frac{3}{4}$ gate under a head of 81 ft. Calculate its diameter and speed of rotation. How would you expect its efficiency to compare with that of the model? (London Univ., 1926.)

Assume efficiency is the same for model and turbine, and use the equation for specific speed given in Art. 103.

Then,
$$n = k \frac{H^5}{\sqrt{P}}$$

From which, $k = \frac{n\sqrt{P}}{H^{\frac{5}{4}}}$

$$= \frac{900\sqrt{38.4}}{64^{\frac{5}{4}}} = 30.75$$

Next apply this equation to the large turbine, the value of k will be the same as for model.

$$\begin{aligned} n &= 30.75 \frac{H^{\frac{5}{4}}}{\sqrt{P}} \\ &= 30.75 \times \frac{81^{\frac{5}{4}}}{\sqrt{500}} \\ &= 334 \text{ revs. per min.} \end{aligned}$$

From Equation (1),

$$D = c \frac{\sqrt{H}}{n}$$

where c is a constant for model and large turbine.

Hence, applying this equation to model,

$$\begin{aligned} c &= \frac{Dn}{\sqrt{H}} \\ &= \frac{1 \times 900}{\sqrt{64}} = 112.5 \end{aligned}$$

Using this value of c and applying the equation to the large turbine,

$$\begin{aligned} D &= \frac{112.5\sqrt{H}}{n} \\ &= \frac{112.5\sqrt{81}}{334} \\ &= 3.04 \text{ ft.} \end{aligned}$$

EXAMPLE 10.

(1) An inward flow reaction turbine has an external diameter of 2 ft. If the breadth of the wheel at inlet is 6 in. and the velocity of flow at inlet is 5 ft. per sec., find the weight of water passing through the turbine per sec.

Ans.—980 lb.

(2) If the turbine of Question 1 has a speed of 192 revs. per min. and if the guide blade makes an angle of 10° to the wheel tangent, draw the velocity triangle at inlet and find the runner blade angle, the velocity of whirl, the absolute velocity of the water leaving the guide vane, and the relative velocity of the water entering the runner blade.

Ans.— $\theta = 31^\circ$; $V_w = 28.4$ ft. per sec.; $V = 28.8$ ft. per sec.;

$V_r = 9.8$ ft. per sec.

(3) If the turbine of Question 1 has an inner diameter of 1 ft., find the breadth of the wheel at outlet in order to keep the velocity of flow 5 ft. per sec. Find also the runner blade angle at outlet if the discharge is radial and draw the velocity triangle at outlet.

Ans.—12 in. ; 26°.

(4) Find the work done per lb. of water for the turbine in Question 1 ; find also the head supplied, the horse-power produced, and the hydraulic efficiency.

Ans.—17·7 ft. lb. ; $H = 18\cdot12$ ft. ; h.p. = 31·6 ; eff. = 98 per cent.

(5) The lead-on angle of the guide vanes in an axial flow impulse turbine is 20° ; the wheel vane angle at entrance is 60° ; the head 400 ft. If the velocity at discharge is axial, and if the coefficient of velocity for the guide vanes is ·98, determine the work done per second when passing 10 cu. ft. per sec. and running under maximum efficiency conditions. [$\sin 20^\circ = \cdot342$.] (A.M.I. Mech. E., 1922.)

Ans.—333,000 ft. lb.

(6) In an outward-flow turbine supplied with 180 cu. ft. per sec. and making 200 rev. per min., the internal and external diameters of the wheel are 6 ft. and 7 ft. 6 in. respectively and the effective width of the wheel-face at inlet and outlet is 9 in. The head on the wheel is 115 ft. and the discharge is free and radial. Neglecting the thickness of the vanes and friction losses, determine the angles of the vanes at entrance and exit, and sketch a vane showing these angles. (A.M.I. Civil E., 1921.) (Assume turbine to be a reaction.)

Ans.—109·8° ; 7·4°.

(7) The peripheral velocity of the wheel of an inward flow turbine is 70 ft. per sec. The velocity of whirl of the inflowing water is 55 ft. per sec., and the radial velocity of flow 7 ft. per sec. If the flow is 24 cusecs and the hydraulic efficiency 80 per cent, find the head on the wheel, the horse-power of the turbine, and, by drawing to scale, the triangle of velocities, the inlet angle of the vanes. The discharge is radial. (A.M.I. Civil E., 1922.)

Ans.—149·5 ft. ; 325 h.p. ; 155°.

(8) Describe the working of, and a method of governing, an axial-flow Girard turbine.

If for such a turbine the angle of the guide blades is 30°, and the angle of the rotor vanes is 25° at outlet, find the maximum hydraulic efficiency, and the best speed of the turbine.

The available head is 100 ft., and the mean diameter of the rotor 6 ft. (London Univ., 1916.) [Assume axial discharge for max. eff.]

Ans.—93·7 per cent ; 137 revs per min.

(9) An inward flow turbine, having an overall efficiency of 75 per cent., is required to give 175 h.p. The head H is 20 ft. ; velocity of periphery of the wheel is $\cdot95\sqrt{2gH}$; and the radial velocity of flow is $\cdot35\sqrt{2gH}$. The wheel is to make 230 revs. per min., and the hydraulic losses in the turbine are 20 per cent of the available energy. Determine (a) the angle of the guide blade at inlet ; (b) the wheel vane angle at inlet ; (c) the diameter of the wheel ; (d) the width of the wheel at inlet. [Assume turbine is reaction and radial discharge.] (London Univ., 1916.)

Ans.—(a) 39·8° ; (b) $146\frac{1}{2}^\circ$; (c) 2·83 ft. ; (d) 11·02 in.

(10) A Pelton wheel has a mean bucket speed of 40 ft. per sec., and is supplied with water at the rate of 150 gallons per sec. under a head of 100 ft. If the buckets deflect the jet through an angle of 160° , find the horse-power and efficiency of the wheel.

Ans.—264.2 h.p.; $e = 97$ per cent.

(11) Obtain an expression for the theoretical efficiency of a Pelton wheel when the angle of the bucket at exit makes an angle of θ with the direction of the jet. Show by a diagram how the efficiency of the wheel will vary as the relation of the velocity of the jet to the velocity of the bucket is varied.

Describe, with carefully drawn sketches, at least one method of governing a Pelton wheel. (London Univ., 1917.)

(12) Briefly describe an "Inward Flow Turbine." Show that in a turbine with radial vanes at the receiving circumference the theoretical hydraulic efficiency is $\frac{2}{2 + \tan^2 \alpha}$ where α is the angle made by the guide blade with a tangent to the point where it cuts the receiving circumference, the velocity of radial flow being constant. (London Univ., 1915.)

(Assume turbine is reaction with radial discharge.)

(13) In an outward flow reaction turbine the rim speed at inlet is 40 ft. per sec., and the ratio of the radii is .8. The turbine is placed 3 ft. below the water surface in the tail race, and the wheel vane angles are 90° and 20° at inlet and outlet respectively. The radial velocity of flow at inlet is 14 ft. per sec. Neglecting frictional losses, and taking velocity of outflow as radial, find the guide vane angle, pressure head at inlet to the wheel, speed of flow from guides, the total head, and hydraulic efficiency. (London Univ., 1915.)

Ans.— 19.3° ; 29.8 ft. of water (gauge); 42.3 ft. per sec.; 54.5 ft.; $e = 91.2$.

(14) An inward flow turbine, having an overall efficiency of 75 per cent, is required to give 180 h.p. The head H is 30 ft. The velocity of the periphery of the wheel is $6\sqrt{H}$, and the radial velocity of flow is $2\sqrt{H}$. The wheel is to make 120 revs. per min. The hydraulic losses in the turbine are 20 per cent of the available energy. Determine: (a) the guide blade angle at inlet; (b) the wheel vane angle at inlet; (c) the diameter of the wheel; (d) the width of the wheel at inlet. [Assume turbine is reaction and radial discharge.] (London Univ., 1920.)

Ans.—(a) 25.1° ; (b) 130.5° ; (c) 5.23 ft.; (d) 4.8 in.

(15) An inward-flow pressure turbine has a runner whose vanes are radial at inlet and inclined backwards at 30° to the tangent at discharge. The diameter at entry is twice that at discharge, and the width at entry is one-half that at discharge. The guide vanes are inclined at 15° to the tangent. The velocity of the water leaving the guide is 80 ft. per sec. Determine the correct velocity for the runner, and the absolute velocity of the water at the point of discharge. (A.M. Inst. C.E., 1925.)

Ans.— $v = 77.3$ ft. per sec.; $V_1 = 20.9$ ft. per sec.

(16) The following data were obtained from a test on a Pelton wheel—

Area of jet	= 12.0 sq. in.
Discharge	= 6.35 cu. ft. per sec.
Head at nozzle	= 100.0 ft.
Brake horse-power	= 56.0
H.P. absorbed in friction and windage	= 3.0

Determine the energy lost in the nozzle, and also the energy absorbed due to losses in the wheel at discharge. (A.M.I. Mech. E., 1926.)

Ans.—7.05 h.p. and 5.8 h.p.

(17) Given the formula $N_s = N\sqrt{P} \div H^{\frac{5}{4}}$ for the specific speed of a water-turbine, in which N is revs. per min., P is the brake horse-power, and H is the available head in feet, prove that the specific speed of a single jet Pelton wheel is $\frac{55d}{D}$, in which d is the diameter of the jet in feet, and D is the diameter of the mean bucket circle in feet. Assume that the coefficient of velocity of the jet is unity, and that when the maximum efficiency is 85 per cent the mean bucket speed is $.46\sqrt{2gH}$. (London Univ., 1924.)

(18) Define the terms "specific speed," "unit speed," and "unit power" as applied to a hydraulic turbine. Describe the method of preparation of, and the use of, the characteristic diagram for a turbine, the co-ordinates being "unit speed" and "unit power." (London Univ., 1925.)

(19) Show that in a given turbine the peripheral speed of the runner for maximum efficiency is proportional to \sqrt{H} where H is the available head, and that under these conditions the quantity of water consumed is proportional to \sqrt{H} , and the power developed to $H^{\frac{3}{2}}$.

Hence, show how the performance of a turbine may be predicted from that of a geometrically similar model. (London Univ., 1924.)

CHAPTER XI

CENTRIFUGAL PUMPS

108. Centrifugal Pumps. The action of a centrifugal pump is that of a reversed turbine, except that special arrangements must be made in order to increase the efficiency. All centrifugal pumps are outward flow, as the radial velocity of the water in the pump is then increased by the centrifugal head impressed on it by the rotating vanes. The pump must be full when starting; for this reason, it should not be allowed to drain. The pump is driven by power from an external source, by which means the vanes are rotated. This gives a centrifugal head to the water in the pump, and the water will leave the vanes at the outer circumference with a high velocity and pressure. A partial vacuum will form in the centre, into which the water from the suction pipe flows. The high pressure of the leaving water is utilized in overcoming the delivery head of the pump. In earlier types of centrifugal pumps the high velocity of the leaving water was wasted in eddies in the circular chamber which surrounded the vanes; but this is now transformed into pressure head by causing the leaving water to flow through a passage of gradually increasing area. The kinetic energy of the leaving water is thus converted into pressure energy, which is utilized in increasing the delivery head of the pump. The efficiency is thus considerably increased.

The following are the methods adopted to convert the kinetic energy of the leaving water into pressure energy.

(a) **VOLUTE CHAMBER.** The vane wheel or impeller is surrounded by a spiral casing known as a volute chamber (Fig. 126). The leaving water flows inside this chamber circumferentially, the velocity decreasing with the increasing area of flow. When the water reaches the delivery pipe, the velocity will be small and the pressure will have correspondingly increased. It has been found from tests that this type of chamber only slightly increases the efficiency of the pump; a considerable loss takes place in eddies due to the continually increasing quantity of water flowing through the chamber.

(b) **VORTEX OR WHIRLPOOL CHAMBER.** Professor James Thomson improved on the volute chamber by combining a

circular chamber with a spiral chamber (Fig. 127); such a casing is known as a vortex or whirlpool chamber. An increased efficiency is obtained by means of this type of casing.

(c) **GUIDE BLADES.** Another method of converting the velocity head of the leaving water into pressure head is by causing the water to flow through passages of increasing area formed by guide vanes (Fig. 128). A pump fitted with such vanes is known as a turbine pump, and is similar in principle to a reversed inward flow turbine. The guide blades are placed at such an angle that the water enters without shock and is surrounded by a volute chamber, by which the water reaches the delivery pipe. The ring of guide blades is called a diffuser, and is found to be very efficient.

There is much looseness in the use of the above terms. Some authorities apply the terms vortex chamber, whirlpool chamber, and diffuser to all types of casings surrounding the impeller.

109. Work Done and Efficiency of Centrifugal Pump. The blade angles and work done by a centrifugal pump may be found from the velocity

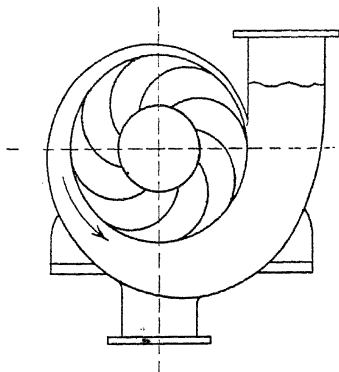


FIG. 126

triangles in the same way as for a turbine, except that the inlet triangle now becomes the outlet and *vice versa*. It is usual to assume the water enters the wheel radially.

Using the same notation as for turbines (Art. 97),

$$\left. \begin{array}{l} \text{Centrifugal head im-} \\ \text{pressed on water} \end{array} \right\} = \frac{v_1^2}{2g} - \frac{v^2}{2g}$$

Let H = total theoretical lift of pump, or design head

Then,

$$\text{theoretical gross lift} = H + \frac{v_d^2}{2g}$$

where v_d = velocity of discharge from delivery pipe.

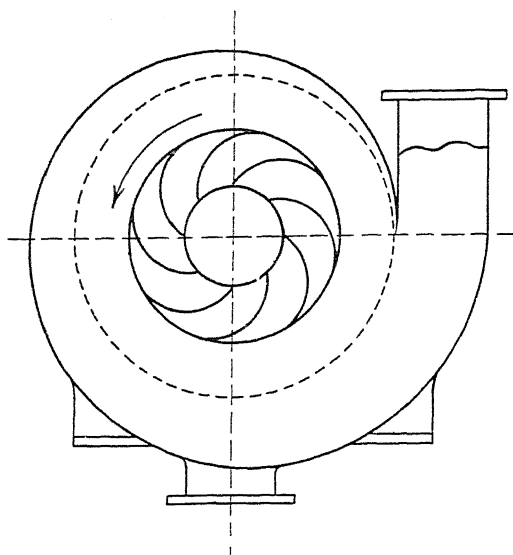


FIG. 127

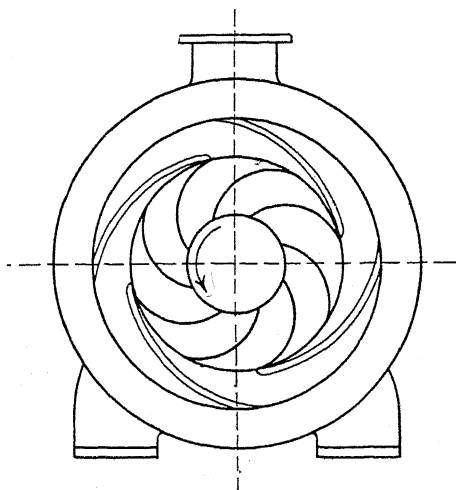


FIG. 128

The term $\frac{v_d^2}{2g}$ is small and may usually be neglected.

The velocity triangles for inlet and outlet are shown in Fig. 129.

$$\text{and, } \frac{v}{v_1} = \frac{r}{r_1}$$

$$\left. \begin{array}{l} \text{work done by impeller} \\ \text{per pound of water} \end{array} \right\} = \frac{V_{w_1} v_1}{g}$$

$$= H + \frac{v_d^2}{2g}$$

$$\text{Therefore, } \frac{V_{w_1} v_1}{g} = H + \frac{v_d^2}{2g}$$

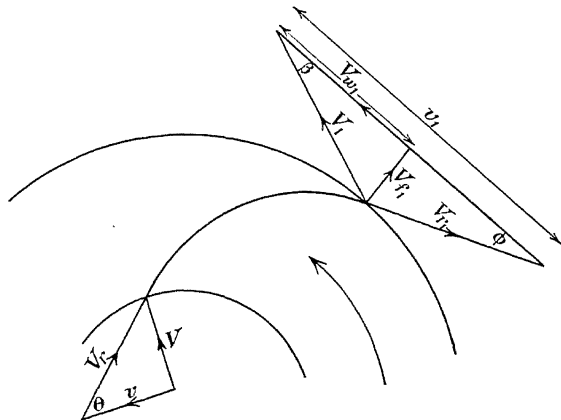


FIG. 129

Let h_f = head lost in friction in delivery and suction pipes

h = actual height water is lifted by pump

W = weight of water pumped per sec.

$$\text{Then, gross lift} = h + h_f + \frac{v_d^2}{2g} =$$

Actual efficiency

$$= \frac{\text{actual lift}}{\text{energy supplied to pump shaft per lb. of water}}$$

$$= \frac{Wh}{\text{horse-power} \times 550}$$

$$\begin{aligned} \text{The manometric efficiency} &= \frac{\text{gross lift}}{\text{theoretical gross lift}} \\ &= \frac{h + h_f + \frac{v_d^2}{2g}}{H + \frac{v_d^2}{2g}} = \frac{h + h_f + \frac{v_d^2}{2g}}{\frac{V_{w_1} v_1}{g}} \end{aligned}$$

$$\begin{aligned} \text{Hydraulic efficiency} &= \frac{\text{gross lift}}{\text{energy supplied to impeller per lb. of water}} \end{aligned}$$

The energy supplied to impeller is less than that supplied to shaft by mechanical losses in bearings, etc.

110. Minimum Starting Speed of Centrifugal Pump. In starting a centrifugal pump, there will be no flow through the wheel until the pressure difference in the impeller is large enough to overcome the total lift. If the impeller is rotating and there is no flow, the pressure head caused by the centrifugal force on the rotating water will be $\frac{v_1^2}{2g} - \frac{v^2}{2g}$

Flow will not commence until this amount is greater than H , as $v_d = 0$ when flow commences.

$$\text{As} \quad H = \frac{V_{w_1} v_1}{g}$$

the least theoretical speed for flow to commence will be when

$$\frac{v_1^2}{2g} - \frac{v^2}{2g} = \frac{V_{w_1} v_1}{g}$$

Actually, flow will commence when

$$\frac{v_1^2}{2g} - \frac{v^2}{2g} = e \frac{V_{w_1} v_1}{g}$$

where e = manometric efficiency.

111. Head Lost in Centrifugal Pump due to Reduced or Increased Flow. A centrifugal pump will produce its maximum efficiency only when running and discharging at the speeds for which it was originally designed. If the normal discharge is increased or reduced, there will be a loss of head at entry due to shock.

Let triangle abd (Fig. 130) be the velocity triangle for the pump when running normally. The blades at inlet will be parallel to ab . If the radial flow through the pump is now reduced from bd to cd , whilst the speed of rotation remains the same, the triangle of velocity will be represented by acd , ac being the relative velocity. But the angle of the blade at inlet will be the same as before; the relative velocity, therefore, will no longer be parallel to the blade and shock will occur.

As the velocity of flow is fixed, and as the water must pass along the vane, it follows that the velocity triangle will be

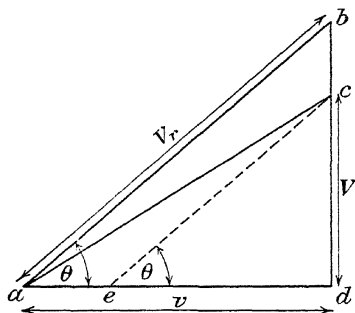


FIG. 130

triangle ecd , ec being parallel to ab . Therefore, a tangential change of velocity ae will suddenly take place, the shock causing the loss of head.

It was shown in Art. 40 that the loss of head due to a sudden change of velocity is equal to

$$\frac{(\text{change of velocity})^2}{2g}$$

$$\begin{aligned} \text{Therefore,} \quad \left. \begin{array}{l} \text{loss of head at entrance} \end{array} \right\} &= \frac{(ae)^2}{2g} \\ &= \frac{\left(v - \frac{V}{\tan \theta}\right)^2}{2g} \end{aligned}$$

where V is the velocity of flow cd through the pump.

The same equation applies if the flow is greater than the normal flow.

EXAMPLE.

Show how the triangle of velocities at inlet to the impeller of a centrifugal pump is affected by reducing the flow below the normal; and obtain an expression for the loss of head at inlet for any reduced value of the velocity of flow. State the assumptions made and the factors which affect the accuracy of the expression obtained.

A centrifugal pump has an impeller 20 in. outer diameter, and, when running at 520 revs. per min., discharges 1,700 gallons of water per minute against a head of 28 ft. At that discharge, the water enters the impeller without shock. The inner diameter is 10 in., the vanes are set back at outlet at an angle of 45° , and the area of flow, which is constant from inlet to outlet of the impeller, is $\cdot 65$ sq. ft.

Determine (a) the manometric efficiency of the pump; (b) the vane angle at inlet; (c) the loss of head at inlet to the impeller when the discharge is reduced by 50 per cent., the speed of rotation being unchanged. (London Univ., 1921.)

The velocity triangles are the same as shown in Fig. 129.

$$v_1 = \pi d_1 \frac{n}{60} = \pi \times \frac{20}{12} \times \frac{520}{60} = 45.4 \text{ ft. per sec.}$$

$$v = v_1 \times \frac{10}{20} = 22.7 \text{ ft. per sec.}$$

$$V = V_{f_1} = \frac{\text{Quantity per sec.}}{\text{area of flow}} = \frac{1700}{60 \times 6.24 \times .65} \\ = 7 \text{ ft. per sec.}$$

$$V_{w_1} = v_1 - \frac{V_{f_1}}{\tan 45} = 45.4 - 7 = 38.4 \text{ ft. per sec.}$$

$$\left. \begin{array}{l} \text{(a) Work done per} \\ \text{pound of water} \end{array} \right\} = \frac{V_{w_1} v_1}{g} \\ = \frac{38.4 \times 45.4}{32.2} = 54.2 \text{ ft. lb.}$$

$$\text{Manometric efficiency} = \frac{\text{gross lift}}{\text{theoretical work done}} \\ = \frac{28}{54.2} = 51.7 \text{ per cent.}$$

(b) From inlet velocity triangle,

$$\tan \theta = \frac{V}{v} = \frac{7}{22.7} = .308$$

Then,

$$\theta = 17.1^\circ$$

(c) New velocity of flow at inlet $= \frac{7}{5} = 3.5$ ft. per sec.

$$\begin{aligned} \text{Head lost at inlet} &= \frac{\left(v - \frac{V}{\tan \theta}\right)^2}{2g} \\ &= \frac{\left(22.7 - \frac{3.5}{\tan 17.1}\right)^2}{2g} \\ &= 2 \text{ ft.} \end{aligned}$$

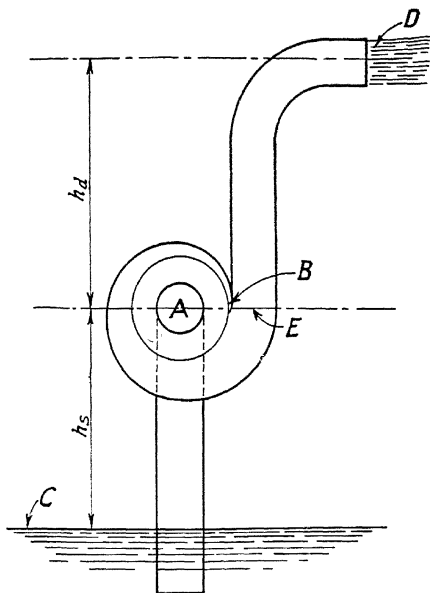


FIG. 131

112. Water Pressure in Centrifugal Pumps. The pressure of the water at any section of the stream in a pump may be found by applying Bernoulli's equation to various sections of the pump stream. Consider the pump and piping shown in Fig. 131. Let *A* be a point at the inlet edge of the impeller on the horizontal centre line of the pump, let *B* be a point at

the outlet edge of impeller on the same centre line, let C be a point on the water surface in the sump, and D be a point at the outlet of the discharge pipe. If all losses are neglected, the total energy of the water will be the same at all these points provided that the work done by the impeller is added to these points which are in the stream on the exit side of the impeller.

Let h_s = height of pump above sump in feet

h_d = height of outlet end of discharge pipe above pump in feet

p_A = pressure in lb. per sq. ft. absolute at A

p_B = pressure in lb. per sq. ft. absolute at B

Apply Bernoulli's equation to points A and C , let water level in sump be datum and neglect all losses.

Total energy at A = total energy at C

$$\text{Hence, } h_s + \frac{V^2}{2g} + \frac{p_A}{w} = 34$$

From this equation p_A may be found.

If the frictional loss in the suction pipe is taken into account the equation becomes—

$$h_s + \frac{V^2}{2g} + \frac{p_A}{w} + h_f = 34$$

where h_f is the head lost in friction in the suction pipe.

Next apply Bernoulli's equation to points A and B , using centre line of pump as datum.

Total energy at A = total energy at B - work done by impeller

$$\text{Hence, } \frac{V^2}{2g} + \frac{p_A}{w} = \frac{V_1^2}{2g} + \frac{p_B}{w} - \frac{V_{w_1} v_1}{g}$$

From this equation p_B may be found.

Next apply Bernoulli's equation to points B and D , using the centre line of pump as datum.

Total energy at B = total energy at D + losses.

$$\text{Hence, } \frac{V_1^2}{2g} + \frac{p_B}{w} = 34 + h_d + \frac{v_d^2}{2g} + \text{loss in diffuser} + h_f$$

where h_f is the head lost in friction in delivery pipe.

From this equation the loss in the diffuser may be found.

$$\left. \begin{array}{l} \text{Theoretical head saved by} \\ \text{fitting diffuser to pump} \end{array} \right\} = \frac{V_1^2}{2g} - \frac{v_d^2}{2g}$$

$$\text{Efficiency of diffuser} = \frac{\text{Theoretical head saved} - \text{loss in diffuser}}{\text{Theoretical head saved}}$$

EXAMPLE.

A centrifugal pump has a total lift of 50 ft. from well to delivery tank. The wheel is 5 ft. above the well water surface. The velocity of delivery from the uptake is 5 ft. per sec.; the radial velocity of flow through the wheel is 10 ft. per sec.; the tangent to the vane at exit from the wheel makes an angle of 120° with the direction of motion; the water enters the wheel radially. Find (1) the velocity of the wheel at exit; (2) the pressure head at exit from the wheel; (3) the velocity head at exit from the wheel; (4) the desirable direction for the fixed guide vanes. Neglect friction and other losses. (London Univ., 1920.)

$$\begin{aligned} \text{Total head} &= 50 + \frac{v_d^2}{2g} \\ &= 50 + \frac{5^2}{2g} = 50.39 \text{ ft.} \end{aligned}$$

Referring to velocity triangles in Fig. 129,

$$\phi = 180 - 120 = 60^\circ$$

$$V_{w_1} = v_1 - \frac{10}{\tan \phi} = v_1 - 5.77$$

$$(1) \quad \frac{V_{w_1} v_1}{g} = H + \frac{v_d^2}{2g}$$

$$\text{Or,} \quad \frac{v_1(v_1 - 5.77)}{g} = 50.39$$

From which, $v_1 = 43.23$ ft. per sec.

$$\begin{aligned} (2) \quad V_{w_1} &= v_1 - \frac{10}{\tan 60} \\ &= 43.23 - 5.77 \\ &= 37.46 \text{ ft. per sec.} \end{aligned}$$

$$\begin{aligned} V_1 &= \sqrt{V_{w_1}^2 + V_{f_1}^2} \\ &= \sqrt{37.46^2 + 10^2} \\ &= 38.8 \text{ ft. per sec.} \end{aligned}$$

Apply Bernoulli's equation to the pump at outlet and to the outlet end of delivery pipe, and taking the level of the pump as datum,

$$H_p + \frac{V_1^2}{2g} = 50 + \frac{v_d^2}{2g} - 5$$

where H_p = pressure head at vane outlet.

$$\begin{aligned} \text{Therefore,} \quad H_p &= 50 + .39 - 5 - \frac{(38.8)^2}{2g} \\ &= 50 + .39 - 5 - 23.3 \\ &= 22.1 \text{ ft. of water.} \end{aligned}$$

$$(3) \quad \frac{V_1^2}{2g} = \frac{(38.8)^2}{2g} = 23.3 \text{ ft. of water}$$

(4) The fixed guide vanes will be parallel to the absolute velocity of water at outlet, i.e. will be parallel to V_1 . From velocity triangle at outlet,

$$\tan \alpha = \frac{V_{f1}}{V_{w1}}$$

where β = inclination of guide vanes.

$$\text{Then,} \quad \tan \alpha = \frac{10}{37.46} = .267$$

$$\text{From which,} \quad \alpha = 15^\circ.$$

113. The Specific Speed of a Centrifugal Pump. The specific speed of a centrifugal pump is the speed at which the pump would deliver 1 gallon of water per minute under a head of 1 ft. It may be found by applying the principle of similarity to centrifugal pumps; the method is the same as that used for finding the specific speed of water turbines in Art. 103. The specific speed is useful as an index for denoting the type of pump; the value varies between 500 and 8,000 for a single impeller.

In working out the equation for the specific speed the assumption is made that all pumps are similar, then all linear dimensions will be in proportion to the diameter of the impeller. Also, the velocity diagrams for all pumps are assumed to be

similar, and all velocities are proportional to the square root of the total head.

Using the same notation as for turbines (Art. 97),

let d = external diameter of impeller

n = speed in revs. per min.

n_s = specific speed in revs. per min.

h = total head or lift in feet

Q = discharge in galls. per min.

Then, $b \propto d$

and as $v = \omega \frac{d}{2}$

and $\omega \propto n$

then, $v \propto nd$

Or $d \propto \frac{v}{n}$

But $v \propto \sqrt{h}$

Hence, $d \propto \frac{\sqrt{h}}{n}$ (1)

Now, $Q \propto \text{area of flow} \times \text{vel. of flow}$

That is, $Q \propto \pi d b \times V_f$,

But $V_f \propto \sqrt{h}$

Hence, $Q \propto d^2 \sqrt{h}$

Or, substituting for d from Eq. (1),

$$Q \propto \frac{h}{n^2} \times \sqrt{h}$$

Or, $Q \propto \frac{h^{\frac{3}{2}}}{n^2}$

Hence, $n \propto \frac{h^{\frac{3}{4}}}{\sqrt{Q}}$

This may be written, $n = k \frac{h^{\frac{3}{4}}}{\sqrt{Q}}$

where k is a constant.

When h equals 1 ft. and Q is 1 gal. per min. it will be noticed that $n = k$, and also $n = n_s$ from definition of specific speed.

$$\text{Hence, } k = n_s = \frac{n \sqrt{Q}}{h^{\frac{3}{4}}}$$

As an example of the use of specific speed, suppose a pump is required to raise 30,000 gals. per min. through a height of 20 ft. at a pump speed of 2,000 revs. per min.

$$\begin{aligned} \text{Then, } n_s &= \frac{2000 \sqrt{30,000}}{20^{\frac{3}{4}}} \\ &= 36,600 \end{aligned}$$

As the value of n_s for a single impeller is not more than 8,000, it follows that a multi-stage pump consisting of several impellers in series must be used.

$$\begin{aligned} \text{Least No. of impellers} &= \frac{36,600}{8000} \\ &= 5 \end{aligned}$$

114. Principle of Similarity Applied to Centrifugal Pumps. This principle may be applied to centrifugal pumps in order to predict the performance of a future design from the results of tests on a model of the same proportion. A model is constructed and tested under known conditions; the horse-power required to drive it, the speed, the head, and the discharge being measured. From these results the horse-power, speed, and discharge of the large pump under a known head can be calculated.

In Art. 113 it was proved that

$$d \propto \frac{\sqrt{h}}{n} \quad . \quad . \quad . \quad (1)$$

$$Q \propto d^2 \sqrt{h} \quad . \quad . \quad . \quad (2)$$

$$n \propto \frac{h^{\frac{1}{2}}}{\sqrt{Q}} \quad . \quad . \quad . \quad (3)$$

$$\text{Also, horse-power} = P = \frac{62.4 Qh}{550}$$

$$\text{or, } P \propto Qh \quad . \quad . \quad . \quad (4)$$

Substituting for Q from Equation (3)

$$P \propto \frac{h^{\frac{3}{2}}}{n^2} \quad . \quad . \quad . \quad . \quad (5)$$

From these five equations the performance of the large pump may be calculated from the results of the model test.

EXAMPLE.

It is required to predict the performance of a large centrifugal pump from that of a scale model one-fourth the diameter. The model absorbs 20 h.p. when pumping under the test head of 20 ft. at its best speed of 400 revs. per min. The large pump is required to pump against 60 ft. head. What will be its working speed, the horse-power required to drive it, and what will be the ratio of the quantities discharged by the larger pump and the model? (London Univ., 1923.)

From Equation (1), $\frac{nd}{\sqrt{h}}$ is a constant for both large pump and model; hence,

$$\frac{nd}{\sqrt{h}} \text{ for model} = \frac{nd}{\sqrt{h}} \text{ for large pump}$$

$$\text{or,} \quad \frac{400 \times d}{\sqrt{20}} = \frac{n \times 4d}{\sqrt{60}}$$

$$\text{From which,} \quad n = 173 \text{ revs. per min.}$$

From Equation (5), $\frac{Pn^2}{h^{\frac{3}{2}}}$ is a constant

$$\text{hence,} \quad \frac{Pn^2}{h^{\frac{3}{2}}} \text{ for model} = \frac{Pn^2}{h^{\frac{3}{2}}} \text{ for large pump}$$


$$\text{Or,} \quad \frac{20 \times 400^2}{20^{\frac{3}{2}}} = \frac{P \times 173^2}{60^{\frac{3}{2}}}$$

$$\text{From which,} \quad P = 1670$$

From Equation (2),

$$\begin{aligned} \frac{Q \text{ for large pump}}{Q \text{ for model}} &= \frac{d^3 \sqrt{h} \text{ for large pump}}{d^3 \sqrt{h} \text{ for model}} \\ &= \frac{16d^3 \times \sqrt{60}}{d^3 \times \sqrt{20}} \\ &= 27.7 \end{aligned}$$

115. **Characteristic Curves.** From the results of tests on a centrifugal pump when running at its design speed, curves may be plotted showing the relation between efficiency, brake horse-power, head, and discharge. These are known as characteristic curves, and are plotted for one speed only.

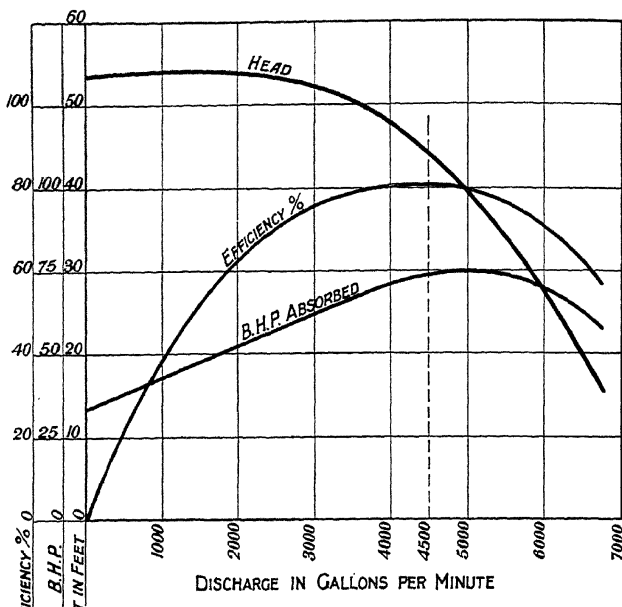

(Worthington-Simpson, Ltd.)

FIG. 132.—PERFORMANCE OF SINGLE IMPELLER LOW-LIFT PUMP


Output, 4,500 gallons per minute; head, 44½ ft.; speed, 875 r.p.m.

From these curves it is possible to estimate the performance of the pump under any condition of working at the speed for which it was designed. Characteristic curves of a single impeller low lift pump are shown in Fig. 132; in Fig. 133 are shown the characteristic curves of a multi-stage high lift pump. Both these sets of curves were taken from Worthington pumps,* and were supplied by the makers. The dotted vertical line on each diagram is drawn through the point of maximum

* By courtesy of Messrs. Worthington-Simpson, Ltd.

efficiency; from the points of intersection of this line with the other curves, the best conditions of running may be read off.

116. The Least Diameter of Impeller. It is usual to make the outside diameter of an impeller to be twice the inner diameter. On this assumption, it is possible to obtain an expression for the minimum diameter of an impeller which will enable it to start pumping when running at its normal

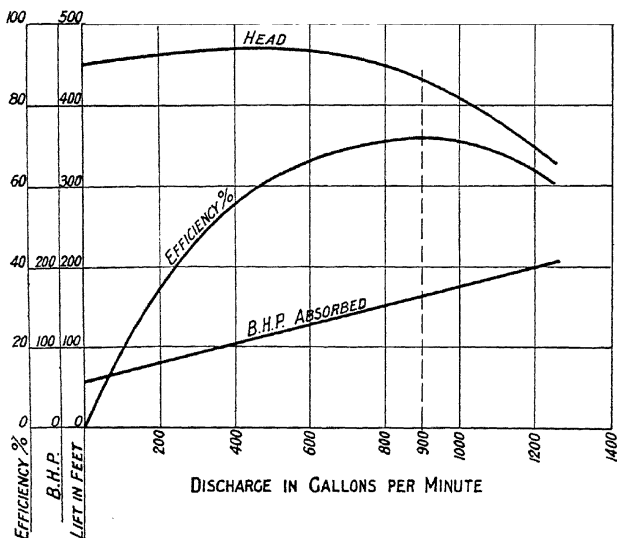

(Worthington-Simpson, Ltd.)

FIG. 133.—PERFORMANCE OF MULTI-STAGE HIGH-LIFT PUMP
Output, 900 gallons per minute, against a head of 430 ft.; speed, 1,450 r.p.m.

speed. The solution is based on the result of Art. 110 which showed that, for the pump to start pumping, the centrifugal head must equal the actual lift.

From the equation of Art. 110,

$$\text{Actual lift} = h = \frac{v_1^2}{2g} - \frac{v^2}{2g}$$

As $v = \omega r$ and $v_1 = \omega r_1$,

$$h = \frac{\omega^2}{2g} (r_1^2 - r^2)$$

Let $d_1 =$ outer diameter of impeller
 $d =$ inner diameter of impeller

Then, $h = \frac{\omega^2}{8g} (d_1^2 - d^2)$

But $d_1 = 2d$

Hence $h = \frac{3\omega^2 d_1^2}{32g}$

From which, $d_1 = \frac{18.54}{\omega} \sqrt{h}$ ft.

But, $\omega = \frac{2\pi n}{60}$ where $n =$ no. of revs.
per min.

Hence, $d_1 = \frac{18.54 \times 60}{2\pi n} \sqrt{h}$
 $= \frac{177\sqrt{h}}{n}$ ft.
 $= \frac{2120\sqrt{h}}{n}$ in.

Assuming a manometric efficiency of .75, the actual lift h will equal .75 of the theoretical lift H .

Then, $d_1 = \frac{1840 \sqrt{H}}{n}$ in.

This equation is used in practice for the design of impellers ; the outside diameter should be at least this amount, otherwise the impeller will be unable to start pumping at its normal speed.

117. The Design of a Turbine Pump. The following is a rough outline of the design of the piping, impeller, and diffuser of a turbine pump, and is based on the matter already dealt with in this chapter. It is assumed that the required discharge, actual lift and speed are given. The actual lift should not be more than 140 ft. for one impeller, if more than this amount a multi-stage pump should be used consisting of two

or more identical impellers in series. The speed should be between 1,000 and 2,000 revs. per min.

Let Q = required discharge in gals. per min.

h = actual lift in feet per impeller, neglecting pipe losses.

The remaining notation will be the same as given in Art. 97.

First find the specific speed from the equation of Art. 113; if this does not lie below 8,000, more impellers must be used.

THE SUCTION PIPE. Let v_s = velocity in suction pipe in ft. per sec. In practice this velocity varies between 5 and 15 ft. per sec., assume an average value of 10 ft. per sec. for v_s .

Then, area of suction pipe = $\frac{Q}{6.24 \times 60 \times v_s}$ sq. ft.

From this the diameter may be obtained. Use the nearest whole number to this from a list of British Standard Pipes.

THE DELIVERY PIPE. Let v_d = velocity in delivery pipe in ft. per sec. In practice this varies between the same limits as the suction pipe; hence, assume an average value of about 10 ft. per sec.

Then, area of delivery pipe = $\frac{Q}{6.24 \times 60 \times v_d}$ sq. ft.

Hence, find the nearest standard pipe to suit.

THE IMPELLER. Assume the outside diameter to be twice inside diameter. Calculate the outside diameter d_1 from the equation given in Art. 116.

Assuming a manometric efficiency of .75, the theoretical lift

$$H = \frac{h}{.75}$$

Then,
$$d_1 = \frac{1840 \sqrt{H}}{n} \text{ in.}$$

and
$$d = \frac{d_1}{2} \text{ in.}$$

Hence, v and v_1 may now be calculated, as $v = \omega \times \text{radius}$.

In practice, the blade angles θ and ϕ vary between 12° and 30° . Choose values for θ and ϕ between these limits, these may require altering later if the velocities obtained from them do not suit.

As θ and v are now known, the inlet triangle may be drawn

on the assumption that the water enters radially (Art. 109). Also, from the equation of Art. 109,

$$H = \frac{V_{w_1} v_1}{g}$$

hence V_{w_1} is obtained.*

As ϕ , v_1 and V_{w_1} are now known, the outlet triangle can be drawn (Art. 109). All velocities in the impeller can be obtained from the inlet and outlet triangles.

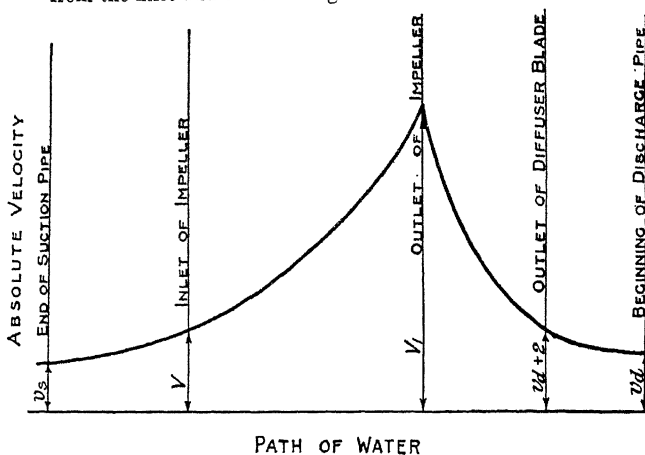


FIG. 134

To find the width of the impeller at inlet use the equation—

$$\frac{Q}{6.24 \times 60} = \pi db V_f$$

To find the width at outlet use the equation—

$$\frac{Q}{6.24 \times 60} = \pi d_1 b_1 V_{f_1}$$

If these widths b and b_1 are not suitable for practical purposes, the assumed angles θ and ϕ must be altered; this can only be done by trial. Another check to prove whether the

* An alternative method is to assume the velocity of flow to be constant throughout the impeller and equal to about 10 ft. per sec. Then θ and ϕ can be obtained from the velocity diagrams at inlet and outlet.

angles θ and ϕ are suitable is to plot the absolute velocity of the water as it passes through the pump, as shown in Fig. 134. The base of this graph represents the centre line path of the water through the pump as a measured distance. The vertical ordinate represents the absolute velocity of the water. The absolute velocities v_s and v_d are known; the absolute velocities V and V_1 can be obtained from the velocity triangles; the lengths of the path of the water at various points in the pump may be estimated from an existing pump of a similar design.

v_s is plotted at the point where the suction pipe is attached to the pump casing.

V is plotted at the beginning of the blade.

V_1 is plotted at the tip of the blade.

v_d is plotted at the point where the delivery pipe is attached to the casing.

In a well-designed pump, the absolute velocity of the water should increase smoothly from the suction pipe to the outlet of the impeller blade; it should then fall smoothly in the diffuser until the delivery pipe is reached, as shown in Fig. 134. Any abrupt change in the absolute velocity will cause a loss of head and should be avoided. If, after plotting these velocities, a suitable curve is not obtained, the assumed values of θ and ϕ must be altered.

The number of blades in the impeller vary with the size; six would be sufficient for a small pump and twelve for a large pump.

THE DIFFUSER. The diffuser should have about the same number of blades as the impeller, and as these blades are at rest, the relative velocity of the water to the blade will be the absolute velocity of the water. Hence, in order that the water will glide over the diffuser blade without shock, the blade at inlet of diffuser must be parallel to the absolute velocity V_1 of the water leaving the impeller; that is, to the angle β (Fig. 129). The water will glide over the diffuser blade, and as the area of flow becomes larger with the increased radius of the diffuser, the velocity will become smaller. The water will flow from the diffuser blade into the whirlpool chamber in a direction parallel to the diffuser blade at outlet, and as the flow of the water in the whirlpool chamber is circumferential, it follows, therefore, that the diffuser blade angle at outlet

should be as small as possible, which is about 10° to 15° . Hence, assume an angle of 10° for the diffuser blade an outlet.

After leaving the diffuser blade the water will pass through the whirlpool chamber into the discharge pipe. The object of the whirlpool chamber is to collect the water from the diffuser blades and to provide a passage to the discharge pipe; hence, it is spiral in shape owing to its cross-sectional area increasing uniformly up to the discharge pipe diameter; this allows for the increasing volume of water flowing through it. The full reduction of velocity from V_1 to v_d takes place in the diffuser, but as there is an unavoidable loss of about 2 ft. per sec. in the whirlpool chamber, the water should leave the diffuser blade with a circumferential velocity of $v_d + 2$. Then the outlet velocity triangle for the diffuser blade will be as shown in Fig. 135; it is a 10° right-angled triangle with a base of $v_d + 2$. The hypotenuse represents the actual velocity when leaving the blade, the radial component of this will be




FIG. 135

the velocity of the flow V_{f2} which is lost in shock in the whirlpool chamber.

Let b_2 = breadth of diffuser at outlet, in feet.

d_2 = diameter of diffuser at outlet, in feet.

Then, $Q = \pi d_2 b_2 V_{f2}$


From this equation b_2 can be found if d_2 is first assumed, as V_{f2} is already known.

As a first attempt, assume d_2 to be 6 in. greater than d_1 ; if this does not give a suitable value for b_2 another value for d_2 must be chosen.

A view of a single impeller Worthington pump* is shown in Fig. 136.

118. The Multi-stage Pump. A single impeller will produce a head of not more than 140 ft.; if a larger head than this is

* By courtesy of Messrs. Worthington-Simpson, Ltd.

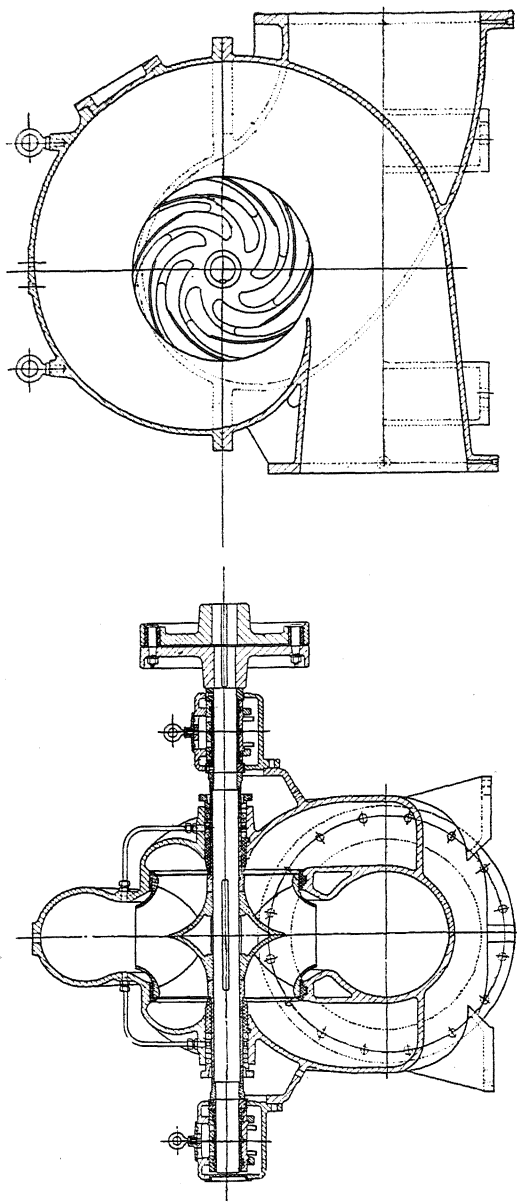

(Worthington-Simpson, Ltd.)

FIG. 136.—HORIZONTAL LOW-LIFT CENTRIFUGAL PUMP

required other impellers are fitted in series, so that the discharge from the first impeller is guided into the inlet of the second impeller. This is repeated with the third impeller, and so on, until the required head is reached; each impeller will increase the water pressure by the same amount. A pump of this type is called a multi-stage pump, and may be a two-stage, three-stage, etc., according to the number of impellers fitted in the casing. A view of a four-stage pump* is shown in Fig. 137.

All the impellers are keyed to the same shaft, and usually, all impellers and diffusers of one pump are identical; this has the advantage of reducing the labour in manufacture. The discharge from each diffuser is either circumferential or radial, this is collected by vanes attached to the casing which deflect the water into the eye of the next impeller. The last diffuser will discharge into the delivery pipe.

The design of an impeller and diffuser of a multi-stage pump is the same as for a single stage pump (Art. 117), the head used for design being the head per impeller.

EXAMPLES 11.

(1) A centrifugal pump is required to deliver 6,300 gallons of water per minute, against a head of 20 ft., at a speed of 600 revs. per min. Assuming that all the velocity head is lost, and that the actual head is 75 per cent of the theoretical head, find the diameter and breadth of the impeller at outlet. The velocity of flow, taken as constant, is 10 ft. per sec., and the blades are curved back 30° to the tangent at outlet. Also determine the inlet blade angles, if the inlet diameter is made half the outlet diameter. (London Univ., 1919.)

Ans.— $d = 1.25$ ft.; $b = 5.15$ in.; $\theta = 27^\circ$.

(2) A centrifugal pump is employed to pump water from a river into a canal. The pump is fixed with its centre at a height of 20 ft. above the level of the surface of the water in the river, and the mouth of the delivery pipe is 30 ft. above the level of the surface of the water in the river. The velocity of flow through the delivery pipe is 5 ft. per sec. If the angle made by the tangent to the blade with the tangent to the wheel at the discharge edge is 125° , and if the radial velocity of flow through the wheel is 5 ft. per sec., determine (1) the pressure head at the inlet circumference of the wheel, and (2) the pressure at the outlet circumference of the wheel. (London Univ., 1917.)

Ans.—(1) 13.61 ft. of water (abs.); (2) 30.39 ft. of water (abs.).

(3) A centrifugal pump is placed with the centre of the impeller at a height of 12 ft. above the water in the suction well. The suction pipe is 5 in. in diameter, and the discharge is 350 gallons per min. The total head through which the water is lifted is 75 ft. The vanes of the impeller at exit are set back and make an angle of 150° with the tangent to the wheel. The radial velocity at exit from the wheel is 10 ft. per sec., and the efficiency of the pump is 70 per cent. Determine (a) the velocity of the rim of the wheel;

* By courtesy of Messrs. Worthington-Simpson, Ltd.

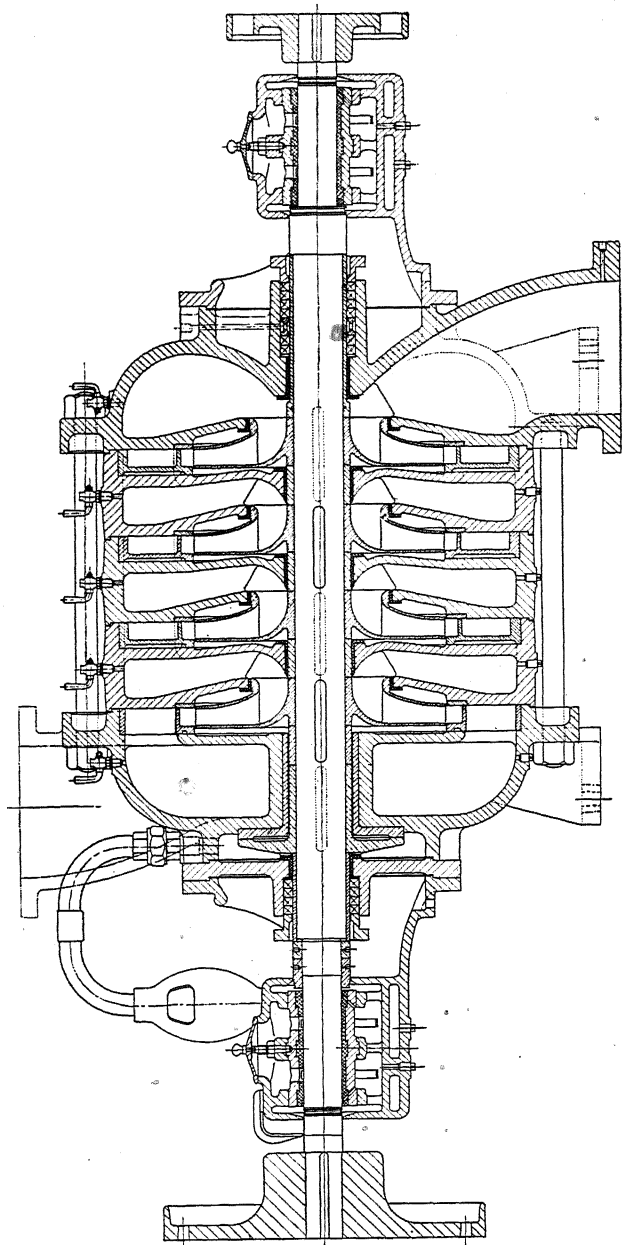


FIG 137.—FOUR-STAGE HIGH-LIFT TURBINE PUMP

(Worthington-Simpson, Ltd.)

(b) the pressures at the inlet and outlet of the wheel, on the assumption that the whole loss of head takes place after the water leaves the wheel. (London Univ., 1915.)

(a) 68.86 ft. per sec. ; (b) 21.27 and 86.3 ft. of water (abs.).

(4) A centrifugal pump having a wheel 1 ft. outside diameter rotates at 1,000 revs. per min. The vanes are radial at exit and are 3 in. wide. The velocity of radial flow through the wheel is 10 ft. per sec. The velocities in the suction and delivery pipes are 8 and 5 ft. per sec. respectively. Neglecting frictional losses, determine (1) the height through which the pump lifts ; (2) the horse-power of the pump. (London Univ., 1917.)

Ans.—(1) 84.61 ft. ; (2) 75.6 h.p.

(5) A centrifugal pump wheel is 20 in. external and 10 in. internal diameter. It runs at 950 revs. per min. The vanes are set back at an angle of 35° to the outer rim. If the radial velocity of the water through the wheel be maintained constant 6 ft. per sec., find the angle of the vanes at inlet, the velocity and direction of the water at outlet, and the work done by the wheel per pound of water. (London Univ., 1920.)

Ans.— $8\frac{1}{2}^\circ$; 74.4 ft. per sec. ; $4\frac{1}{2}^\circ$; 191 ft. lb.

(6) A centrifugal pump of 4 ft. diameter runs at 200 revs. per min., and pumps 66.5 cu. ft. per sec., the average lift being 20 ft. The angle which the vanes make at exit with the tangent to the impeller is 26° , and the radial velocity of flow is 8 ft. per sec. Determine the useful horse-power and the efficiency. Find also the lowest speed to start pumping against a head of 20 ft., the inner diameter of the impeller being 2 ft. (London Univ., 1913.)

Ans.—151 h.p. ; 60.6 per cent ; 198 revs. per min.

(7) Give a short account of the various methods which have been adopted to increase the efficiency of a centrifugal pump by altering the shape of the casing or chamber surrounding the impeller. (London Univ., 1921.)

(8) A centrifugal pump running at 390 revs. per min. discharges 4 cusecs. The impeller is 10 in. diameter at inlet and 21 in. at outlet ; the inlet width is 5 in., and the outlet width $3\frac{1}{2}$ in. Neglecting friction losses and the thickness of the vanes, what is the head pumped against if the vanes at outlet are curved back to give a discharge angle of 28° ? (A.M.I. Civil E., 1922.)

Ans.—34.4 ft.

(9) A centrifugal pump has an impeller 4 ft. in diameter, whose peripheral speed is 30 ft. per sec. Water enters the eye of the pump radially and is discharged with a velocity whose radial component is 5 ft. per sec. The vanes are curved backward at exit and make an angle of 30° with the periphery. If the pump discharges 120 cu. ft. per min. what will be the turning moment on the shaft ? (A.M. Inst. C.E., 1926.)

Ans.—166 lb. ft.

(10) The impeller of a centrifugal pump has an external diameter of 12 in. and an internal diameter of 6 in. If full of water, with the discharge pipe closed, what would be the difference of pressures at the outer and inner periphery, corresponding to a speed of 300 revs. per min ? (A. M. Inst. C. E., 1925.)

Ans.—2.87 ft. of water

CHAPTER XII

VISCOUS RESISTANCE OF FLUIDS

119. Viscous Flow. A fluid flowing steadily in a channel with smooth sides will have a velocity which varies over the cross-section of the channel. The layers of fluid adjoining the sides will be at rest; the layers adjacent to these will have a small velocity; there will then be a gradual increase in the velocity of the layers of fluid as the centre of the cross-section is approached. It follows from this that any two adjacent layers will be moving at different velocities, and there will be a resistance to flow between them. This resistance between two adjacent layers is known as viscosity.

The viscous resistance of a fluid is analogous to the shear resistance of a solid and is probably due to molecular attraction acting on planes inclined to the direction of flow. The frictional resistance of a fluid in a rough pipe is actually due to viscosity, as the rough sides of the pipe will cause cross-currents or eddies, the energy of which are ultimately destroyed by viscous resistance. The resistance of ships or other bodies moving in a fluid is due to viscosity; the movement of the body in the fluid sets up eddies and waves which are ultimately destroyed by viscosity.

The viscous resistance of a fluid will depend on its coefficient of viscosity, on the temperature, its density, its velocity, and on the size of the channel; an equation may be obtained which is applicable to all fluids, whether liquids or gases, which will hold for velocities below and above the critical velocity, and which is suitable for channels of all sizes, from small capillary tubes to large pipes. A viscous resistance is independent of the material of which the pipe is made.

120. Coefficient of Viscosity. The phenomenon of viscosity was first investigated by Sir Isaac Newton. Let Fig. 138 represent the section of a channel or pipe through which a fluid is flowing. Consider a longitudinal layer of fluid a distance of y from the side of channel and let the thickness of this layer be dy . Let the velocity of the layer at distance y from the side be v and let the velocity increase by dv over the

layer. Consider a section $abcd$ of the layer when the fluid is at rest; then, when the fluid is flowing, the section $abcd$ will distort to the shape $ae fd$ in one second. An enlarged view of the distorted section is shown in the figure. The resistance of the layer to this distortion is known as a viscous resistance, and will cause a stress, known as a viscous stress, to act on the layer. If the fluid in the whole channel section is considered to consist of similar layers, it follows that the

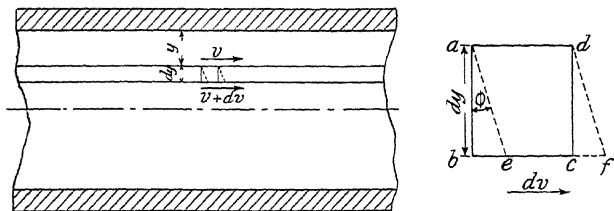


FIG. 138

velocity over the section will increase from the sides to the centre.

Let ϕ = angle of distortion due to viscosity

f = viscous stress

= resistance per unit area

μ = coefficient of viscosity of fluid.

The coefficient of viscosity of a fluid is defined as the relation between the viscous stress and the angle of distortion.

$$\text{Or,} \quad \mu = \frac{f}{\phi}$$

$$\text{But, from figure 138, } \phi = \frac{dv}{dy}$$

$$\text{Hence,} \quad \mu = \frac{f}{\frac{dv}{dy}} \quad . \quad . \quad . \quad . \quad . \quad (1)$$

$$\text{From which,} \quad f = \mu \frac{dv}{dy} \quad . \quad . \quad . \quad . \quad . \quad (2)$$

It is interesting to notice the analogy between this viscous distortion of a fluid and the shear distortion of a solid. Consider the solid $abcd$ (Fig. 139) under a shear stress q ; the solid will distort to the shape $ae fd$, ϕ being the angle of shear distortion. If C is the shear modulus or modulus of rigidity,

$$\text{then} \quad C = \frac{q}{\phi}$$

This is analogous to $\mu = \frac{f}{\phi}$, the coefficient of viscosity μ corresponding to the modulus of rigidity C , and the viscous stress f corresponding to the shear stress q .

If M , L , and T represent the fundamental dimensional units of mass, space, and time, the units of μ may be found by substituting these in Equation (1).

$$\begin{aligned} \mu &= f \div \frac{dv}{dy} \\ &= \frac{\text{force}}{\text{area}} \div \frac{\text{velocity}}{\text{distance}} \\ &= \frac{\text{mass} \times \text{acceleration}}{\text{area}} \div \frac{\text{velocity}}{\text{distance}} \\ &= \left(\frac{M}{L^2} \times \frac{L}{T^2} \right) \div \left(\frac{L}{TL} \right) \\ &= \frac{M}{TL} \end{aligned}$$

121. Effect of Temperature on Viscosity. Poiseuille investigated the viscous resistance of water flowing through capillary tubes* and found that the resistance to flow varied inversely with the temperature. This is, of course, well known in the case of oils, which flow more easily when warm.

Let μ = coefficient of viscosity at any temperature t in degrees centigrade.

μ_0 = coefficient of viscosity at 0°C .

* *Comptes Rendus*, 1840-41.




FIG. 139

Then, from Poiseuille's experiments,

$$\mu = \mu_0 \left(\frac{1}{1 + at + bt^2} \right)$$

where a and b are constants.

For water, Poiseuille found that

$$\begin{aligned} \mu &= \mu_0 \left(\frac{1}{1 + .03368t + .000221t^2} \right) \\ &= \frac{.0179}{(1 + .03368t + .000221t^2)} \text{ C.G.S. units} \\ &= \frac{.0179}{1 + .03368t + .000221t^2} \times \frac{30.5}{453.6 \times 32.2} \text{ ft. lb. units} \\ &= \frac{.00003716}{(1 + .03368t + .000221t^2)} \text{ ft. lb. units} \quad . \quad . \quad (1) \end{aligned}$$

The relation between the coefficient of viscosity and the density is known as the kinematic viscosity.

Let v = kinematic viscosity
 ρ = density of fluid

Then $v = \frac{\mu}{\rho}$

Substituting for μ from Equation (1), for water.

$$\begin{aligned} v &= \left(\frac{.00003716}{1 + .03368t + .000221t^2} \right) \times \frac{32.2}{62.4} \\ &= \frac{.0000192}{(1 + .03368t + .000221t^2)} \text{ sq. ft. per sec.} \quad . \quad . \quad (2) \end{aligned}$$

It will be noticed that the units of the kinematic viscosity v are $\frac{L^2}{T}$; for,

$$\begin{aligned} v &= \mu \div \rho \\ &= \frac{M}{LT} \div \frac{M}{L^3} \\ &= \frac{L^2}{T} \end{aligned}$$

122. Stream Line and Turbulent Flow. The experiments of Professor Osborne Reynolds on stream line and turbulent flow of fluids have been described in Art. 60. Reynolds found that

$$\begin{aligned} v_c &= \frac{2000 \mu}{d\rho} \\ &= \frac{2000 \nu}{d} \end{aligned}$$

where v_c = lower critical velocity

and d = diameter of pipe.

This may be written

$$\frac{v_c d}{\nu} = 2000$$

and applies to any fluid and to any system of units.

The quantity $\frac{vd}{\nu}$ is sometimes called the Reynolds' criterion and is very important with problems on viscosity.

Exhaustive experiments on the flow of fluids in pipes were carried out by Stanton and Pannel.* Their results were plotted with $\log. \frac{vd}{\nu}$ as base and $\frac{R}{\rho v^2}$ as ordinate; where R is the viscous resistance per square foot of wetted surface. The curve obtained is shown in Fig. 140. The portion AB of the curve represents their experimental results on stream line flow, the point B being the lower critical velocity. The portion BC represents the results for the state of change from stream line flow to turbulent flow, the point C being the higher critical velocity. The portion CD of the curve represents their experimental results on turbulent flow.

At the lower critical velocity, point B , it was found from the curve that

$$\frac{vd}{\nu} = 2000$$

* *Phil. Trans.*, Vol. 214.

At the higher critical velocity, point *C*, it was found that

$$\frac{vd}{\nu} = 2500$$

Hence it follows, that for any fluid in motion, if the quantity $\frac{vd}{\nu}$ is less than 2,000 the flow is stream line ; if the quantity $\frac{vd}{\nu}$ is greater than 2,500 the flow is turbulent. Between these two values the fluid would be in a state of transition from one type of flow to the other. These values hold for all fluids, at all velocities and temperatures.

Stanton and Pannell also plotted on their curve the results of former experimenters on pipe flow and found that these results approximated to their own curve. The complete results plotted by Stanton and Pannell included experiments on the flow of water, air, and oil, through pipes varying in diameter from small capillary tubes to large water supply pipes of 5 ft. diameter. It was found that, excepting for a slight deviation due to the roughness of the inside of the large pipes, they all followed the curve of Fig. 140.

EXAMPLE.

The density of a fluid *A* is 0.8, and its coefficient of viscosity is .01 in C.G.S. units. The density of a second fluid *B* is 0.6 and its coefficient of viscosity is .005. Which will have the lower critical velocity under given conditions of flow ? What will be the ratio of the critical velocities ? (London Univ., 1926.)

FLUID *A*.

$$\nu = \frac{\mu}{\rho} = \frac{.01}{.8} = .0125$$

For critical velocity,

$$\frac{v_c d}{\nu} = 2000$$

$$\text{Hence, } v_c = \frac{.0125 + 2000}{d}$$

$$= \frac{25}{d} \text{ cm. per sec.}$$

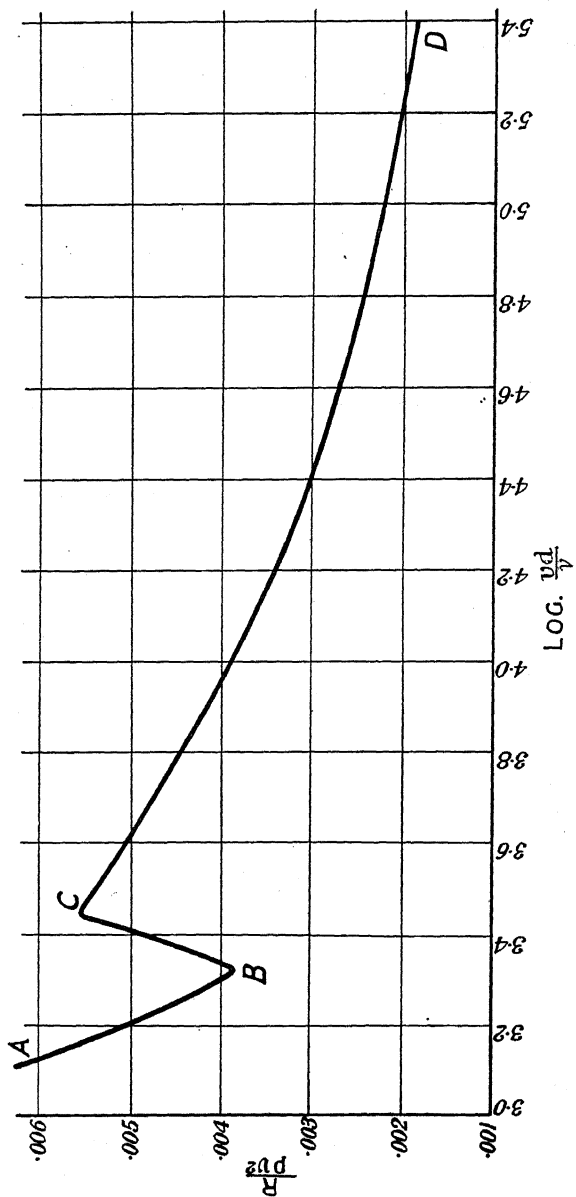


FIG. 140

FLUID *B*.

$$r = \frac{\mu}{\rho} = \frac{.005}{.6} = .00833$$

Then,

$$r_c = \frac{r \times 2000}{d}$$

$$= \frac{.00833 \times 2000}{d}$$

$$= \frac{16.66}{d}$$

Hence, fluid *B* has the lower critical velocity.

$$\text{Ratio of critical velocities} = \frac{25}{d} \div \frac{16.66}{d}$$

$$= 1.5$$




FIG. 141

123. Viscous Flow through Round Pipes. An equation for the viscous resistance in a round pipe may be obtained by equating the force on the fluid, due to the drop in pressure, to the viscous resistance. Consider a fluid to be flowing along a pipe, the cross-section of which is shown in Fig. 141, and consider a cylinder of fluid of radius y and of unit length.

Let r = radius of pipe

v = velocity of fluid

i = slope of hydraulic gradient

h = head lost in resistance per unit length of pipe

p = pressure drop per unit length.

$$\left. \begin{array}{l} \text{Viscous resistance of cylinder} \\ \text{of radius } y \text{ and unit length} \end{array} \right\} = \begin{array}{l} \text{surface area} \times \text{viscous} \\ \text{stress} \end{array}$$

$$= 2\pi y \times f$$

$$= -2\pi y \mu \frac{dv}{dy} \quad . \quad . \quad (1)$$

by substituting for f from Equation (2), Art. 120. It should be noted that $\frac{dv}{dy}$ will be negative as y is now measured outwards

from the centre. In Art. 120 y was measured inwards from the sides.

$$\left. \begin{array}{l} \text{Difference of total pressure} \\ \text{on ends of cylinder} \end{array} \right\} = \pi y^2 \times p$$

$$= \pi y^2 \rho g i \quad . \quad . \quad . \quad (2)$$

as p = density \times loss of head per unit length

$$= \rho g \times i$$

As the viscous resistance of cylinder must equal the net force on the ends of the cylinder, Equation (1) will equal Equation (2).

$$\text{Hence, } -2\pi y \mu \frac{dv}{dy} = \pi y^2 \rho g i$$

$$\text{From which, } dv = -\frac{\rho g i y dy}{2\mu}$$

$$\text{Integrating, } v = -\frac{\rho g i y^2}{4\mu} + c_1 \quad . \quad . \quad . \quad (3)$$

where c_1 is the constant of integration.

When $y = r$, $v = 0$, as the fluid is stationary at the sides,

$$\text{hence, } 0 = -\frac{\rho g i r^2}{4\mu} + c_1$$

$$\text{From which, } c_1 = \frac{\rho g i r^2}{4\mu}$$

Let v_y = velocity at radius y ,

$$\text{Then, from Equation (3), } v_y = \frac{\rho g i}{4\mu} (r^2 - y^2)^* \quad . \quad . \quad . \quad (4)$$

Next consider a hollow cylinder of the fluid of radius y and thickness dy (Fig. 142). Let Q be the total quantity flowing through the pipe per second.

* It will be noticed from this equation that maximum velocity occurs when $y = 0$; then maximum velocity = $\frac{\rho g i r^2}{4\mu}$.




FIG. 142

where c and n are constants depending on whether the flow is stream line or turbulent.

Let R = viscous resistance per unit area of wetted surface.

Then, as resistance at sides is equal to net force on fluid,

$$\begin{aligned} 2 \pi r \times R &= p \times \pi r^2 \\ &= i \rho g \times \pi r^2 \end{aligned} \quad \text{as } p = i \rho g$$

Hence,
$$R = \frac{\rho i g r}{2}$$

Putting $m = \frac{r}{2}$ and dividing both sides by v^2

$$\frac{R}{\rho v^2} = \frac{m i g}{v^2} \quad . \quad . \quad . \quad . \quad . \quad . \quad (7)$$

Combining Equations (6) and (7),

$$\frac{R}{\rho v^2} = \frac{m i g}{v^2} = C \left(\frac{dv}{v} \right)^n \quad . \quad . \quad . \quad . \quad . \quad . \quad (8)$$

which is the complete form of the equation for the flow of fluids in pipes.

If the term $\frac{dv}{v}$ is less than 2,000, the flow will be stream line and will belong to the portion AB of the curve in Fig. 140 ; by plotting $\log \frac{R}{\rho v^2}$ and $\log \frac{vd}{v}$ of this portion of the curve the values of the constants C and n for stream line flow may be obtained.

If the term $\frac{dv}{v}$ is more than 2,500, the flow will be turbulent and will be represented by the portion CD of the curve of Fig. 140. Then, by plotting $\log \frac{R}{\rho v^2}$ and $\log \frac{vd}{v}$ for this portion of the curve the values of the constants C and n for turbulent flow are obtained.

For stream line flow,

$$\frac{dv}{v} \text{ is less than } 2,000$$

$$C = 8$$

$$n = -1$$

For turbulent flow,

$\frac{dv}{v}$ is greater than 2,500

$$C = .032^*$$

$$n = -.23^*$$

In all problems on pipe flow the value of $\frac{dv}{v}$ must first be worked out; then, if less than 2,000, use the values $C = 8$ and $n = -1$, and solve from Equation (6). If the value of $\frac{dv}{v}$ is more than 2,500, use the values $C = .032$ and $n = -.23$, and solve from Equation (6).

It is interesting to notice that Equation (6) is another form of the well-known Chezy formula (Art. 59). By substituting in Equation (6), $m = \frac{d}{4}$ and $i = \frac{h}{l}$ the equation becomes—

$$h = \frac{4flv^2}{2gd}$$

where the coefficient $f = 2C\left(\frac{vd}{v}\right)^n$. Hence the Chezy formula could be used for viscous flow if the coefficient f is a function of the velocity, the diameter, the density, and the temperature.

The viscosity formula of Equation (6) is an alternative method for calculating the flow of fluids in pipes and gives results more accurate than the Chezy formula, although practical engineers still use the latter. The Chezy formula does not allow for the temperature of the fluid, which makes a considerable difference to the flow. For rough approximations the Chezy formula is the simpler to use, and it would be very difficult to apply the viscosity formula to some of the more complicated problems on pipe flow, given in Chapter VI, in which all losses must be expressed in terms of the velocity head.

EXAMPLE 1.

Water flows along a pipe of $\frac{1}{2}$ in. diameter and 100 ft. long; the pipe is running full. Find the loss of head when: (a) the temperature is 5°C . and the velocity is 1 ft. per sec.; (b) the temperature is 70°C . and the velocity is 10 ft. per sec.

* There is a slight variation in the values of C and n given by different authorities. From the author's plotting, $C = .048$ and $n = -.27$.

(a) From Equation (2), Art. 121,

$$\begin{aligned} \nu &= \frac{.00001926}{1 + (.03368 \times 5) + (.000221 \times 25)} \\ &= .0000164 \end{aligned}$$

Next find the value of the term $\frac{vd}{\nu}$

$$\frac{vd}{\nu} = \frac{1}{.0000164} \times \frac{1}{4 \times 12} = 1270$$

As this is less than 2,000, flow is stream line, hence $n = -1$ and $C = 8$.

Applying Equation (6),

$$\begin{aligned} \frac{m \dot{v} g}{v^2} &= 8 \left(\frac{vd}{\nu} \right)^{-1} \\ &= 8(1270)^{-1} \\ &= .0063 \end{aligned}$$

From which,

$$\begin{aligned} i &= \frac{v^2}{\frac{d}{4} g} \times .0063 \\ &= \frac{1 \times .0063 \times 4}{\frac{1}{4} \times \frac{1}{1^2} \times 32.2} \\ &= .0376 \text{ ft.} \end{aligned}$$

But,

$$\begin{aligned} h &= i \times l \\ &= .0376 \times 100 \\ &= 3.76 \text{ ft. of water.} \end{aligned}$$

(b)

$$\begin{aligned} \nu &= \frac{.00001926}{1 + (.03368 \times 70) + (.000221 \times 4900)} \\ &= .00000435 \end{aligned}$$

Then,

$$\frac{vd}{\nu} = \frac{10}{.00000435 \times 4 \times 12} = 48,000$$

As this is more than 2,500, flow is turbulent, hence $n = -.23$ and $C = .032$

Using Equation (6),

$$\frac{m i g}{v^2} = .032(48,000) \cdot .23$$

$$= .00272$$

$$\begin{aligned} \text{From which, } i &= \frac{.00272 v^2}{\frac{d}{4} \times g} \\ &= \frac{.00272 \times 100 \times 4}{\frac{1}{2} \times \frac{1}{1^2} \times 32.2} \\ &= 1.62 \end{aligned}$$

$$\begin{aligned} \text{But, } h &= i \times l \\ &= 1.62 \times 100 \\ &= 162 \text{ ft. of water.} \end{aligned}$$

EXAMPLE 2.

Oil at a temperature of 60° F. has a weight of 57.2 lb. per cu. ft. and a kinematic viscosity of .0205 ft. sec. units. Find the horse-power required to pump 20 tons of this oil per hour along a pipe line 6 in. diameter and 1,000 ft. long.

$$\begin{aligned} \text{Quantity per sec.} &= \frac{\text{weight per sec.}}{\text{weight per cu. ft.}} \\ &= \frac{20 \times 2240}{57.2 \times 3600} = .218 \text{ cu. ft.} \end{aligned}$$

$$v = \frac{Q}{\text{area}} = \frac{.218}{\frac{\pi}{4} \times \frac{1}{4}} = 1.11 \text{ ft. per sec.}$$

$$\text{Then, } \frac{vd}{\nu} = \frac{1.11 \times \frac{1}{2}}{.0205} = 27.1$$

As this is less than 2,000, flow is stream line, hence $n = -1$ and $c = 8$.

Using Equation (6),

$$\begin{aligned} \frac{m i g}{v^2} &= 8(27.1)^{-1} \\ &= .296 \end{aligned}$$

$$\begin{aligned} \text{From which, } i &= \frac{.296 \times (1.11)^2 \times 4}{\frac{1}{2} \times 32.2} \\ &= .0907 \end{aligned}$$

$$\begin{aligned}\text{But,} \quad h &= i \times l \\ &= .0907 \times 1000 \\ &= 90.7 \text{ ft. of oil}\end{aligned}$$

$$\begin{aligned}\text{Then, horse-power required} &= \frac{Wh}{550} \\ &= \frac{20 \times 2240}{3600} \times \frac{90.7}{550} \\ &= 2.05\end{aligned}$$

124. **Viscous Flow between Horizontal Flat Surfaces.** The viscous flow of a fluid between parallel surfaces may be dealt with in a manner similar to the previous article. This type




FIG. 143

of flow occurs when leakage takes place between two surfaces such as between the piston and the cylinder walls.

Consider two parallel surfaces at a distance of t apart through which a fluid is flowing; let b be the breadth of the surfaces and consider unit length. Fig. 143 represent a cross-sectional view of the plates, perpendicular to the direction of flow. Consider a central layer of the fluid of thickness $2y$; that is, its boundaries are y from the centre. Then, the longitudinal viscous resistance of the layer will equal the longitudinal force on the ends due to the pressure drop.

$$\begin{aligned}\left. \begin{array}{l} \text{Viscous resistance of} \\ \text{layer per unit length} \end{array} \right\} &= \text{stress} \times \text{wetted area} \\ &= -\mu \frac{dv}{dy} \times 2b\end{aligned}$$

This will be negative, as y in the term $\frac{dv}{dy}$ was measured from the sides (Art. 120).

$$\begin{aligned}\left. \begin{array}{l} \text{Longitudinal force on} \\ \text{layer per unit length} \end{array} \right\} &= \text{cross-sectional area} \times \text{pressure drop} \\ &= 2by \times \rho gi \\ \text{as pressure drop} &= \rho gh, \text{ and } h = i \text{ for unit length.}\end{aligned}$$

Hence, equating these two equations,

$$-\mu \frac{dv}{dy} 2b = 2by\rho g i$$

From which, $dv = -\frac{\rho g i y dy}{\mu}$

Integrating $v = -\frac{\rho g i}{\mu} \int y dy$

$$= -\frac{\rho g i y^2}{2\mu} + C_1 \quad . \quad . \quad . \quad (1)$$

where C_1 is the constant of integration.




FIG. 144

When $y = \frac{t}{2}$, $v = 0$, as there is no motion at the sides. Putting this limiting condition in Equation (1),

$$0 = -\frac{\rho g i t^2}{8\mu} + C_1$$

From which, $C_1 = \frac{\rho g i t^2}{8\mu}$

Substituting this value in Equation (1),

$$v_y = \frac{\rho g i}{2\mu} \left(\frac{t^2}{4} - y^2 \right) \quad . \quad . \quad . \quad (2)$$

where v_y is the velocity at any distance y .

The maximum velocity in the whole cross-section is when $y = 0$. Then, from Equation (2),

$$\text{maximum velocity} = \frac{\rho g i t^2}{8\mu} \quad . \quad . \quad . \quad (3)$$

Next consider a thin layer of the fluid at y from the centre and thickness dy (Fig. 144); let dQ be the quantity flowing through layer per second. Then,

$$\begin{aligned} dQ &= b dy \times v_y \\ &= b dy \times \frac{\rho g i}{2\mu} \left(\frac{t^2}{4} - y^2 \right) \end{aligned}$$

Integrating for total quantity between the surfaces,

$$\begin{aligned} Q &= \frac{b \rho g i}{2\mu} \int_{-\frac{t}{2}}^{\frac{t}{2}} \left(\frac{t^2}{4} - y^2 \right) dy \\ &= \frac{b \rho g i}{2\mu} \left[\frac{t^2 y}{4} - \frac{y^3}{3} \right]_{-\frac{t}{2}}^{\frac{t}{2}} \\ &= \frac{b \rho g i t^3}{12\mu} \end{aligned}$$

$$\begin{aligned} \text{Mean velocity of flow} \quad &= v = \frac{Q}{\text{cross-sectional area}} \\ &= \frac{b \rho g i t^3}{12\mu} \div bt \\ &= \frac{\rho g i t^2}{12\mu} \quad . \quad . \quad . \quad . \quad (4) \end{aligned}$$

It will be noticed by comparing Equations (3) and (4) that the mean velocity is two-thirds of the maximum velocity.

By substituting the values $m = \frac{t}{2}$ and $\nu = \frac{\mu}{\rho}$ Equation (4) becomes—

$$6 \left(\frac{v t}{\nu} \right)^{-1} = \frac{m i g}{\nu^2} \quad . \quad . \quad . \quad . \quad (5)$$

which is a similar form to Equation (6), Art. 123, which was deduced from a round pipe.

Let R = viscous resistance per sq. ft. of wetted surface.

Then, viscous resistance per unit length

= (area of cross-section) \times pressure drop per unit length

Or, $R \times 2b = p \times t b$

$$\begin{aligned} \text{from which,} \quad R &= \rho g i \times \frac{t}{2} \quad (\text{as } p = \rho g i) \\ &= \rho g i m \end{aligned}$$

Dividing throughout by v^2 ,

$$\frac{R}{\rho v^2} = \frac{m i g}{\nu^2} \quad . \quad . \quad . \quad . \quad (6)$$

Combining Equations (5) and (6),

$$\frac{R}{\rho v^2} = \frac{m i g}{v^2} = C \left(\frac{v t}{v} \right)^n \quad . \quad . \quad . \quad (7)$$

where C and n are constants depending on the type of flow and which are determined from experimental results. It will be noticed that Equation (7) is the same form as Equation (8) of Art. 123.

It will also be noticed that Equation (5) reduces to the same form as the Chezy formula, $v = C \sqrt{m i}$, for the flow in open channels (Art. 70), if the Chezy constant C is written

$$\sqrt{\frac{v t g}{6v}}$$

EXAMPLE.

The radial clearance between a hydraulic plunger and the cylinder walls is .004 in. ; the length of the plunger is 12 in. and the diameter 4 in. Find the velocity of leakage and the rate of leakage past the plunger at an instant when the difference of pressure between the two ends of the plunger is 30 ft. of water. The temperature of the water is 10° C.

The flow through the clearance area will be the same as the flow between two parallel surfaces.

Assuming the whole of the pressure head is lost,

$$i = \frac{h_f}{l} = \frac{30}{1}$$

From Equation (2), Art. 121,

$$\begin{aligned} v &= \frac{.0000192}{1 + (.03368 \times 10) + (.0002221 \times 100)} \\ &= \frac{.0000192}{1.359} = .0000141 \end{aligned}$$

From Equation (4),

$$\begin{aligned} \text{mean velocity} = v &= \frac{g i t^2}{12\nu} \\ &= \frac{32.2 \times 30 \times .004^3}{12 \times .0000141 \times 144} \\ &= .634 \text{ ft. per sec.} \end{aligned}$$

$$\begin{aligned}
 \text{Rate of flow} &= Q = v \times \text{area of annular ring} \\
 &= v \times \pi D t \\
 &= .634 \times \pi \times \frac{4}{12} \times \frac{.004}{12} \\
 &= .000221 \text{ cu. ft. per sec.}
 \end{aligned}$$

125. Resistance of Oiled Bearings. A shaft revolving in an oiled bearing will be separated from the bearing by a thin film of oil. The layer of this film adjacent to the bearing will be at rest, whilst the layer adjacent to the shaft will be revolving with the same velocity as the shaft. The resistance of the oil film will, therefore, be due to the viscosity of the oil.

$$\begin{aligned}
 \text{Let } t &= \text{thickness of oil film} \\
 D &= \text{diam. of shaft} \\
 n &= \text{speed of shaft in revs. per min.} \\
 l &= \text{length of bearing.}
 \end{aligned}$$

Then, from Art. 120,

$$f = \mu \frac{dv}{dy}$$

where f is the resistance per unit area. In this case, as the oil film is very thin, dv will be the tangential velocity of the shaft and dy will be the thickness of the oil film.

$$\begin{aligned}
 \text{Then, } f &= \mu \frac{v}{t} \\
 &= \mu \times \frac{\pi D n}{60t}
 \end{aligned}$$

Tangential resistance on bearing $= f \pi D l$

$$\begin{aligned}
 \text{resisting torque} &= f \pi D l \times \frac{D}{2} \\
 &= \frac{\mu \pi^2 D^3 l n}{120 t}
 \end{aligned}$$

Horse-power absorbed in viscosity

$$= \frac{\text{torque in lb. ft.} \times 2 \pi n}{33,000}$$

EXAMPLE.

Define the terms "coefficient of viscosity" and "kinematical viscosity." A shaft 4 in. diameter runs in a bearing of length 8 in., the two surfaces being separated by a film of oil .001 in thick. If the coefficient of viscosity of the oil is 1.53 C.G.S. units, find the torque necessary to rotate the shaft at 30 revs. per min. against the viscous resistance of the oil. (London Univ., 1925.)

$$\begin{aligned}
 \mu &= 1.53 \text{ C.G.S. units} \\
 &= 1.53 \times \frac{30.5}{453.6 \times 32.2} \text{ ft. lb. units} \\
 &= .0032 \text{ ft. lb. units} \\
 \text{Viscous torque} &= \frac{\mu \pi^2 D^3 l n}{120 t} \\
 &= \frac{.0032 \times \pi^2 \times (\frac{1}{3})^3 \times \frac{2}{3} \times 30}{120 \times \frac{.001}{12}} \text{ lb. ft.} \\
 &= 2.34 \text{ lb. ft.}
 \end{aligned}$$

126. Principle of Dimensional Similarity. Lord Rayleigh has shown* that Reynolds' results on the flow of water through pipes are only one particular case of a general principle applicable to all types of fluid resistance. This general principle is known as the principle of dimensional similarity, and is obtained by balancing the fundamental units on each side of the equation. The following are the fundamental units for the quantities used—

Mass	= M
linear dimension	= L
time	= T
velocity	= LT^{-1}
acceleration	= LT^{-2}
force	= mass \times acceleration = MLT^{-2}
	$\mu = ML^{-1}T^{-1}$ (Art. 120)
	$\rho = \text{mass} \div \text{volume} = ML^{-3}$
	$\nu = L^2T^{-1}$ (Art. 121)

Case 1.—RESISTANCE DUE TO VISCOSITY ONLY. It is known that the viscous resistance of a fluid depends on the wetted area, the velocity, the density, and the coefficient of

* *Scientific Papers*, Vol. vi, Art. 392.

viscosity. Assuming the actual law of variation to be unknown, the equation for the resistance may be written,

$$R = k \rho^a \mu^b L^c v^d \quad . \quad . \quad . \quad . \quad (1)$$

where a , b , c , and d are unknown indices, R is the total resistance, and k is a constant to be determined experimentally. Now the fundamental units for each side of this equation must balance; hence, by putting the total resistance R as a force, and by substituting the fundamental units for ρ , μ , and v , the equation becomes,

$$MLT^{-2} = k(ML^{-3})^a (ML^{-1}T^{-1})^b L^c (LT^{-1})^d$$

$$\text{That is, } MLT^{-2} = kM^a L^{-3a} M^b L^{-b} T^{-b} L^c L^d T^{-d}$$

Now, as the indices of M on each side of the equation are equal,

$$1 = a + b$$

$$\text{From which, } a = 1 - b \quad . \quad . \quad . \quad . \quad . \quad (2)$$

Also, as the indices of L on each side of the equation are equal,

$$1 = -3a - b + c + d \quad . \quad . \quad . \quad . \quad (3)$$

Also, as the indices of T on each side of the equation are equal,

$$-2 = -b - d$$

$$\text{From which, } d = 2 - b \quad . \quad . \quad . \quad . \quad . \quad (4)$$

Substituting the values of Equations (2) and (4) in Equation (3),

$$1 = -3(1 - b) - b + c + (2 - b)$$

$$\text{From which, } c = 2 - b \quad . \quad . \quad . \quad . \quad . \quad (5)$$

Substituting the values of a , c , and d in Equation (1),

$$\begin{aligned} R &= k \rho^{1-b} \mu^b L^{2-b} v^{2-b} \\ &= k \rho L^2 v^2 \left(\frac{\mu}{\rho L v} \right)^b \quad . \quad . \quad . \quad . \quad (6) \end{aligned}$$

$$\text{But } v = \frac{\mu}{\rho}$$

$$\text{hence, } R = k \rho L^2 v^2 \left(\frac{v}{L v} \right)^b \quad . \quad . \quad . \quad . \quad (7)$$

It will be noticed that this is the same equation as that obtained by Froude (Art. 55) if the coefficient f' is written as

$$\rho k \left(\frac{v}{Lv} \right)^b$$

It will also be noticed, from Equation (7), that true dynamical similarity between two bodies can only be obtained when the

term $\frac{v}{Lv}$ is the same for both, as it is necessary that the unknown

term $\left(\frac{v}{Lv} \right)^b$ should cancel when comparing the two resistances.

Equation (7) is usually written,

$$R = \rho L^2 v^2 \phi \left(\frac{v}{Lv} \right) \quad . \quad . \quad . \quad . \quad . \quad (8)$$

where ϕ means "a function of."

Case 2.—RESISTANCE DUE TO VISCOSITY AND GRAVITY. This is the case of ships moving in water against a viscous resistance and a wave resistance. The resistance to the formation of surface waves is a gravity resistance, as the wave gains in potential energy. Hence the combined resistance may be written,

$$R = k \rho^a \mu^b L^c v^d g^e$$

where k is a constant to be determined experimentally.

Substituting in the above terms their fundamental units, the equation becomes,

$$\begin{aligned} MLT^{-2} &= (ML^{-3})^a (ML^{-1}T^{-1})^b L^c (LT^{-1})^d (LT^{-2})^e \\ &= M^a L^{-3a} M^b L^{-b} T^{-b} L^c L^d T^{-d} L^e T^{-2e} \end{aligned}$$

Equating the indices of M ,

$$1 = a + b$$

From which,

$$a = 1 - b \quad . \quad . \quad . \quad . \quad (9)$$

Equating the indices of L ,

$$1 = -3a - b + c + d + e \quad . \quad . \quad . \quad . \quad (10)$$

Equating the indices T ,

$$-2 = -b - d - 2e$$

From which,

$$d = 2 - b - 2e \quad . \quad . \quad . \quad . \quad (11)$$

Substituting Equations (9) and (11) in (10),

$$\begin{aligned} 1 &= 3 + 3b - b + c + 2 - b - 2e + e \\ &= -1 + b + c - e \end{aligned}$$

From which,

$$C = 2 - b + e$$

Substituting the above values of a , d , and c in the original equation for R ,

$$\begin{aligned} R &= k \rho^{1-b} \mu^b L^{2-b+e} v^{2-b-2e} g^e \\ &= k \rho L^2 v^2 \left(\frac{\mu}{\rho L v} \right)^b \left(\frac{Lg}{v^2} \right)^e \end{aligned}$$

which may be written,

$$R = \rho L^2 v^2 \phi \left(\frac{v}{Lv} \times \frac{Lg}{v^2} \right) \quad (12)$$

where ϕ means "a function of" and where $v = \frac{\mu}{\rho}$

For true dynamical similarity between two bodies the term

$$\phi \left(\frac{Lv}{v} \times \frac{Lg}{v^2} \right)$$

must be equal in both cases, as the function represented by ϕ is unknown; hence, it is necessary for the whole term to cancel when comparing the resistance of two similar bodies.

That is, $\frac{v}{Lv}$ must be equal for both bodies

and $\frac{Lg}{v^2}$ must be equal for both bodies.

If the floating body is completely submerged in the fluid to a great depth, there will be no formation of gravity waves; in this case the resistance is due to viscosity only. Such a case occurs with the resistance of submarines and airships.

127. Applications of Principle of Dynamical Similarity. The principle of dynamical similarity is used when testing models in order to predict the resistance of large bodies. Before building a new type of ship it is usual to make a model of the same proportions and measure its resistance experimentally. From the results obtained the resistance of the ship can be calculated. The model is propelled at a speed which will give true dynamical similarity; this speed is known as the corresponding speed.

(a) **RESISTANCE DUE TO VISCOSITY ONLY.** This is the case for deeply submerged bodies such as submarines and airships and for the frictional resistance of surface ships.

This type of resistance is given by Equation (8) (Art. 126).

Let suffix m refer to model. Then,

$$R = \rho L^2 v^2 \phi\left(\frac{v}{Lv}\right) \text{ for ship}$$

and
$$R_m = \rho_m L_m^2 v_m^2 \phi\left(\frac{v_m}{L_m v_m}\right) \text{ for model}$$

True dynamical similarity can only be obtained when

$$\left(\frac{v}{Lv}\right) = \left(\frac{v_m}{L_m v_m}\right)$$

in which case, these terms, which are of an unknown function, will cancel.

If the model is tested in the same fluid as the ship, true dynamical similarity will be obtained when

$$Lv = L_m v_m \quad \text{as } v \text{ will then equal } v_m.$$

In which case,
$$v_m = v \frac{L}{L_m}$$

This is known as the corresponding speed, because if the model is tested at this speed the term $\phi\left(\frac{v}{Lv}\right)$ is the same for both ship and model and will cancel. Then

$$\frac{R}{R_m} = \frac{L^2 v^2}{L_m^2 v_m^2} = 1 \text{ (by substituting for } v_m\text{)}$$

Thus, the resistance of the model would be the same as that of the ship. The corresponding speed in this case is too large for practical purposes, but by testing the model in a fluid having a kinematic viscosity much less than that of the ship's fluid, a smaller corresponding speed may be obtained. In which case,

$$\frac{v}{Lv} = \frac{v_m}{L_m v_m}$$

hence,
$$v_m = v \times \frac{L}{L_m} \times \frac{v_m}{v}$$

This type of resistance also occurs in fluids flowing through pipes and channels; it is possible to predict the resistance to flow in a channel by testing the flow in a similar channel at the corresponding speed. In this case the corresponding speed will be when the term $\frac{v}{Lv}$ is the same for both channels.

Then the corresponding speed will be when

$$\frac{v_1}{L_1 v_1} = \frac{v_2}{L_2 v_2}$$

where the suffixes 1 and 2 apply to the respective channels. It should be noticed that Equation (8) (Art. 126) is the same form as Equation (8) (Art. 123). This will be seen by putting R in Equation (8) (Art. 126) as the resistance per unit area of wetted surface,

$$\text{Then,} \quad R = \rho v^2 \phi \left(\frac{v}{Lv} \right)$$

$$\text{Or} \quad \frac{R}{\rho v^3} = \phi \left(\frac{v}{Lv} \right)$$

which is the same form as Equation (8) (Art. 123).

(b) RESISTANCE DUE TO GRAVITY ONLY. It was shown in Art. 126 that the resistance of a surface ship was partly due to surface friction, or viscosity, and partly due to wave formation, or gravity. The combined resistance was proved to be

$$R = \rho L^2 v^2 \phi \left(\frac{v}{Lv} \times \frac{Lg}{v^2} \right)$$

(Equation 12. Art. 126.)

For true dynamical similarity between ship and model both of the following conditions must hold,

$$(1) \quad \frac{v}{Lv} = \frac{v_m}{L_m v_m}$$

$$(2) \quad \frac{Lg}{v^2} = \frac{L_m g}{v_m^2}$$

Case 1 being the condition for viscous resistance and Case 2 the condition for wave resistance. If both model and ship are floating in the same fluid, the corresponding speed for Case 1 is when

$$Lv = L_m v_m$$

$$\text{Or,} \quad v_m = v \frac{L}{L_m}$$

For case 2, the corresponding speed is when

$$\frac{L}{v^2} = \frac{L_m}{v_m^2}$$

$$\text{Or,} \quad v_m = v \sqrt{\frac{L_m}{L}}$$

Hence, the corresponding speed varies in each case; it would, therefore, be impossible to test the model for the total resistance. To overcome this difficulty it is usual to calculate the frictional, or viscous, resistance of the ship and model from the coefficient of friction and surface area. The total resistance of the model is then measured experimentally at the corresponding speed for wave resistance; that is, at a corresponding speed proportional to $\sqrt{\frac{L_m}{L}}$. By subtracting the frictional resistance from the total resistance of model the wave resistance is obtained. The wave resistance of the ship is then obtained by proportion; this, added to the frictional resistance of the ship, will give the total resistance,

Let R_w = wave resistance of ship

R_f = frictional resistance of ship

r_w = wave resistance of model

r_f = frictional resistance of model

Then, $R = R_w + R_f$ (1)

and, $R_m = r_w + r_f$ (2)

For wave resistance only,

$$\frac{R_w}{r_w} = \frac{\rho L^2 v^2 \phi \left(\frac{Lg}{v^2} \right)}{\rho_m L_m^2 v_m^2 \phi \left(\frac{L_m g}{v_m^2} \right)}$$

Then, for corresponding speed, in order that the last term of each will cancel,

$$\frac{v_m}{v} = \sqrt{\frac{L_m}{L}}$$

$$\begin{aligned} \text{Then, } \frac{R_w}{r_w} &= \frac{\rho L^2 v^2}{\rho_m L_m^2 \left(v \sqrt{\frac{L_m}{L}} \right)^2} \\ &= \frac{\rho L^3}{\rho_m L_m^3} \end{aligned}$$

If the same fluid be used, $\rho = \rho_m$,

$$\text{hence, } \frac{R_w}{r_w} = \left(\frac{L}{L_m} \right)^3$$

Substituting from Equations (1) and (2),

$$\frac{R - R_f}{R_m - r_f} = \left(\frac{L}{L_m} \right)^3$$

From which the total resistance of the ship is obtained.

EXAMPLE 1.

The resistance of a hydroplane may be assumed to be entirely due to wave formation. The speed of the hydroplane is to be 90 ft. per sec.; calculate its resistance at this speed if the resistance of a model at the corresponding speed was found to be .5 lb. The linear dimensions of the model were $\frac{1}{25}$ of the hydroplane. What is the speed of the model?

As wave resistance is a gravity resistance,

$$\begin{aligned} \text{corresponding speed of model} &= 90 \sqrt{\frac{L_m}{L}} \\ &= 90 \times \sqrt{\frac{1}{25}} \\ &= 20.01 \text{ ft. per sec.} \end{aligned}$$

$$\text{Then,} \quad \frac{R}{R_m} = \left(\frac{L}{L_m} \right)^3$$

$$\begin{aligned} \text{Hence,} \quad R &= 20^3 \times .5 \\ &= 4000 \text{ lb.} \end{aligned}$$

EXAMPLE 2.

The loss of head in a pipe 1 in. diameter and 100 ft. long through which water is flowing at 10 ft. per sec. was found to be 7 ft. of water. Calculate the loss of head in a 3 in. pipe 60 ft. long through which air is flowing at the corresponding speed. For water, $\rho = 62.4$ lb. per cu. ft. and $\mu = .01$ C.G.S. units. For air, $\rho = .075$ lb. per cu. ft. and $\mu = .00015$ C.G.S. units.

As this is a viscous resistance, corresponding speed will be when

$$\frac{\mu}{\rho d v} \text{ for water} = \frac{\mu}{\rho d v} \text{ for air}$$

$$\text{That is,} \quad \frac{.01}{62.4 \times 1 \times 10} = \frac{.00015}{.075 \times 3 \times v}$$

$$\begin{aligned} \text{from which,} \quad v &= \frac{62.4 \times 1 \times 10 \times .00015}{.075 \times 3 \times .01} \\ &= 416 \text{ ft. per sec.} \end{aligned}$$

$$\begin{aligned}\text{Now, resistance to flow} = R &= \rho L^2 v^2 \phi \left(\frac{\mu}{\rho v d} \right) \\ &= \rho \times \text{wetted area} \times v^2 \phi \left(\frac{\mu}{\rho v d} \right)\end{aligned}$$

$$\text{Hence, } R \text{ for water} = (\rho \times \pi d l v^2 \text{ for water})$$

as the term $\phi \left(\frac{\mu}{\rho v d} \right)$ will cancel at the corresponding speed

$$\begin{aligned}\text{But, } R &= \text{pressure} \times \text{cross-sectional area} \\ &= \rho h \times \frac{\pi}{4} d^2 \quad \dots \dots \dots (2)\end{aligned}$$

$$\text{as } p = \rho h$$

Hence, equating Equations (1) and (2),

$$\frac{(\rho h \times \frac{\pi}{4} d^2) \text{ for air}}{(\rho h \times \frac{\pi}{4} d^2) \text{ for water}} = \frac{(\rho \times \pi d l v^2) \text{ for air}}{(\rho \times \pi d l v^2) \text{ for water}}$$

$$\text{Hence, } \frac{h \text{ for air}}{h \text{ for water}} = \frac{\frac{1}{d}(l v^2) \text{ for air}}{\frac{1}{d}(l v^2) \text{ for water}}$$

$$\text{That is, } \frac{h \text{ for air}}{7} = \frac{60 \times 416^2 \times 1}{3 \times 100 \times 10}$$

$$\begin{aligned}\text{Hence, loss of head for air} &= 24,200 \text{ ft. of air} \\ &= \frac{24,200 \times 0.075}{62.4} \\ &= 29.1 \text{ ft. of water.}\end{aligned}$$

It is not necessary in a question of this type to bring all terms to foot lb. units, as the factors required to do this would cancel.

EXAMPLES 13.

(1) Find the kinematic viscosity of water at a temperature of 60° C.

Ans.— 5.05×10^{-6} sq. ft. per sec.

(2) Oil of kinematic viscosity .000052 sq. ft. per sec. flows through a pipe of 6 in. diameter with a velocity of 1 ft. per sec. Find the value of the term $\frac{v d}{\nu}$ and state whether the flow is stream line or turbulent.

Ans.—9,600 ; turbulent.

(3) Air of kinematic viscosity of 15.6×10^{-5} sq. ft. per sec. flows through a pipe of 2 in. diameter. What is the maximum velocity for stream line flow ?

Ans.—1.872 ft. per sec

(4) Water at 20° C. flows through a pipe of 9 in. diameter and of length 2,000 ft. with a velocity of 1.2 ft. per sec. Find the loss of head due to viscosity. *Ans.*—1.13 ft.

(5) Water at a temperature of 20° C. leaks through a horizontal slot .01 in. deep, 4 in. in breadth, and 6 in. in length. Find the quantity of water leaking through per hour when the difference of pressure between the ends of the slot is 5 lb. per sq. in. *Ans.*—1.48 cu. ft. per hour

(6) Fuel oil at a temperature of 10° C. is pumped through a pipe line of 6 in. diameter and 5,000 ft. in length. Find the horse-power required to pump 10 tons per hour of this oil if the weight of the oil is 57 lb. per cu. ft. and the kinematic viscosity at 10° C. is .00015 sq. ft. per sec. *Ans.*—0.189 h.p.

(7) The resistance of geometrically similar plates when towed edgewise through a fluid are given by $R = \rho l^2 v^2 \phi \left(\frac{\rho l v}{\mu} \right)$ in which ρ is the fluid density and μ the coefficient of viscosity of the fluid, l the linear dimensions, and v the velocity. Determine the torque necessary to rotate a thin disc 24 in. diameter at 3,000 revs. per min. in air for which $\rho = 1.2 \times 10^{-3}$ and $\mu = 1.86 \times 10^{-4}$ C.G.S. units, given that the torque necessary to rotate a similar disc 9 in. diameter in water at the corresponding speed is .079 ft. lb. For water $\rho = 1.00$, and $\mu = .0101$ C.G.S. units. (London Univ., 1925.) *Ans.*—1.6 lb. ft.

(8) Show that the resistance to motion of a body deeply submerged in a fluid is given by $R = \rho l^2 v^2 \phi \left(\frac{vl}{\nu} \right)$ where l is some one specified dimension of the body and where ρ and ν are respectively the density and kinematic viscosity of the fluid. (London Univ., 1926.)

(9) How does the viscous leakage past a long hydraulic plunger having a very small radial clearance depend upon (1) the length of the plunger surrounded by its bush, (2) the radial clearance, (3) the diameter, (4) the difference of pressure? (London Univ., 1924.)

(10) What is meant by "corresponding speeds" in model experiments? Deduce the law of corresponding speeds (a) for viscous resistance, (b) for resistances due to the effects of gravity. In the case of a hydroplane the resistance is mainly due to wave formation. If the scale of a model hydroplane is $\frac{1}{25}$ and if its resistance at a speed of 20 ft. per sec. is 0.4 lb., what will be the resistance of the large hydroplane at the corresponding speed? (London Univ., 1926.) *Ans.*—6,250 lb.

(11) The resistances to the uniform flow of fluids through similar pipes is given by $\frac{p}{l} = \frac{\rho v^2}{d} \phi \left(\frac{\mu}{\rho d v} \right)$, in which $\frac{p}{l}$ is the pressure drop per unit length, and d is the diameter of the pipe, ρ is the density, μ the viscosity, and v the velocity of the fluid.

Hence, find the pressure drop, expressed in inches of water, in a pipe 8 in. diameter, 1,000 ft. long, in which air is flowing at a velocity of 6.21 ft. per sec., given that the loss of head is 6.1 ft. when water flows through a similar pipe 1 in. diameter 100 ft. long, at the corresponding speed. For water $\rho = 62.4$ lb. per cu. ft., and $\mu = 1.01 \times 10^{-2}$ C.G.S. units; for air $\rho = .0751$ lb. per cu. ft., and $\mu = 1.86 \times 10^{-4}$ C.G.S. units. (London Univ., 1926.) *Ans.*—4.05 in.

CHAPTER XIII

HYDRAULIC MACHINES, METERS, AND VALVES

128. **The Hydraulic Accumulator.** The hydraulic accumulator is a cylinder used for temporary storing the energy of water.

Hydraulic machines such as lifts or cranes are required to do a large amount of work during a small interval of time,

which is followed by an idle period. For example, a lift or crane requires the energy to be supplied during the upward motion of the load only, practically no energy being used during the downward motion. But as the pumps are supplying the energy continuously, it may be stored in an accumulator during the idle periods of the machine and given out at an increased rate during the working periods. The uniform supply of energy from the pumps need not,

therefore, be as large as that required by the machine when doing its maximum rate of work, as the machine will then draw from the accumulator.

The accumulator consists of a vertical cylinder containing a sliding ram (Fig. 145). A container, fixed to the ram, is filled with heavy material such as slag, or the ram is loaded with weights. Water is delivered by the pumps into the cylinder when not required by the machine it is working. The pressure of the water lifts up the heavy ram until the cylinder is full. The accumulator has then stored its maximum amount

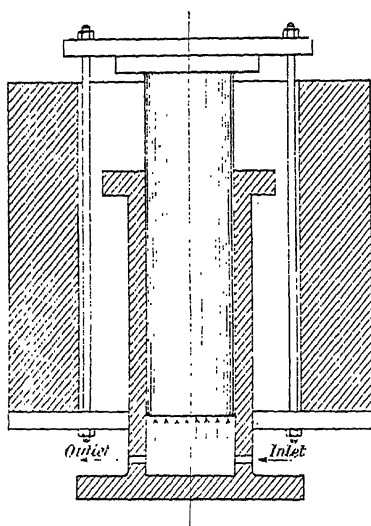


FIG. 145

of energy. During its period of maximum work, the machine will draw from the accumulator and the ram will descend.

The maximum amount of energy the accumulator can store is known as the capacity of the accumulator.

Let A = area of base of ram in square feet,
and H = lift of ram in feet.

Then, volume of accumulator = AH cu. ft.

Let p = intensity of pressure of water supplied in pounds per square feet.

Then, weight of ram = pA lb.

Work done in lifting ram = pAH ft. lb.

This equals the energy stored, which is the capacity of the accumulator.

Therefore,
capacity of accumulator
= pAH
= $p \times \text{volume}$


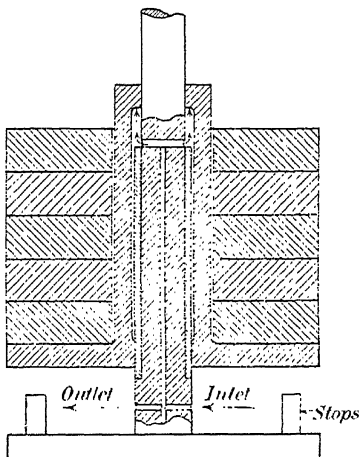


FIG. 146

Another form of accumulator, known as Tweddell's differential accumulator, is shown in Fig. 146. The advantage of this accumulator is that the water can be stored at a high pressure by a comparatively small load on the ram. It consists of a fixed ram of which the lower portion is made larger than the upper portion by surrounding it with a brass bush. Sliding on the fixed ram is a loaded cylinder, which is forced upwards by the pressure of the water from the main supply. The water enters and leaves the cylinder by a hole through the centre of the fixed ram.

Let a = sectional area of brass bush in square feet
= effective area of ram

Load on cylinder = pa .

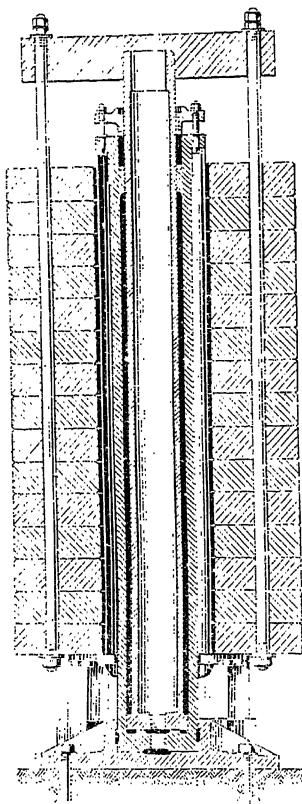

(Hydraulic Engineering Co.)
FIG. 147.—SECTION OF HYDRAULIC
ACCUMULATOR
Cast-iron weight type

Therefore, by making the area of the bush small, it is possible to store at a high pressure with a small load.

$$\begin{aligned}\text{Capacity of accumulator} \\ &= paH \\ &= p \times \text{volume}\end{aligned}$$

A sectional view of an actual accumulator* is shown in Fig. 147.

If the pipes leading to an accumulator are very long great trouble is experienced owing to surging, which is caused by the inertia effect of the water column. This can be overcome by fitting some form of relief valve (Art. 136) as close to the accumulator as possible.

EXAMPLE 1.

An accumulator has a ram of 6 in. diameter and a lift of 18 ft. Water is supplied at a pressure of 800 lb. per square inch. Find the necessary load on the ram and the capacity in horse-power hours.

$$\begin{aligned}\text{Load on ram} &= p \times a \\ &= 800 \times \frac{\pi}{4} \cdot (6)^2 \\ &= 22,600 \text{ lb.}\end{aligned}$$

$$\begin{aligned}\text{Capacity} &= paH \\ &= 22,600 \times 18 = 407,000 \text{ ft. lb.} \\ &= \frac{407,000}{33,000 \times 60} = .206 \text{ h.p. hours}\end{aligned}$$

* By courtesy of The Hydraulic Engineering Co., Chester.

EXAMPLE 2.

An accumulator has a 12-in. ram and 15 ft. lift, and is loaded with 80 tons total weight. If packing friction is equivalent to 5 per cent of the load on the ram, determine the horse-power being delivered to the mains if the ram falls steadily through its full range in 1.5 minutes, and if at the same time the pumps are delivering 1 cu. ft. per sec. through the accumulator. (A.M. Inst. C.E., 1926.)

First find the pressure of water required to lift ram of accumulator; this will be the pressure of water supplied by pumps.

Intensity of pressure when ram is rising

$$\begin{aligned} & \text{Weight} \times \frac{105}{100} \\ & \text{area} \\ & \frac{80 \times 2240 \times 1.05}{\frac{\pi}{4}} \text{ lb. per sq. ft.} \end{aligned}$$

Head of water due to this pressure,

$$\begin{aligned} & = \frac{80 \times 2240 \times 1.05}{\frac{\pi}{4} \times 62.4} \\ & = 3840 \text{ ft. of water} \end{aligned}$$

Work supplied by pumps per min.,

$$\begin{aligned} & = WH \\ & = (62.4 \times 60) \times 3840 \\ & = 14,330,000 \text{ ft. lb.} \end{aligned}$$

Work done by accumulator per min.,

$$\begin{aligned} & \text{Weight} \times \text{distance moved} \\ & = (80 \times 2240 \times .95) \times 10 \\ & = 1,703,000 \text{ ft. lb.} \end{aligned}$$

Horse-power delivered

$$\frac{14,330,000 + 1,703,000}{33,000}$$

$$= 487$$

129. **The Hydraulic Intensifier.** The hydraulic intensifier is used for increasing the intensity of pressure of water by

means of the energy of a larger quantity of water at low pressure. This is necessary when the pressure of the water supplied to a machine is not of sufficient intensity.

An intensifier consists of a fixed ram (Fig. 148) through which the high pressure water flows to the machine. Mounted externally on the fixed ram is a hollow sliding ram containing the high pressure water. The sliding ram is encased by a fixed cylinder which contains the low pressure water from the main supply. The low pressure water presses on the end of the sliding ram, forcing it downwards on to the fixed ram; this increases the pressure of the water in the sliding ram.

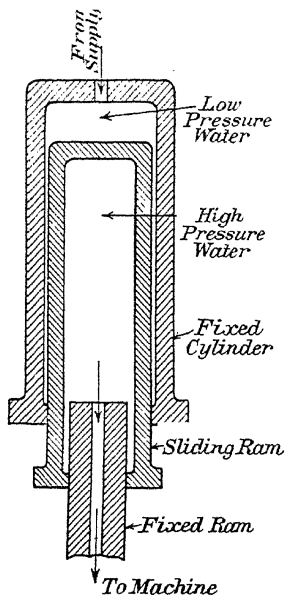


FIG. 148

Let A = external area of end of sliding ram

a = area of end of fixed ram

P = intensity of pressure of low pressure water in fixed cylinder

p = intensity of pressure of high pressure water in sliding ram

As total upward force = total downward force

$$pa = PA$$

From which,
$$p = \frac{PA}{a}$$

When the sliding ram is at the bottom of its stroke the valve admitting the high-pressure water to the machine is closed. Low pressure water from the main is then admitted to the inside of sliding ram and the fixed cylinder is open to exhaust; this causes the sliding ram to rise. When it reaches the top of its stroke the valve admitting high pressure water to machine

is opened and the valve admitting low pressure water to inside of sliding cylinder is closed. At the same time the fixed cylinder valve closes to exhaust and opens to the main. Low pressure water then flows into the fixed cylinder and forces the sliding cylinder downwards; this produces the high pressure water in the sliding cylinder which is forced into the machine. The intensifier is thus single acting, supplying high pressure water during the downward stroke only. Double acting intensifiers are made which give a continuous supply of high pressure water.

It is possible to raise the pressure of water to 10 tons per sq. in. by means of an intensifier.

The view of an actual intensifier is shown in Fig. 149.


EXAMPLE.

Water is supplied to an hydraulic intensifier at a pressure of 24 lb. per square inch. The diameters of the sliding and fixed rams of the intensifier are 2 in. and 5 in. respectively. Find the pressure of the water leaving the intensifier.

$$p = \frac{PA}{a} = 24 \times \frac{5^2}{2^2}$$

$$= 150 \text{ lb. per sq. in.}$$

130. Water Meters. (a) **THE KENT VENTURI METER.** This consists of the ordinary Venturi meter, which has already been dealt with in Art. 23, on to which is attached a special apparatus for indicating the flow of water. The quantity of

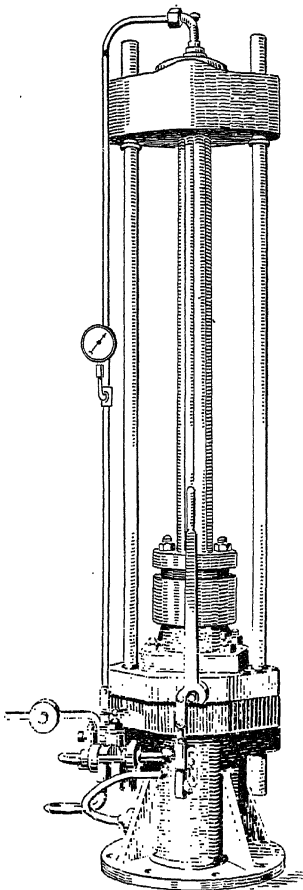

(Hydraulic Engineering Co.)

FIG. 149.—HYDRAULIC INTENSIFIER

water flowing through the meter is proportional to the square root of the difference of pressure heads at the entrance and throat. The flow is plotted by a pencil on to a drum which is revolved by clockwork, whilst the total flow through the meter is recorded by the small dials shown in Fig. 150.

The instrument, shown in Fig. 150, consists of two cast-iron cylinders, M_1 and M_2 , containing mercury on which rests two floats, F_1 and F_2 . These cast-iron cylinders form the two limbs of a U-tube and are connected at their bases by the tube m . The water pressure at the entrance and throat of the Venturi meter is transmitted to the cylinders through the pipes P_1 and P_2 . The floats are connected to racks D_1 and D_2 , which turn the pinions H_1 and H_2 as the floats rise or fall with the pressure difference in the Venturi meter. These pinions transmit the motion to two other racks, J_1 and J_2 , which are outside of the cylinders. The rack J_1 operates the pencil G , which plots the pressure difference on the squared paper surrounding the drum D . The latter is rotated by clockwork governed by the pendulum P . The squared paper used on the drum is so divided that the flow may be read direct. As the vertical displacement of the pencil is proportional to the pressure difference, the paper must be divided so as to read the square root of the pressure difference. It should be noted that the float F_1 will rise the same amount as F_2 falls, both displacements being in proportion to the pressure difference of the Venturi meter.

The right-hand external rack J_2 operates the recording dials to register the flow. The vertical displacement of the rack is proportional to the pressure difference; this must be reduced to the square root of the pressure difference in order to register the flow. Inside of the clockwork drum D , and rotating with it, is an integrating drum, the development of which is shown in Fig. 151. The drum is divided by a parabolic curve ABC . The shaded surface above the curve is raised above the surface below. The rack J_2 is connected to a carriage which is in contact with the drum and which gears with the recording dials. When the raised surface of the drum comes in contact with the carriage the latter is put out of gear with the recorder and no flow is registered. Thus, if the carriage is at a height D , the flow will only be registered over the portion of a revolution represented by DB ; it will be out of gear during the portion BE . When the float is at the top of the cylinder there will

be no flow taking place; the carriage will then be on the raised surface above *A* (Fig. 151) during the revolution of the drum, and no flow will be registered by the recorder.

(b) **THE DEACON METER.** This meter is shown in Fig. 152. It consists of a cast-iron body *C*, into which is fitted a hollow cone *A*. The water flows into the meter through *E*, passes through the cone and leaves the meter through *F*. A disc *D*, having a diameter equal to the smallest diameter of the cone, is fixed to the rod *G*, which slides up and down in the boss *B*. A balance weight *Q* is attached to a wire *W* fixed to the top of the rod *G*, and keeps the disc *D* at the top of the cone when no water is flowing. When the water flows into the meter it forces down the disc *D* into a wider part of the cone and passes

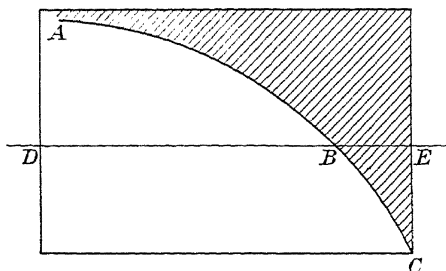


FIG. 151

through the space between *D* and the cone sides. This space increases as *D* descends; the vertical drop of *D* will, therefore, be in proportion to the quantity of water flowing.

The flow through the meter is recorded by means of a pencil connected to the wire from the rod *G*. The pencil is in contact with the surface of the drum *R*, which is revolved by clock-work. As the vertical motion of the pencil is proportional to the movement of the disc *D*, a curve giving the quantity of flow through the meter at any instant will be automatically drawn on suitably graduated squared paper placed around the revolving drum.

This meter is chiefly used for measuring the waste water flow in water mains.

(c) **THE KENNEDY METER.** This is a positive type of meter, the volume of water flowing being actually measured by continually filling a cylinder of known volume.

be no flow taking place; the carriage will then be on the raised surface above *A* (Fig. 151) during the revolution of the drum, and no flow will be registered by the recorder.

(b) **THE DEACON METER.** This meter is shown in Fig. 152. It consists of a cast-iron body *C*, into which is fitted a hollow cone *A*. The water flows into the meter through *E*, passes through the cone and leaves the meter through *F*. A disc *D*, having a diameter equal to the smallest diameter of the cone, is fixed to the rod *G*, which slides up and down in the boss *B*. A balance weight *Q* is attached to a wire *W* fixed to the top of the rod *G*, and keeps the disc *D* at the top of the cone when no water is flowing. When the water flows into the meter it forces down the disc *D* into a wider part of the cone and passes

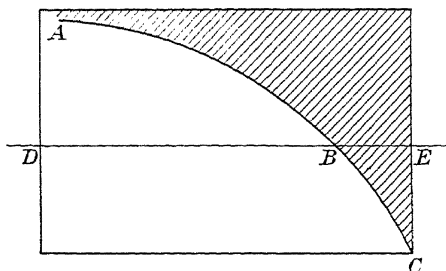


FIG. 151

through the space between *D* and the cone sides. This space increases as *D* descends; the vertical drop of *D* will, therefore, be in proportion to the quantity of water flowing.

The flow through the meter is recorded by means of a pencil connected to the wire from the rod *G*. The pencil is in contact with the surface of the drum *R*, which is revolved by clock-work. As the vertical motion of the pencil is proportional to the movement of the disc *D*, a curve giving the quantity of flow through the meter at any instant will be automatically drawn on suitably graduated squared paper placed around the revolving drum.

This meter is chiefly used for measuring the waste water flow in water mains.

(c) **THE KENNEDY METER.** This is a positive type of meter, the volume of water flowing being actually measured by continually filling a cylinder of known volume.

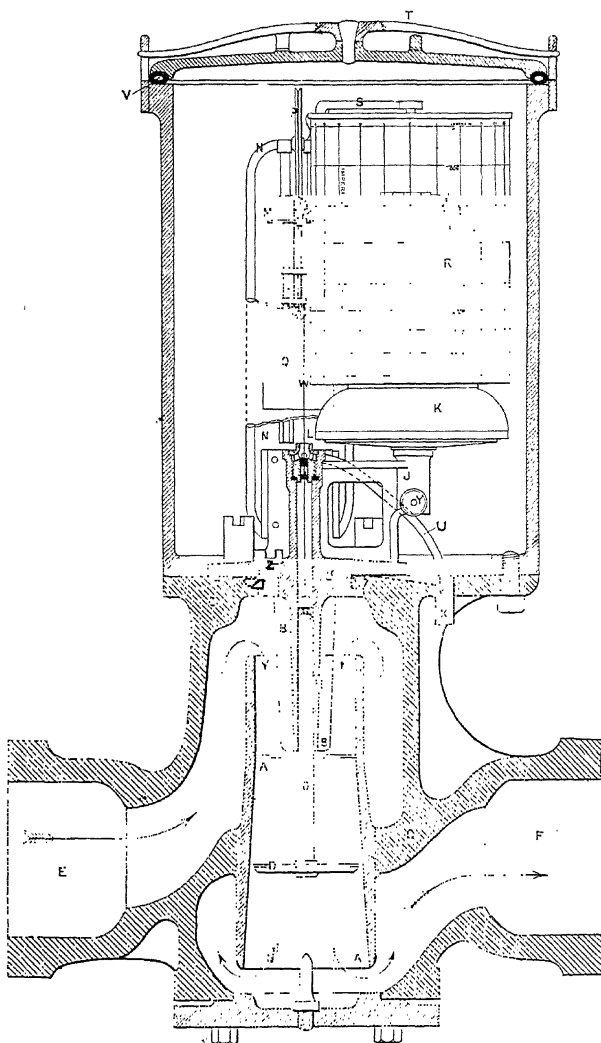


FIG. 152.—DIFFERENTIATING WASTE WATER METER.

The meter consists of a cylinder (Fig. 153), in which slides a piston. The piston rod is connected to a rack, which slides up and down with the piston. The rack gears with a pinion, which operates a four-way cock. A diagrammatic view of the passages is shown in Fig. 154. The water

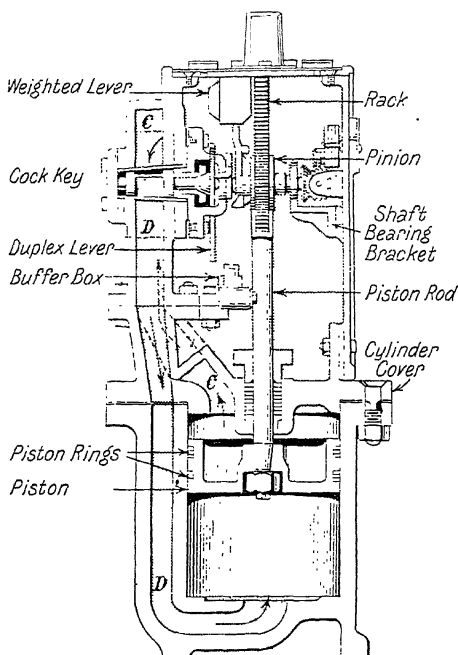


FIG. 153.—THE KENNEDY METER

from the supply pipe flows through *A* into the pipe *D*, through which it enters the lower end of the cylinder and forces up the piston. As the piston rises, the rack turns the pinion. A weight is fixed to the end of a lever which is rotated upwards by a pin fixed to the pinion. When the piston reaches the top of its stroke, the weight is rotated to just beyond the vertical position; it then falls over suddenly and, by striking a lever, operates the cock into its reverse position. This

new position of the cock cuts off the water supply from the lower end of the cylinder and admits it to the upper end. At the same time, the lower end is open to the outlet pipe *B* of the meter. The piston now moves downwards under the pressure of the incoming water, and forces the water in the

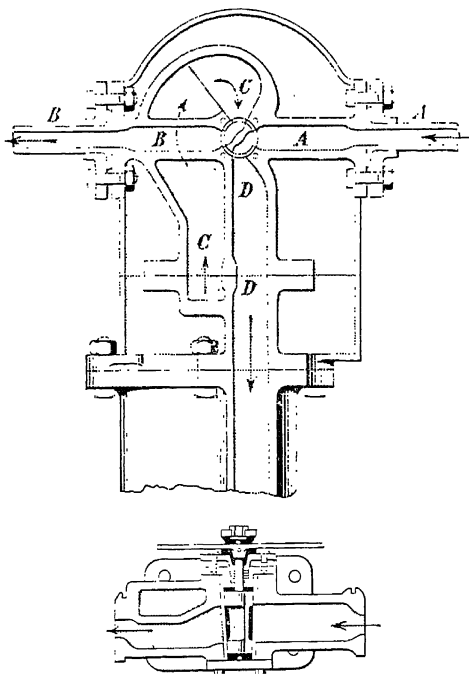


FIG. 154.—KENNEDY METER—SECTION THROUGH PORTS

lower end of the cylinder up the pipe *D* into the outlet pipe. In moving downwards, the rack operates the pinion, which causes the weight to be again raised. When the piston reaches the bottom of its stroke, the weight falls over and turns the cock back to its former position. The upper part of the cylinder is now open to the outlet pipe and the lower part to the supply pipe. The piston will now be forced upwards, driving the water above it through the pipe *C* and into the outlet pipe. The cycle is then repeated.

For each stroke of the piston, a volume of water equal to the volume of the cylinder passes through the meter. The strokes are registered by means of a counter, operated by the pinion, which records the quantity of flow.

131. The Hydraulic Ram. The hydraulic ram is an automatic pump by means of which a large quantity of water falling through a small height is utilized in lifting a small quantity of water to a greater height.

A diagrammatic view of a hydraulic ram is shown in Fig. 155. Water from the natural supply A has an available head of H_1 ;

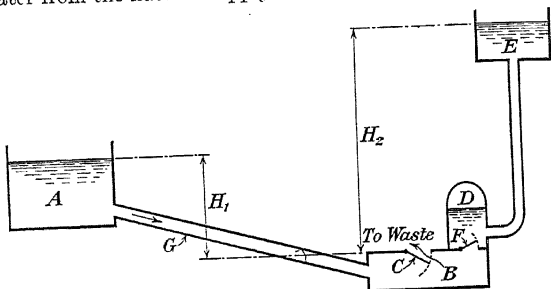


FIG. 155

by means of the ram a small quantity of this water is raised through the height H_2 into the service tank E .

Let W = weight of water flowing per second from A

w = weight of water raised per second to E

Then, as energy supplied by A is theoretically equal to energy supplied to E ,

$$WH_1 = wH_2$$

$$\text{Or, } w = \frac{WH_1}{H_2}$$

If losses are taken into account,

$$\text{efficiency of ram} = \frac{wH_2}{WH_1}$$

The automatic action of the ram is due to the inertia forces of the water in the pipe G . The water commences to flow down the pipe G into the chamber B . The waste water valve C is open and the water flows through it to waste. As

the speed of the water in *G* increases, the dynamic pressure on the valve *C* increases, until it will ultimately be greater than the weight of the valve lid ; the valve will then suddenly close. The closing of the valve *C* brings the water in *G* suddenly to rest, causing an increase of pressure in *B*. This increase of pressure lifts the valve *F* and some of the water will flow into the air vessel *D*, compressing the air in the vessel. This

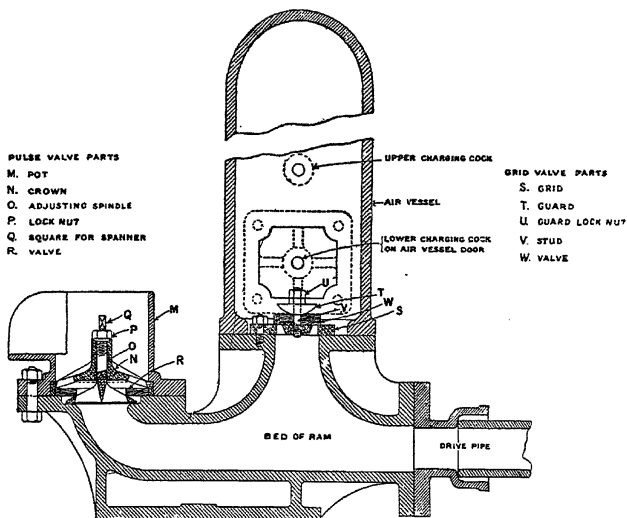


FIG. 156.—HYDRAULIC RAM

The air vessel is drilled so that the delivery may be on either side

increased air pressure forces the water into the tank *E*. When the momentum of the water in *B* is destroyed, the valve *F* closes and the valve *C* opens, causing the flow from *A* to recommence ; the cycle is then repeated. The automatic valves *C* and *F* may act by their weight or by a spring.

Hydraulic rams are chiefly used on country estates and farms at which a large quantity of water under a low head is available.

The cross-sectional view of an actual hydraulic ram* is shown in Fig. 156, and a plan and elevation of the complete installation is shown in Fig. 157.

* By courtesy of Messrs. Green & Carter, Ltd., Winchester.

The overall efficiency of the hydraulic ram is as large as 80 per cent, and water can be lifted to a height of fifty times the height of the working fall. Compound hydraulic rams are made which will raise water to any height to which it could be forced by an ordinary pump.

132. The Hydraulic Press. Hydraulic presses are used in most branches of industry ; in principle they are the same as the Bramah press which was dealt with in Art. 4. They vary greatly in type according to the nature of the work required, but all consists of a ram sliding in a cylinder into which high pressure water is forced. In some large forging presses water

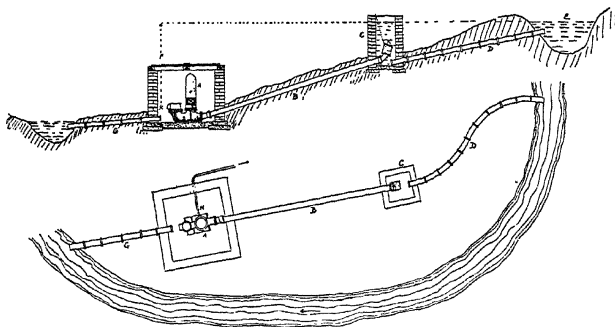



FIG. 157

at a pressure of 5 tons per sq. in. is used in the cylinder and produces a total force of 5,000 tons.

In all heavy presses some means must be adopted to bring about the return stroke of the ram. To do this, small return rams are fitted, their function being to bring the main ram back to the beginning of its stroke. The size of the return ram must be such that the area multiplied by water pressure is sufficient to lift the main ram. In designing the main ram, the area multiplied by water pressure should be large enough to do the work of the press and to overcome the resistance of the return rams.

For balancing purposes it is necessary to have two return rams to one main ram. An alternative method is to have one return ram in tandem with the main ram.

A view of a shell forging press is shown in Fig. 158 ; in this

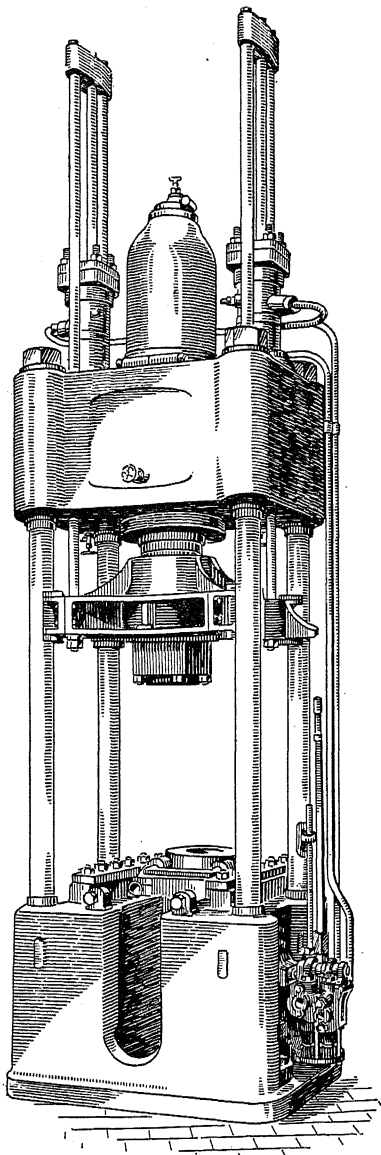

(Hydraulic Engineering Co.)

FIG. 158.—SHELL FORGING PRESS

view the two return rams can be seen at the sides of the main ram.

EXAMPLE.

The ram of a hydraulic press is 8 in. diameter, and is worked from an intensifier of the piston and ram type which receives its low-pressure supply of water from a tank whose surface level is 50 ft. above the level of the intensifier piston, through a pipe 2 in. diameter and 400 ft. long. The intensifier ram is 3 in. diameter and the piston 36 in. diameter. The friction of each of the three packings may be taken to be 3 per cent of the total pressure on the appropriate piston or ram. The frictional coefficient for the low pressure supply pipe is 0.005. Calculate the speed of advance of the press ram in inches per minute when exerting a force of 50 tons. Neglect all other losses. (London Univ., 1924.)

$$\text{Water pressure on ram of press} = 50 \times \frac{100}{97} = 51.5 \text{ tons}$$

$$\begin{aligned} \text{Intensity of pressure on ram of press} \\ = \frac{51.5}{\frac{\pi}{4} 8^2} = 1.025 \text{ tons per sq. in.} \end{aligned}$$

As this is the same pressure transmitted by the ram of the intensifier, intensity of pressure on intensifier ram

$$= 1.025 \times \frac{100}{97} \text{ tons per sq. in.}$$

As load on intensifier ram equals load on intensifier sliding cylinder,

$$1.025 \times \frac{100}{97} \times \frac{\pi}{4} \times 3^2 = p \times \frac{\pi}{4} \times 36^2 \times \frac{97}{100}$$

where p = pressure of low pressure water supply

$$\begin{aligned} \text{Hence, } p &= 1.025 \times \left(\frac{100}{97}\right)^2 \times \left(\frac{36}{3}\right)^2 \times 2240 \\ &= 16.96 \text{ lb. per sq. in.} \end{aligned}$$

Hence, pressure head of low pressure water

$$= \frac{16.96 \times 144}{62.4} = 39.2 \text{ ft.}$$

$$\text{Therefore, head lost in } \left. \begin{array}{l} \text{friction in 2-in. pipe} \end{array} \right\} = 50 - 39.2 = 10.8 \text{ ft.}$$

Let v = velocity of water in 2-in. pipe in ft. per sec.

V = velocity of ram in ft. per sec.

$$\left. \begin{array}{l} \text{Head lost in friction} \\ \text{in 2-in. pipe.} \end{array} \right\} = 10.8 = \frac{4flv^2}{2gd} = \frac{4 \times .005 \times 400 v^2 \times 12}{2 \times 32.2 \times 2}$$

From which, $v = 3.8$ ft. per sec.


As quantity of water flowing along 2-in. pipe per sec. equals the quantity flowing in the press cylinder per sec.,

$$v \times \left(\frac{\pi}{4} \times \frac{2^2}{144} \right) = V \times \left(\frac{\pi}{4} \times \frac{8^2}{144} \right)$$

From which, $V = 3.8 \times \left(\frac{2}{8} \right)^2$ ft. per sec.
 $= 14.25$ ft. per sec.

133. The Hydraulic Crane. The hydraulic crane is usually found at docks, sidings, and warehouses, and is used for lifting loads up to 250 tons. It consists of a central pedestal supporting a mast from which is suspended a jib, or arm, the latter can be raised or lowered in order to reduce or increase the radius of action. The mast revolves about a vertical axis, the jib swinging with it; thus, by revolving the pedestal and lowering the jib, the suspended load may be moved to any place within the crane's area of action. The principle of the suspended jib enables the load to be lifted over obstacles on the ground.

The load is suspended by a wire rope which passes over pulleys to a hydraulic ram; this ram has an arrangement of pulleys for increasing the velocity ratio and is known as a jigger. The jigger is attached to the mast and consists of a sliding ram and cylinder at the ends of which are pulleys (Fig. 159); it increases the velocity ratio of the ram and cable by acting on the principle of the multi-sheaved pulley blocks. One set of pulleys are fixed to the ram whilst the other set are fixed to the cylinder, the cable being wound over both sets of pulleys. High-pressure water is admitted into the cylinder, forcing out the ram; this increases the distance between the two sets of pulleys, thus winding in the cable. A six-sheaf pulley block system will give a velocity ratio of six to one; this means that the suspended load will move at six times the speed of the ram. A modern hydraulic crane may have a lifting speed of 250 ft. per minute.

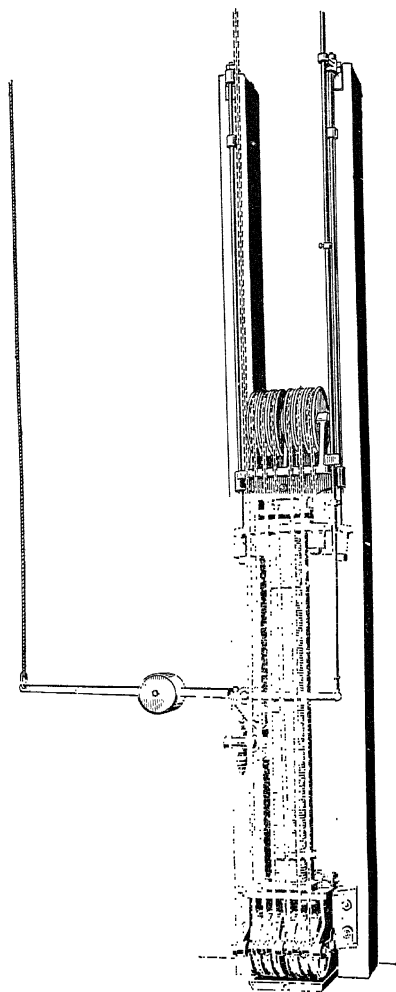

(Hydraulic Engineering Co.)

FIG. 159.—SINGLE POWER JIGGER

EXAMPLE.

The following particulars refer to a hydraulic crane—

Diameter of ram, 12 in.

Velocity ratio of crane hook to ram, 5 : 1.

Length of supply pipe from accumulator, 500 ft.

Diameter of supply pipe, 2 in.

Pressure at accumulator, 750 lb. per sq. in.

Mechanical friction of ram, pulleys, etc., equivalent to a pressure of 50 lb. per sq. in. on the ram.

Coefficient of friction for the pipe, 0.010.

Plot a curve showing the relation between the load lifted and the speed of lifting. (London Univ., 1923.)

Let W = load lifted in pounds

Then load on ram $= 5W$

Let v = velocity of water in 2-in. pipe

V = velocity of lifting in ft. per sec.

Then, velocity of ram $= \frac{V}{5}$

Intensity of pressure on ram $= \frac{5W}{\frac{\pi}{4} \times 1^2} + (50 \times 144)$ lb. per sq. ft.
 $= 6.36W + 7200$ lb. per sq. ft.

Head of water on ram $= \frac{p}{w} = \frac{6.36W + 7200}{62.4}$ ft. of water
 $= .1W + 115$ ft. of water

Head of water in accumulator $= \frac{750 \times 144}{62.4} = 1730$ ft. of water

Head lost in friction in pipe = Head in accumulator—head on ram
 $= 1730 - (.1W + 115)$
 $= 1615 - .1W$ ft. of water

Hence, $1615 - .1W = \frac{4flv^2}{2gd}$
 $= \frac{4 \times .01 \times 500v^2 \times 12}{62.4 \times 2}$

From which, $v = \sqrt{840 - .052W}$ ft. per sec.

As quantity of flow along pipe per second equals flow per second in ram cylinder,

$$v \times \frac{\pi}{4} \left(\frac{1}{8}\right)^2 = \frac{V}{5} \frac{\pi}{4} (1)^2$$

From which, $V = \frac{5}{36} v$

$$= \frac{5}{36} \sqrt{840 - .052 W}$$

$$= \sqrt{16.0 - .00104 W}$$

By substituting various values of W in this equation the corresponding values of V are obtained.

W	0	2,000	4,000	6,000	8,000	10,000	12,000	14,000
V	4.0	3.72	3.44	3.12	2.77	2.36	1.87	1.2

A curve may now be plotted with these results.

134. The Hydraulic Lift. The hydraulic lift obtains its motion from a jigger, in the same way as the crane (Art. 133). The jigger should be fixed with the ram working downwards, so that its weight will be supported by the cables; this prevents any tendency of the ram to move independently of the lift cage. The lift cage runs between guides of hard wood or round steel, and is usually suspended by four lifting ropes, each one being of sufficient strength to support the load. Sliding balance weights are provided to balance the weight of the cage.


Views of hydraulic suspended lifts are shown in Fig. 160.

Modern hydraulic lifts now have a lifting speed of 350 ft. per minute in this country; in the United States lifting speeds of 400 ft. per minute are in use.

The earlier form of hydraulic lift consisted of a sliding ram and cylinder; the platform or cage was supported on the end of the ram and pushed up by it. Hence, the stroke of the ram was the same as the lift of the platform. This type of lift is known as a direct acting lift.

EXAMPLE.

A hydraulic direct-acting lift has a ram 6 in. diameter. The pipe connecting the valve box to the cylinder is short and is $\frac{3}{4}$ in. diameter. The pressure in the valve box is 800 lb. per sq. in. Neglecting frictional losses

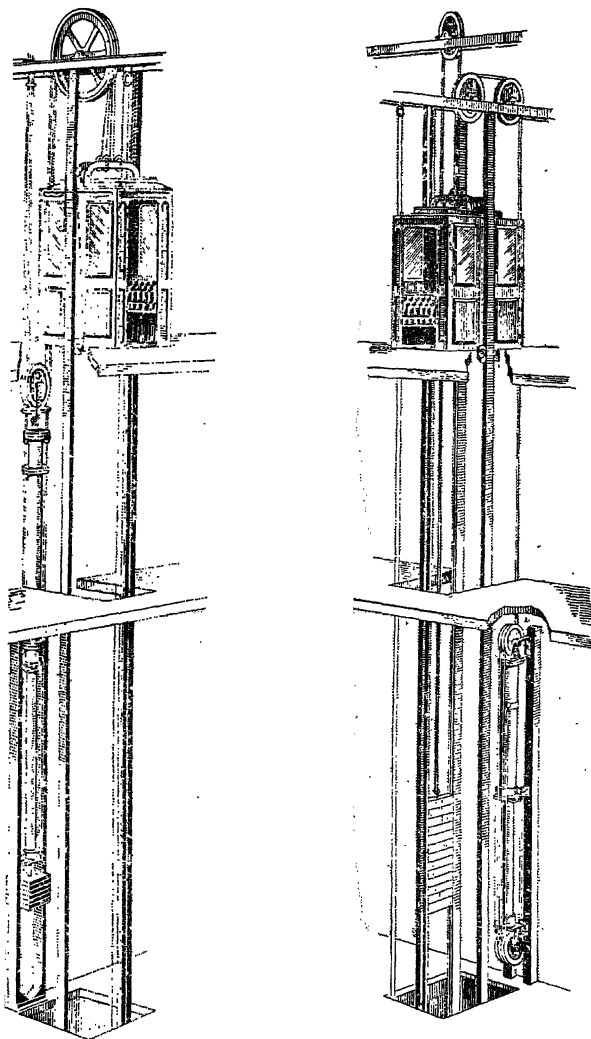

(Hydraulic Engineering Co.)

FIG. 160.—HYDRAULIC SUSPENDED LIFTS

and assuming the valve fully open, find the maximum load that can be lifted steadily at a velocity of 2 ft. per sec. Find also the maximum velocity with which the lift with this load could descend steadily with an open exhaust. (A.M.I. Mech. E., 1926.)

Let v = velocity of water in $\frac{3}{4}$ -in. pipe.

Then, as quantity per second flowing through pipe equals quantity per second flowing in cylinder,

$$v \times \frac{\pi}{4} \left(\frac{3}{4}\right)^2 = 2 \times \frac{\pi}{4} (6)^2$$

From which, $v = 128$ ft. per sec.

Velocity head of water in pipe $= \frac{v^2}{2g} = \frac{128^2}{64 \cdot 4} = 255$ ft. of water

Total intensity of pressure on ram = pressure in valve box
+ pressure due to velocity in pipe

$$= 800 + \frac{62 \cdot 4 \times 255}{144}$$

$$= 910 \cdot 5 \text{ lb. per sq. in.}$$

$$\text{Load on ram} = 910 \cdot 5 \times \frac{\pi}{4} (6)^2$$

$$= 25,700 \text{ lb.}$$

Let V = velocity of descent in feet per second.

$$\text{Then, velocity in } \frac{3}{4}\text{-in. pipe} = \left(\frac{6}{\frac{3}{4}}\right)^2 V = 64V$$





In descending, the ram will give a velocity head to water in the $\frac{3}{4}$ -in. pipe; this will be the only resistance. Hence,

pressure head due to ram = velocity head in $\frac{3}{4}$ -in pipe

$$\text{That is, } \frac{910 \cdot 5 \times 144}{62 \cdot 4} = \frac{(64V)^2}{2g}$$

From which, $V = 46$ ft. per sec.

135. The Hydraulic Capstan. Hydraulic capstans are used for winding a haulage rope and are found in railway goods yards and at docks. They consist of a vertical drum operated by a hydraulic engine. A cable is attached to the wagon or ship which is to be moved, the free end being wrapped round the capstan's drum; the capstan's engine is then started by pressing a lever with the foot; this causes the drum to rotate and wind up the haulage cable.

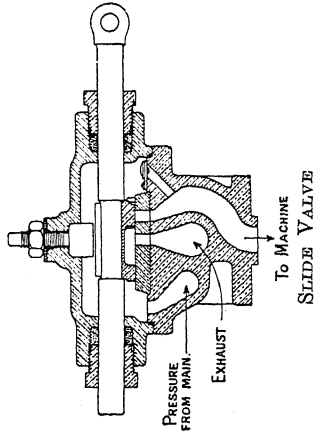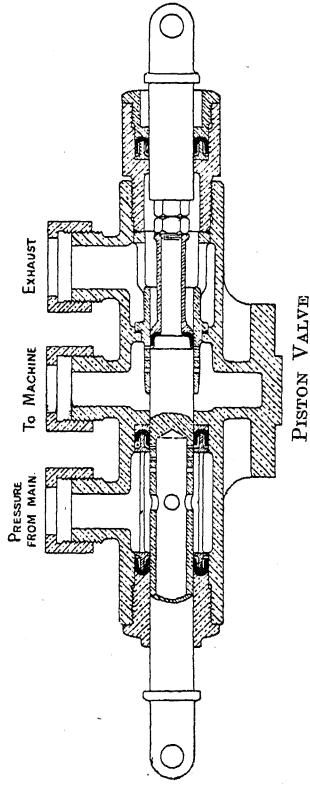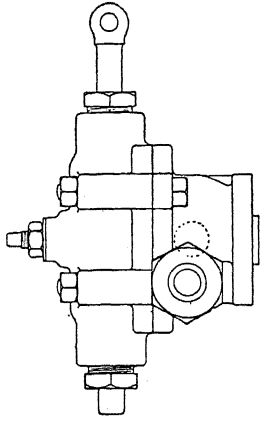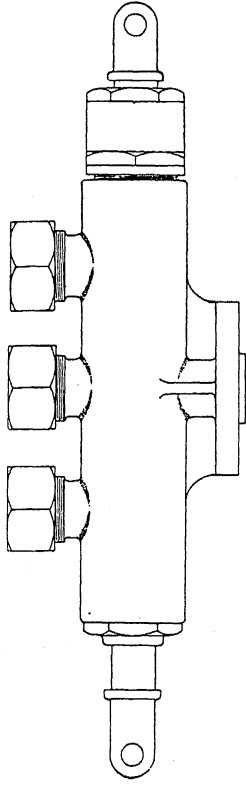

To MACHINE
SLIDE VALVE

(Hydraulic Engineering Co.)

FIG. 161.—WORKING VALVES

The hydraulic engine used for capstans is usually of the "Brotherton" type. This engine consists of three fixed radial cylinders at 120° , each containing a piston, with piston rods fixed to the same crank pin. The engine contains one working valve, with three parts, each connected to one of the cylinders. High pressure water is admitted to the head of the cylinder, forcing the piston along the cylinder for the working stroke. During the return stroke the exhaust port is opened and the used water flows out to waste.



The hauling drum is keyed on to the crank shaft, and is the only part of the machine above the ground. The engine is started by a foot treadle, thus leaving the hands free to manipulate the rope. The foot treadle operates a balanced mitre valve which admits water from the mains to the engine; when the foot is removed from the treadle the valve automatically closes.

136. Hydraulic Valves. (a) **SLIDE VALVES.** These valves are for operating hydraulic machinery and consist of the "D" slide valve and the piston valve (Fig. 161); they are similar in action to the ordinary steam engine valves. For water pressures up to 1,000 lb. per sq. in. the "D" slide valve may be used; but for very high pressures, as in lifts and cranes, the piston valve must be used.

As the valves slide to and fro they uncover or cover the various ports, thus admitting or cutting off the water supply to the machine or to exhaust. The operation of the valve can be clearly seen from Fig. 161.

(b) **MITRE VALVE.** This valve is used on cranes required to lift and lower rapidly; it consists of vertical spindle valves with mitred ends working on seats to suit, and requires very little effort to operate. A view of this valve is shown in Fig. 162. The valve spindles are operated by levers.

(c) **STOP VALVES.** Stop valves are used for shutting off the main water supply. They are spindle valves and are lowered on to the seat by revolving the spindle in a screw thread, a hand wheel being fitted for this purpose. For small valves, an unbalanced valve may be used; but for large valves working under high pressure it would require too large an effort to close the valve by hand. To overcome this, a balanced stop valve is used. The balanced stop valve has the water admitted to both sides of the valve when open, thus relieving the valve spindle of the water pressure.

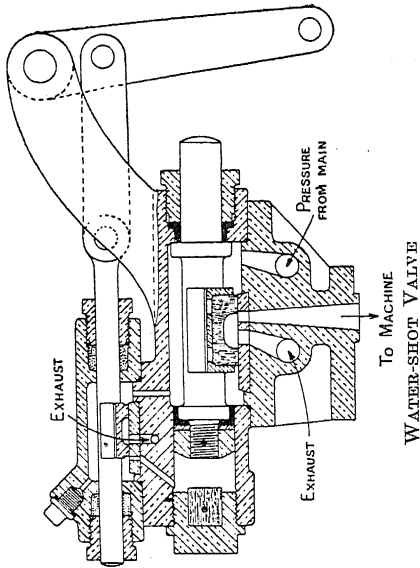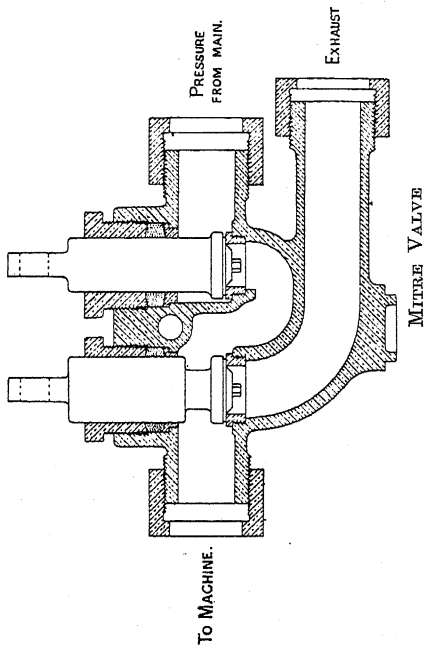

(Hydraulic Engineering Co.)

FIG. 162.—WORKING VALVES

Views of an unbalanced and a balanced stop valve are shown in Fig. 163.

(d) **RELIEF VALVES.** One form of relief valve is the safety valve which is arranged to open and reduce the pressure after a certain maximum pressure has been reached. These are fitted to accumulators and to machines with a rising ram of a predetermined stroke. If the ram should rise beyond its proper limit, owing to accidental causes, the pressure of water would become excessive and dangerous; the relief valve will then open and reduce the pressure. Its action, therefore, is the same as the steam safety valve on a boiler. The form of relief valve for this purpose is a lever and weight-loaded valve; a spring-loaded valve may also be used.


Another use of relief valve is to check the rise in pressure in a long pipe due to the sudden stopping of the flow; such valves are known as momentum valves. They consist of pistons working in a chamber against a spring. These valves are also fitted on machines which receive heavy shocks such as shell forging presses; when used for this purpose they are known as shock absorbers.

137. Hydraulic Joints and Packing. Hydraulic pipes of less than 2 in. diameter are usually of wrought iron with screw joints. The ends of each length of pipe are tapped and screwed into a coupling, the thread being first covered with hemp and white lead in order to prevent leakage.


Hydraulic pipes of more than 2 in. diameter are of cast iron with oval or circular flanges cast on the ends. These flanges are bolted together, a strip of packing being placed between them to prevent leakage. The packing consists of a thin sheet of rubber cut to the shape of the flange, or it may consist of one of the many patent hydraulic packing sheets which are on the market; copper rings are also used in place of sheet packing.

Hydraulic glands, pistons, etc., are packed with hemp or yarn soaked in tallow and well pressed into position. Also leather packing rings are used, the leather being first soaked in grease. These leather packing rings are named after the shape of their sections and are known as "U" leathers, "cup" leathers, and "hat" leathers, plain leather washers are also used.

The seams of wrought-iron tanks, ships, etc., are made watertight by "caulking"; the metal is caused to "flow"

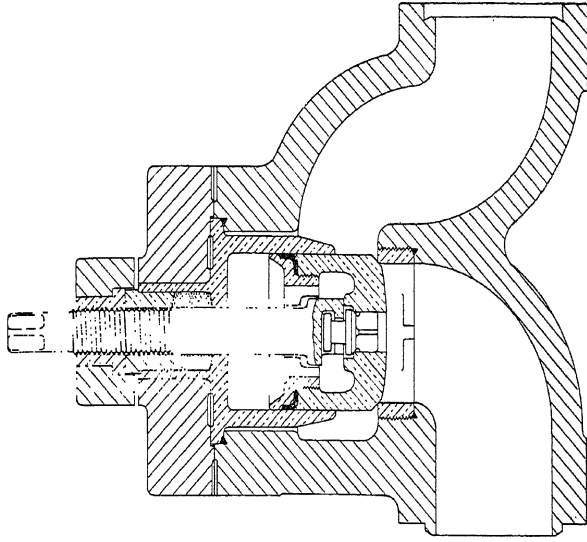

DOUBLE BALANCED STOP VALVE
(*Hydraulic Engineering Co.*)

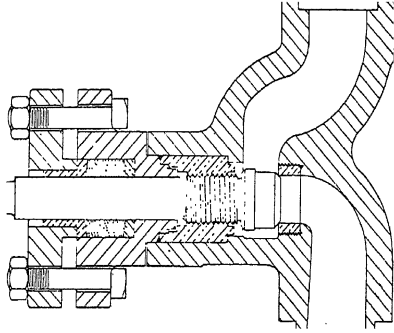

UNBALANCED STOP VALV.

FIG. 163.—STOP VALVES

over the seam by blows from a caulking tool. The seams of wood vessels and boats are made watertight by placing a layer of white lead between the planks.

EXAMPLES 13.

(1) A hydraulic accumulator has a ram of 9 in. diameter and a lift of 15 ft. Find the load on the ram and the capacity if supplied with water at 60 lb. per square inch pressure.

Ans.—3,810 lb. ; 57,200 ft. lb.

(2) A hydraulic intensifier has ram diameters of 3 in. and 7 in. Find the pressure at which the water is raised when the pressure of the supply is 75 lb. per square inch.

Ans.—408 lbs. per sq. in.

(3) A hydraulic lift has a ram diameter of 6 in. and is supplied with water at a pressure of 400 lb. per square inch. Find the total load the lift will carry if the efficiency is 85 per cent.

If the lift has a velocity of 2 ft. per second, find the horse-power required when lifting.

Ans.—9,600 lb. ; 41.2 h.p.

(4) 40 h.p. is to be transmitted from an accumulator through a 4 in. pipe, 5,000 ft. long. If the loss is to be 2 per cent, find the diameter of the ram which is loaded with 120 tons. (Assume coefficient of friction in pipe to be .01.) (London Univ., 1911.)

Ans.—19.9 in

(5) An accumulator maintains a pressure of 1,200 lb. per square inch in a 3 in. hydraulic main. A hydraulic lift is supplied with pressure water from this main, and the point at which the supply to the lift is drawn off is at a distance of 2,000 ft. from the accumulator. The ram at the lift is 8 in. in diameter, and the load on it, inclusive of its own weight, is 12 tons. The friction of the ram, cage, etc., may be taken as equivalent to an addition of $6\frac{1}{2}$ per cent of the gross load on the ram. Determine the speed at which the lift will ascend, if the value of the coefficient of resistance, f , for the hydraulic main is .008. Neglect the loss due to shock at entrance to cylinder. (London Univ., 1917.)

Ans.—2.69 ft. per second.

(6) Give a careful sketch showing the construction of a hydraulic ram, and explain its action fully by aid of reference letters. In what circumstances would you make use of such a machine and why ? (A.M.I. Civil E., 1922.)

(7) Describe with sketches the hydraulic ram, and explain its action. (London Univ., 1913.)

(8) An accumulator has a 12 in. ram and 20 ft. lift, is loaded with 100 tons total weight. If packing friction accounts for 2 per cent of the total force on the ram, determine the horse-power being delivered to the mains if the ram falls steadily through its full range in 2 minutes, and if at the same time the pumps are delivering 240 gallons per minute. (A.M.I. Mech. E., 1925.)

Ans.—406 h.p.

(9) A hydraulic lift raises a load of 8 tons through a height of 40 ft. once every 2 minutes, the speed of lifting being 2 ft. per second. It is worked from an accumulator which is being continuously charged by a pump. The pressure of the water is 500 lb. per square inch, the efficiency of the lift 75 per cent. and the efficiency of the pump 85 per cent. Find the power required to drive the pump, and the minimum capacity of the accumulator. Frictional losses in the pipes may be neglected. (London Univ., 1925.)

Ans.—H.P. = 17 ; volume = 11.08 cu. ft.

SUMMARY OF FORMULAE

1. Static Pressure of a Fluid—

PAGE

$p = wH$ 5

[illegible]

$$\bar{h} = \frac{\text{2nd moment}}{\text{1st moment}} = \frac{I_o}{A\bar{x}} \quad 16$$

2. Buoyancy of a Liquid—

$$GM = \frac{mx}{W \tan \theta} \quad . \quad . \quad . \quad . \quad . \quad . \quad 29$$

[illegible]

3. Flow of a Fluid—

[illegible]

$$H = \frac{v^2}{2g} 39$$

$$Z + \frac{p}{w} + \frac{v^2}{2g} = Z_1 + \frac{p_1}{w} + \frac{v_1^2}{2g} . \quad . \quad . \quad . \quad . \quad 43$$

For Venturi meter, $q = kc \sqrt{h}$ 45

where
$$c = \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \sqrt{2g} \quad . \quad . \quad . \quad 45$$

[illegible]

Centrifugal head = $\frac{v_2^2}{2g} - \frac{v_1^2}{2g}$ 54

4. Orifices and Mouthpieces—

$$\text{Discharge through small orifices} = C_d A \sqrt{2gh} \quad . \quad . \quad . \quad 72$$

$$,, \quad ,, \quad \text{large} \quad ,, \quad = \frac{2}{3} C_d \sqrt{2g} B (H_2^{\frac{3}{2}} - H_1^{\frac{3}{2}}) \quad . \quad . \quad 73$$

$$\left. \begin{array}{l} \text{Time of emptying tank} \\ \text{through orifice} \end{array} \right\} = \frac{2 A \sqrt{H}}{C_d a \sqrt{2g}} \quad \dots \dots \dots 75$$

$$\left. \begin{array}{l} \text{Time of flow from one} \\ \text{tank to another} \end{array} \right\} = \frac{2 A_1 (H_1^{\frac{1}{2}} - H_2^{\frac{1}{2}})}{C_d a \left(1 + \frac{A_1}{A_2} \right) \sqrt{2g}} \quad \dots \quad 78$$

$$\text{Loss of head due to sudden enlargement} \left\{ \begin{array}{l} = \frac{(v_1 - v_2)^2}{2g} \end{array} \right. \quad \dots \dots \dots 82$$

Loss of head due to sudden contraction	$\left\{ \begin{array}{l} = \frac{.5 v^2}{2g} \end{array} \right.$	PAGE	84
Loss of head due to obstruction	$\left\{ = \left[\frac{.4}{C_c (A - a)} - 1 \right]^2 \frac{v^2}{2g} \right.$		85

5. Notches and Weirs—

$$\text{Discharge through rectangular notch} = \frac{2}{3} C_d \sqrt{2g} L H^{\frac{3}{2}} \quad . \quad . \quad 98$$

$$,, \quad ,, \quad \text{triangular} \quad ,, = \frac{8}{15} C_d \sqrt{2g} \tan \frac{\theta}{2} H^{\frac{3}{2}} \quad . \quad . \quad 102$$

$$\text{Francis formula,} \quad Q = 3.33 (L - .1nH) H^{\frac{3}{2}} \quad . \quad . \quad 105$$

$$\text{Bazin's formula,} \quad Q = m \sqrt{2g} L H^{\frac{3}{2}} \quad . \quad . \quad 107$$

$$\text{where} \quad m = .405 + \frac{.00984}{H} \quad . \quad . \quad 107$$

$$\text{Time of emptying reservoir with rectangular weir} \left\{ = \frac{2A}{m \sqrt{2g} L} \left(\frac{1}{H_2^{\frac{1}{2}}} - \frac{1}{H_1^{\frac{1}{2}}} \right) \right. \quad . \quad . \quad 110$$

6. Friction and Flow through Pipes—

$$\text{Work done against friction by revolving disc} \left\{ = \frac{4}{5} \pi \mu \omega^3 r^5 \quad . \quad . \quad 120$$

$$h_f = \frac{4 f l v^2}{d 2g} \quad . \quad . \quad 126$$

$$\text{Time of emptying tank through long pipe} \left\{ = \frac{8A \sqrt{1 + \frac{4fl}{d}} (H_1^{\frac{1}{2}} - H_2^{\frac{1}{2}})}{\pi d^2 \sqrt{2g}} \quad . \quad . \quad 141$$

$$\text{For maximum transmission of power to nozzle} \left\{ \frac{A}{a} = \sqrt{\frac{8fl}{D}} \quad . \quad . \quad 148$$

$$\text{Due to hammerblow,} \quad p = \frac{w l v}{g t} \quad . \quad . \quad 152$$

7. Flow through Open Channels—

$$v = C \sqrt{m i} \quad . \quad . \quad 158$$

$$C = \frac{157.5}{1 + \frac{k}{\sqrt{m}}} \quad . \quad . \quad 159$$

$$\text{For maximum discharge in a trapezoidal channel} \left\{ m = \frac{d}{2} \quad . \quad . \quad 164$$

$$\text{Depth for maximum velocity in circular channel} \left\{ = 1.62r \quad . \quad . \quad 166$$

$$\text{Depth for maximum discharge in circular channel} \left\{ = 1.9r \quad . \quad . \quad 167$$

8. Reciprocating Pumps—

		PAGE
Velocity of water in pipe	$= \frac{A}{a} \omega r \sin \theta$	185
Acceleration of water in pipe	$= \frac{A}{a} \omega^2 r \cos \theta$	186
Acceleration head	$= \frac{l A}{g a} \omega^2 r \cos \theta$	186
	$h_f = \frac{4 f l}{d 2g} \left(\frac{A}{a} \omega r \sin \theta \right)^2$	191

9. Impact of Water—

Force on stationary flat plate	$= \frac{w a V^2}{g}$	205
Force on moving flat plate	$= \frac{w a (V - v)^2}{g}$	206
Work done on moving curved vane	$= W \left(\frac{V_w v}{g} \mp \frac{V_{w_1} v_1}{g} \right)$	215

10. Water Turbines—

For summary of turbine equations see page 238.

Specific speed	$= \frac{n \sqrt{P}}{H^{\frac{5}{4}}}$	254
Unit speed	$= \frac{n}{\sqrt{H}}$	262
Unit quantity	$= \frac{Q}{\sqrt{H}}$	262
Unit power	$= \frac{P}{H^{\frac{3}{2}}}$	262
Pelton wheel, for maximum efficiency, $v = .46 V$		245
Depth of bucket	$= 1.2d$	245
Width of bucket	$= 5d$	245
For no. of buckets, $\cos \gamma = \frac{R + .5d}{R + .6d}$		246

11. Centrifugal Pumps—

Work done by impeller	$= \frac{V_{w_1} v_1}{g}$	273
Manometric efficiency	$= \frac{h + h_f + \frac{V_d^2}{2g}}{\frac{V_{w_1} v_1}{g}}$	274
For least speed of starting	$\left\{ \frac{v_1^2}{2g} - \frac{v^2}{2g} = e \frac{V_{w_1} v_1}{g} \right.$	274

	PAGE
Specific speed = $\frac{n\sqrt{Q}}{h^{\frac{3}{4}}}$	282
Dia. of impeller = $\frac{1840\sqrt{H}}{n}$	286
12. Viscous Resistance of Fluids—	
$\mu = f \div \frac{dv}{dy}$	296
For water, $\mu = \frac{.00003718}{(1 + .03368t + .000221t^2)}$ ft. lb. units	298
$\nu = \frac{\mu}{\rho}$	298
For water, $\nu = \frac{.0000192}{(1 + .03368t + .000221t^2)}$ sq. ft. per sec.	298
$\frac{R}{\rho v^2} = \frac{m i g}{v^2} = C \left(\frac{dv}{v} \right)^n$	305
For stream line flow, $\left(\frac{dv}{v} \right)$ is less than 2,000, $C = S$, $n = -1$	305
For turbulent flow, $\left(\frac{dv}{v} \right)$ is greater than 2,500, $C = .032$, $n = -.23$	306
13. Hydraulic Machines, Meters, and Valves—	
Capacity of accumulator = WH	325
= $p \times \text{volume}$	
Hydraulic intensifier, $p = \frac{PA}{a}$	328
Hydraulic ram, $w = \frac{WH_1}{H_2}$	336
$e = \frac{wH_2}{WH_1}$	336
Other Useful Formulae—	
1st moment = $A\bar{x} = \int ax$	
2nd moment = $I = Ak^2 = \int ax^2$	
For moment of inertia about any axis oo at a distance h from centre of area—	
$I_0 = I_G + Ah^2$	
Moment of inertia of rectangle about base = $\frac{b d^3}{3}$	
Moment of inertia of rectangle about centre line = $\frac{b d^3}{12}$	
Moment of inertia of circle about diameter = $\frac{\pi d^4}{64}$	

Moment of inertia of triangle about base	$= \frac{BH^3}{12}$
Moment of inertia of triangle about an axis through centre of area	$= \frac{BH^3}{36}$
Distance of centre of area of semi- circle from diameter	$= \frac{4r}{3\pi}$
Distance of centre of area of semi- circular arc from diameter	$= \frac{2r}{\pi}$
Distance of centre of area of surface of a hemisphere from diameter	$= \frac{r}{2}$
Volume of sphere	$= \frac{4}{3}\pi r^3$
Surface area of sphere	$= 4\pi r^2$

Useful Constants—

Weight of 1 cu. ft. of fresh water	= 62.4 lb.
Weight of 1 gallon of fresh water	= 10 lb.
Weight of 1 cu. ft. of sea water	= 64.0 lb.
Bulk elastic modulus of water	= 300,000 lb. per sq. in.
Pressure of atmosphere	= 34 ft. of water
	= 14.7 lb. per sq. in.
	= 29.9 ins. of mercury
1 lb.	= 453.6 grammes
1 inch	= 2.54 cms.
g	= 32.2 ft. per sec. ²
1 radian	= 57.3°

USEFUL TABLES AND DATA

USEFUL TABLES AND DATA

LOGARITHMS

	0	1	2	3	4	5	6	7	8	9	1	2	3	4	5	6	7	8	9
10	0000	0043	0086	0128	0170	0212	0253	0294	0334	0374	4	9	13	17	21	26	30	34	38
11	0414	0453	0492	0531	0569	0607	0645	0682	0719	0755	4	8	12	15	19	23	27	31	35
12	0792	0828	0864	0899	0934	0969	1004	1038	1072	1106	3	7	11	14	18	21	25	28	32
13	1139	1173	1206	1239	1271	1303	1335	1367	1399	1430	3	7	10	13	16	20	23	26	30
14	1461	1492	1523	1553	1584	1614	1644	1673	1703	1732	3	6	9	12	15	18	21	24	28
15	1761	1790	1818	1847	1875	1903	1931	1959	1987	2014	3	6	9	11	14	17	20	23	26
16	2041	2068	2095	2122	2148	2175	2201	2227	2253	2279	3	5	8	11	14	16	19	22	25
17	2304	2330	2355	2380	2405	2430	2455	2480	2504	2529	3	5	8	10	13	15	18	20	23
18	2553	2577	2601	2625	2648	2672	2695	2718	2742	2765	2	5	7	9	12	14	16	19	21
19	2788	2810	2833	2856	2878	2900	2923	2945	2967	2989	2	4	7	9	11	13	16	18	20
20	3010	3032	3054	3075	3096	3118	3139	3160	3181	3201	2	4	6	8	11	13	15	17	19
21	3222	3243	3263	3284	3304	3324	3345	3365	3385	3404	2	4	6	8	10	12	14	16	18
22	3424	3444	3464	3483	3502	3522	3541	3560	3579	3598	2	4	6	8	10	12	14	15	17
23	3617	3636	3655	3674	3692	3711	3729	3747	3766	3784	2	4	6	7	9	11	13	15	17
24	3817	3820	3838	3856	3874	3892	3909	3927	3945	3962	2	4	5	7	9	11	12	14	16
25	3979	3997	4014	4031	4048	4065	4082	4099	4116	4133	2	3	5	7	9	10	12	14	15
26	4150	4166	4183	4200	4216	4232	4249	4265	4281	4298	2	3	5	7	8	10	11	13	15
27	4314	4330	4346	4362	4378	4393	4409	4425	4440	4456	2	3	5	6	8	9	11	13	14
28	4472	4487	4502	4518	4533	4548	4564	4579	4594	4609	2	3	5	6	8	9	11	12	14
29	4624	4639	4654	4669	4683	4698	4713	4728	4742	4757	1	3	4	6	7	9	10	12	13
30	4771	4786	4800	4814	4829	4843	4857	4871	4886	4900	1	3	4	6	7	9	10	11	13
31	4914	4928	4942	4955	4969	4983	4997	5011	5024	5038	1	3	4	6	7	8	10	11	12
32	5051	5065	5079	5092	5105	5119	5132	5145	5159	5172	1	3	4	5	7	8	9	11	12
33	5185	5198	5211	5224	5237	5250	5263	5276	5289	5302	1	3	4	5	6	8	9	10	12
34	5315	5328	5340	5353	5366	5378	5391	5403	5416	5428	1	3	4	5	6	8	9	10	11
35	5441	5453	5465	5478	5490	5502	5514	5527	5539	5551	1	2	4	5	6	7	9	10	11
36	5563	5575	5587	5599	5611	5623	5635	5647	5658	5670	1	2	4	5	6	7	8	10	11
37	5682	5694	5705	5717	5729	5740	5752	5763	5775	5786	1	2	3	5	6	7	8	9	10
38	5798	5809	5821	5832	5843	5855	5866	5877	5888	5899	1	2	3	5	6	7	8	9	10
39	5911	5922	5933	5944	5955	5966	5977	5988	5999	6010	1	2	3	4	5	7	8	9	10
40	6021	6031	6042	6053	6064	6075	6085	6096	6107	6117	1	2	3	4	5	6	8	9	10
41	6128	6138	6149	6160	6170	6180	6191	6201	6212	6222	1	2	3	4	5	6	7	8	9
42	6232	6243	6253	6263	6274	6284	6294	6304	6314	6325	1	2	3	4	5	6	7	8	9
43	6335	6345	6355	6365	6375	6385	6395	6405	6415	6425	1	2	3	4	5	6	7	8	9
44	6435	6444	6454	6464	6474	6484	6493	6503	6513	6522	1	2	3	4	5	6	7	8	9
45	6532	6542	6551	6561	6571	6580	6590	6599	6609	6618	1	2	3	4	5	6	7	8	9
46	6628	6637	6646	6656	6665	6675	6684	6693	6702	6712	1	2	3	4	5	6	7	7	8
47	6721	6730	6739	6749	6758	6767	6776	6785	6794	6803	1	2	3	4	5	5	6	7	8
48	6812	6821	6830	6839	6848	6857	6866	6875	6884	6893	1	2	3	4	4	5	6	7	8
49	6902	6911	6920	6929	6937	6946	6955	6964	6972	6981	1	2	3	4	4	5	6	7	8
50	6990	6998	7007	7016	7024	7033	7042	7050	7059	7067	1	2	3	3	4	5	6	7	8

The copyright of that portion of the above table which gives the logarithms of numbers from 1000 to 2000 is the property of Messrs. Macmillan & Co., Ltd., who, however, have authorized the use of the form in any reprint published for educational purposes.

0	1	2	3	4	5	6	7	8	9	1	2	3	4	5	6	7	8	9
7076	7084	7093	7101	7110	7118	7126	7135	7142	7152	1	2	3	4	5	6	7	8	9
7161	7169	7177	7185	7193	7201	7210	7218	7226	7234	1	2	3	4	5	6	7	8	9
7243	7251	7259	7267	7275	7283	7292	7300	7308	7316	1	2	3	4	5	6	7	8	9
7324	7332	7340	7348	7356	7364	7372	7380	7388	7396	1	2	3	4	5	6	7	8	9
7404	7412	7419	7427	7435	7443	7451	7459	7466	7474	1	2	3	4	5	6	7	8	9
7483	7490	7497	7505	7513	7520	7528	7536	7543	7551	1	2	3	4	5	6	7	8	9
7558	7565	7572	7579	7586	7593	7600	7607	7614	7621	1	2	3	4	5	6	7	8	9
7628	7634	7641	7648	7657	7664	7672	7679	7686	7693	1	2	3	4	5	6	7	8	9
7699	7706	7713	7720	7728	7735	7743	7752	7760	7767	1	2	3	4	5	6	7	8	9
7772	7780	7788	7796	7803	7810	7818	7826	7832	7839	1	2	3	4	5	6	7	8	9
7846	7853	7860	7868	7875	7882	7889	7896	7903	7910	1	2	3	4	5	6	7	8	9
7917	7924	7931	7938	7945	7952	7959	7966	7973	7980	1	2	3	4	5	6	7	8	9
7987	7994	8001	8008	8015	8022	8029	8036	8043	8050	1	2	3	4	5	6	7	8	9
8057	8064	8071	8078	8085	8092	8099	8106	8113	8120	1	2	3	4	5	6	7	8	9
8127	8134	8141	8148	8156	8162	8169	8176	8183	8189	1	2	3	4	5	6	7	8	9
8196	8203	8210	8217	8224	8231	8238	8245	8252	8259	1	2	3	4	5	6	7	8	9
8266	8273	8280	8287	8294	8301	8308	8315	8322	8329	1	2	3	4	5	6	7	8	9
8336	8343	8350	8357	8364	8371	8378	8385	8392	8399	1	2	3	4	5	6	7	8	9
8406	8413	8420	8427	8434	8441	8448	8455	8462	8469	1	2	3	4	5	6	7	8	9
8476	8483	8490	8497	8504	8511	8518	8525	8532	8539	1	2	3	4	5	6	7	8	9
8546	8553	8560	8567	8574	8581	8588	8595	8602	8609	1	2	3	4	5	6	7	8	9
8616	8623	8630	8637	8644	8651	8658	8665	8672	8679	1	2	3	4	5	6	7	8	9
8686	8693	8700	8707	8714	8721	8728	8735	8742	8749	1	2	3	4	5	6	7	8	9
8756	8763	8770	8777	8784	8791	8798	8805	8812	8819	1	2	3	4	5	6	7	8	9
8826	8833	8840	8847	8854	8861	8868	8875	8882	8889	1	2	3	4	5	6	7	8	9
8896	8903	8910	8917	8924	8931	8938	8945	8952	8959	1	2	3	4	5	6	7	8	9
8966	8973	8980	8987	8994	9001	9008	9015	9022	9029	1	2	3	4	5	6	7	8	9
9036	9043	9050	9057	9064	9071	9078	9085	9092	9099	1	2	3	4	5	6	7	8	9
9106	9113	9120	9127	9134	9141	9148	9155	9162	9169	1	2	3	4	5	6	7	8	9
9176	9183	9190	9197	9204	9211	9218	9225	9232	9239	1	2	3	4	5	6	7	8	9
9246	9253	9260	9267	9274	9281	9288	9295	9302	9309	1	2	3	4	5	6	7	8	9
9316	9323	9330	9337	9344	9351	9358	9365	9372	9379	1	2	3	4	5	6	7	8	9
9386	9393	9400	9407	9414	9421	9428	9435	9442	9449	1	2	3	4	5	6	7	8	9
9456	9463	9470	9477	9484	9491	9498	9505	9512	9519	1	2	3	4	5	6	7	8	9
9526	9533	9540	9547	9554	9561	9568	9575	9582	9589	1	2	3	4	5	6	7	8	9
9596	9603	9610	9617	9624	9631	9638	9645	9652	9659	1	2	3	4	5	6	7	8	9
9666	9673	9680	9687	9694	9701	9708	9715	9722	9729	1	2	3	4	5	6	7	8	9
9736	9743	9750	9757	9764	9771	9778	9785	9792	9799	1	2	3	4	5	6	7	8	9
9806	9813	9820	9827	9834	9841	9848	9855	9862	9869	1	2	3	4	5	6	7	8	9
9876	9883	9890	9897	9904	9911	9918	9925	9932	9939	1	2	3	4	5	6	7	8	9
9946	9953	9960	9967	9974	9981	9988	9995	10000										

0	1	2	3	4	5	6	7	8	9	1	2	3	4	5	6	7	8	9
100	1000	1002	1005	1007	1008	1012	1014	1016	1019	1021	0	1	1	1	1	1	1	1
1023	1026	1028	1030	1033	1035	1038	1040	1042	1045	1048	0	1	1	1	1	1	1	1
1051	1053	1056	1059	1061	1064	1067	1069	1072	1075	1078	0	1	1	1	1	1	1	1
1081	1082	1083	1084	1085	1086	1087	1088	1089	1090	1091	0	1	1	1	1	1	1	1
1092	1093	1094	1095	1096	1097	1098	1099	1100	1101	1102	0	1	1	1	1	1	1	1
1103	1104	1105	1106	1107	1108	1109	1110	1111	1112	1113	0	1	1	1	1	1	1	1
1114	1115	1116	1117	1118	1119	1120	1121	1122	1123	1124	0	1	1	1	1	1	1	1
1125	1126	1127	1128	1129	1130	1131	1132	1133	1134	1135	0	1	1	1	1	1	1	1
1136	1137	1138	1139	1140	1141	1142	1143	1144	1145	1146	0	1	1	1	1	1	1	1
1147	1148	1149	1150	1151	1152	1153	1154	1155	1156	1157	0	1	1	1	1	1	1	1
1158	1159	1160	1161	1162	1163	1164	1165	1166	1167	1168	0	1	1	1	1	1	1	1
1169	1170	1171	1172	1173	1174	1175	1176	1177	1178	1179	0	1	1	1	1	1	1	1
1180	1181	1182	1183	1184	1185	1186	1187	1188	1189	1190	0	1	1	1	1	1	1	1
1191	1192	1193	1194	1195	1196	1197	1198	1199	1200	1201	0	1	1	1	1	1	1	1
1202	1203	1204	1205	1206	1207	1208	1209	1210	1211	1212	0	1	1	1	1	1	1	1
1213	1214	1215	1216	1217	1218	1219	1220	1221	1222	1223	0	1	1	1	1	1	1	1
1224	1225	1226	1227	1228	1229	1230	1231	1232	1233	1234	0	1	1	1	1	1	1	1
1235	1236	1237	1238	1239	1240	1241	1242	1243	1244	1245	0	1	1	1	1	1	1	1
1246	1247	1248	1249	1250	1251	1252	1253	1254	1255	1256	0	1	1	1	1	1	1	1
1257	1258	1259	1260	1261	1262	1263	1264	1265	1266	1267	0	1	1	1	1	1	1	1
1268	1269	1270	1271	1272	1273	1274	1275	1276	1277	1278	0	1	1	1	1	1	1	1
1279	1280	1281	1282	1283	1284	1285	1286	1287	1288	1289	0	1	1	1	1	1	1	1
1290	1291	1292	1293	1294	1295	1296	1297	1298	1299	1300	0	1	1	1	1	1	1	1
1301	1302	1303	1304	1305	1306	1307	1308	1309	1310	1311	0	1	1	1	1	1	1	1
1312	1313	1314	1315	1316	1317	1318	1319	1320	1321	1322	0	1	1	1	1	1	1	1
1323	1324	1325	1326	1327	1328	1329	1330	1331	1332	1333	0	1	1	1	1	1	1	1
1334	1335	1336	1337	1338	1339	1340	1341	1342	1343	1344	0	1	1	1	1	1	1	1
1345	1346	1347	1348	1349	1350	1351	1352	1353	1354	1355	0	1	1	1	1	1	1	1
1356	1357	1358	1359	1360	1361	1362	1363	1364	1365	1366	0	1	1	1	1	1	1	1
1367	1368	1369	1370	1371	1372	1373	1374	1375	1376	1377	0	1	1	1	1	1	1	1
1378	1379	1380	1381	1382	1383	1384	1385	1386	1387	1388	0	1	1	1	1	1	1	1
1389	1390	1391	1392	1393	1394	1395	1396	1397	1398	1399	0	1	1	1	1	1	1	1
1400	1401	1402	1403	1404	1405	1406	1407	1408	1409	1410	0	1	1	1	1	1	1	1
1411	1412	1413	1414	1415	1416	1417	1418	1419	1420	1421	0	1	1	1	1	1	1	1
1422	1423	1424	1425	1426	1427	1428	1429	1430	1431	1432	0	1	1	1	1	1	1	1
1433	1434	1435	1436	1437	1438	1439	1440	1441	1442	1443	0	1	1	1	1	1	1	1
1444	1445	1446	1447	1448	1449	1450	1451	1452	1453	1454	0	1	1	1	1	1	1	1
1455	1456	1457	1458	1459	1460	1461	1462	1463	1464	1465	0	1	1	1	1	1	1	1
1466	1467	1468	1469	1470	1471	1472	1473	1474	1475	1476	0	1	1	1	1	1	1	1
1477	1478	1479	1480	1481	1482	1483	1484	1485	1486	1487	0	1	1	1	1	1	1	1
1488	1489	1490	1491	1492	1493	1494	1495	1496	1497	1498	0	1	1	1	1	1	1	1
1499	1500	1501	1502	1503	1504	1505	1506	1507	1508	1509	0	1	1	1	1	1	1	1
1510	1511	1512	1513	1514	1515	1516	1517	1518	1519	1520	0	1	1	1	1	1	1	1
1521	1522	1523	1524	1525	1526	1527	1528	1529	1530	1531	0	1	1	1	1	1	1	1
1532	1533	1534	1535	1536	1537	1538	1539	1540	1541	1542	0	1	1	1	1	1	1	1
1543	1544	1545	1546	1547	1548	1549	1550	1551	1552	1553	0	1	1	1	1	1	1	1
1554	1555	1556	1557	1558	1559	1560	1561	1562	1563	1564	0	1	1	1	1	1	1	1
1565	1566	1567	1568	1569	1570	1571	1572	1573	1574	1575	0	1	1	1	1	1	1	1
1576	1577	1578	1579	1580	1581	1582	1583	1584	1585	1586	0	1	1	1	1	1	1	1
1587	1588	1589	1590	1591	1592	1593	1594	1595	1596	1597	0	1	1	1	1	1	1	1
1598	1599	1600	1601	1602	1603	1604	1605	1606	1607	1608	0	1	1	1	1	1	1	1
1609	1610	1611	1612	1613	1614	1615	1616	1617	1618	1619	0	1	1	1	1	1	1	1
1620	1621	1622	1623	1624	1625	1626	1627	1628	1629	1630	0	1	1	1	1	1	1	1
1631	1632	1633	1634	1635	1636	1637	1638	1639	1640	1641	0	1	1	1	1	1	1	1
1642	1643	1644	1645	1646	1647	1648	1649	1650	1651	1652	0	1	1	1	1	1	1	1
1653	1654	1655	1656	1657	1658	1659	1660	1661	1662	1663	0	1	1	1	1	1	1	1
1664	1665	1666	1667	1668	1669	1670	1671	1672	1673	1674	0	1	1	1	1	1	1	1
1675	1676	1677	1678	1679	1680	1681	1682	1683	1684	1685	0	1	1	1	1	1	1	1
1686	1687	1688	1689	1690	1691	1692	1693	1694	1695	1696	0	1	1	1	1	1	1	1
1697	1698	1699	1700	1701	1702	1703	1704	1705	1706	1707	0	1	1	1	1	1	1	1
1708	1709	1710	1711	1712	1713	1714	1715	1716	1717	1718	0	1	1	1	1	1	1	1
1719	1720	1721	1722	1723	1724	1725	1726	1727	1728	1729	0	1	1	1	1	1	1	1
1730	1731	1732	1733	1734	1735	1736	1737	1738	1739	1740	0	1	1	1	1	1	1	1
1741	1742	1743	1744	1745	1746	1747	1748	1749	1750	1751	0	1	1	1	1	1	1	1
1752	1753	1754	1755	1756	1757	1758	1759	1760	1761	1762	0	1	1	1	1	1	1	1
1763	1764	1765	1766	1767	1768	1769	1770	1771	1772	1773	0	1	1	1	1	1	1	1
1774	1775	1776	1777	1778	1779	1780	1781	1782	1783	1784	0	1	1	1	1	1	1	1
1785	1786	1787	1788	1789	1790	1791	1792	1793	1794	1795	0	1	1	1	1	1	1	1
1796	1797	1798	1799	1800	1801	1802	1803	1804	1805	1806	0	1	1	1	1	1	1	1
1807	1808	1809	1810	1811	1812	1813	1814	1815	1816	1817	0	1	1	1	1	1	1	1
1818	1819	1820	1821	1822	1823	1824	1825	1826	1827	1828	0	1	1	1	1	1	1	1
1829	1830	1831	1832	1833	1834	1835	1836	1837	1838	1839	0	1	1	1	1	1	1	1
1840	1841	1842	1843	1844	1845	1846	1847	1848	1849	1850	0	1	1	1	1	1	1	1
1851	1852	1853	1854	1855	1856	1857	1858	1859	1860	1861	0	1	1	1	1	1	1	1
1862	1863	1864	1865	1866	1867	1868	1869	1870	1871	1872	0	1	1	1	1	1	1	1
1873	1874	1875	1876	1877	1878	1879	1880	1881	1882	1883	0	1	1	1	1	1	1	1
1884	1885	1886	1887	1888	1889	1890	1891	1892	1893	1894	0	1	1	1	1	1	1	1
1895	1896	1897	1898	1899	1900	1901	1902	1903	1904	1905	0	1	1	1	1	1	1	1
1906	1907	1908	1909	1910	1911	1912	1913	1914	1915	1916	0	1	1	1	1	1	1	1
1917	1918	1919	1920	1921	1922	1923	1924	1925	1926	1927	0	1	1	1	1	1	1	1
1928	1929	1930	1931	1932	1933	1934	1935	1936	1937	1938	0	1	1	1	1	1	1	1
1939	1940	1941	194															

LOGARITHMS

	0	1	2	3	4	5	6	7	8	9	1	2	3	4	5	6	7	8	9
51	7076	7084	7093	7101	7110	7118	7126	7135	7143	7152	1	2	3	3	4	5	6	7	8
52	7160	7168	7177	7185	7193	7202	7210	7218	7226	7235	1	2	2	3	4	5	6	7	7
53	7243	7251	7259	7267	7275	7284	7292	7300	7308	7316	1	2	2	3	4	5	6	6	7
54	7324	7332	7340	7348	7356	7364	7372	7380	7388	7396	1	2	2	3	4	5	6	6	7
55	7404	7412	7419	7427	7435	7443	7451	7459	7466	7474	1	2	2	3	4	5	5	6	7
56	7482	7490	7497	7505	7513	7520	7528	7536	7543	7551	1	2	2	3	4	5	5	6	7
57	7559	7566	7574	7582	7589	7597	7604	7612	7619	7627	1	2	2	3	4	5	5	6	7
58	7634	7642	7649	7657	7664	7672	7679	7686	7694	7701	1	1	2	3	4	4	5	6	7
59	7709	7716	7723	7731	7738	7745	7752	7760	7767	7774	1	1	2	3	4	4	5	6	7
60	7782	7789	7796	7803	7810	7818	7825	7832	7839	7846	1	1	2	3	4	4	5	6	6
61	7853	7860	7868	7875	7882	7889	7896	7903	7910	7917	1	1	2	3	4	4	5	6	6
62	7924	7931	7938	7945	7952	7959	7966	7973	7980	7987	1	1	2	3	3	4	5	6	6
63	7993	8000	8007	8014	8021	8028	8035	8041	8048	8055	1	1	2	3	3	4	5	5	6
64	8062	8069	8075	8082	8089	8096	8102	8109	8116	8122	1	1	2	3	3	4	5	5	6
65	8129	8136	8142	8149	8156	8162	8169	8176	8182	8189	1	1	2	3	3	4	5	5	6
66	8195	8202	8209	8215	8222	8229	8235	8241	8248	8254	1	1	2	3	3	4	5	5	6
67	8261	8267	8273	8279	8285	8291	8297	8303	8309	8315	1	1	2	3	3	4	5	5	6
68	8321	8327	8333	8339	8344	8351	8357	8363	8370	8376	1	1	2	3	3	4	4	5	6
69	8382	8388	8395	8401	8407	8414	8420	8426	8432	8439	1	1	2	3	3	4	4	5	6
70	8451	8457	8463	8470	8476	8482	8488	8494	8500	8506	1	1	2	2	3	4	4	5	6
71	8513	8519	8525	8531	8537	8543	8549	8555	8561	8567	1	1	2	2	3	4	4	5	5
72	8573	8579	8585	8591	8597	8603	8609	8615	8621	8627	1	1	2	2	3	4	4	5	5
73	8633	8639	8645	8651	8657	8663	8669	8675	8681	8686	1	1	2	2	3	4	4	5	5
74	8692	8698	8704	8710	8716	8722	8727	8733	8739	8745	1	1	2	2	3	4	4	5	5
75	8751	8756	8762	8768	8774	8779	8785	8791	8797	8802	1	1	2	2	3	3	4	5	5
76	8808	8814	8820	8825	8831	8837	8842	8848	8854	8859	1	1	2	2	3	3	4	5	5
77	8865	8871	8876	8882	8887	8893	8899	8904	8910	8915	1	1	2	2	3	3	4	4	5
78	8921	8927	8932	8938	8943	8949	8954	8960	8965	8971	1	1	2	2	3	3	4	4	5
79	8976	8982	8987	8993	8998	9004	9009	9015	9020	9025	1	1	2	2	3	3	4	4	5
80	9031	9036	9042	9047	9053	9058	9063	9069	9074	9079	1	1	2	2	3	3	4	4	5
81	9085	9090	9096	9101	9106	9112	9117	9122	9128	9133	1	1	2	2	3	3	4	4	5
82	9138	9143	9149	9154	9159	9165	9170	9175	9180	9186	1	1	2	2	3	3	4	4	5
83	9191	9196	9201	9206	9212	9217	9222	9227	9232	9238	1	1	2	2	3	3	4	4	5
84	9243	9248	9253	9258	9263	9269	9274	9279	9284	9289	1	1	2	2	3	3	4	4	5
85	9294	9299	9304	9309	9315	9320	9325	9330	9335	9340	1	1	2	2	3	3	4	4	5
86	9345	9350	9355	9360	9365	9370	9375	9380	9385	9390	1	1	2	2	3	3	4	4	5
87	9395	9400	9405	9410	9415	9420	9425	9430	9435	9440	0	1	1	2	2	3	3	4	4
88	9445	9450	9455	9460	9465	9470	9475	9479	9484	9489	0	1	1	2	2	3	3	4	4
89	9494	9499	9504	9509	9513	9518	9523	9528	9533	9538	0	1	1	2	2	3	3	4	4
90	9542	9547	9552	9557	9562	9566	9571	9576	9581	9586	0	1	1	2	2	3	3	4	4
91	9590	9595	9600	9605	9609	9614	9619	9624	9628	9633	0	1	1	2	2	3	3	4	4
92	9638	9643	9647	9652	9657	9661	9666	9671	9675	9680	0	1	1	2	2	3	3	4	4
93	9685	9689	9694	9699	9703	9708	9713	9717	9722	9727	0	1	1	2	2	3	3	4	4
94	9731	9736	9741	9745	9750	9754	9759	9763	9768	9773	0	1	1	2	2	3	3	4	4
95	9777	9782	9786	9791	9795	9800	9805	9809	9814	9818	0	1	1	2	2	3	3	4	4
96	9823	9827	9832	9836	9841	9845	9850	9854	9859	9863	0	1	1	2	2	3	3	4	4
97	9868	9872	9877	9881	9886	9890	9894	9899	9903	9908	0	1	1	2	2	3	3	4	4
98	9912	9917	9921	9926	9930	9934	9939	9943	9948	9952	0	1	1	2	2	3	3	4	4
99	9956	9961	9965	9969	9974	9978	9983	9987	9991	9996	0	1	1	2	2	3	3	3	4

ANTILOGARITHMS

	0	1	2	3	4	5	6	7	8	9	1	2	3	4	5	6	7	8	9
*00	1000	1002	1005	1007	1009	1012	1014	1016	1019	1021	0	0	1	1	1	1	2	2	2
*01	1023	1026	1028	1030	1033	1035	1038	1040	1042	1045	0	0	1	1	1	1	2	2	2
*02	1047	1050	1052	1054	1057	1059	1062	1064	1067	1069	0	0	1	1	1	1	2	2	2
*03	1072	1074	1076	1079	1081	1084	1086	1089	1091	1094	0	0	1	1	1	1	2	2	2
*04	1096	1099	1102	1104	1107	1109	1112	1114	1117	1119	0	1	1	1	1	1	2	2	2
*05	1122	1125	1127	1130	1132	1135	1138	1140	1143	1146	0	1	1	1	1	1	2	2	2
*06	1148	1151	1153	1156	1159	1161	1164	1167	1169	1172	0	1	1	1	1	1	2	2	2
*07	1175	1178	1180	1183	1186	1189	1191	1194	1197	1199	0	1	1	1	1	1	2	2	2
*08	1202	1205	1208	1211	1213	1216	1219	1222	1225	1227	0	1	1	1	1	1	2	2	3
*09	1230	1233	1236	1239	1242	1245	1247	1250	1253	1256	0	1	1	1	1	1	2	2	3
*10	1259	1262	1265	1268	1271	1274	1276	1279	1282	1285	0	1	1	1	1	1	2	2	3
*11	1288	1291	1294	1297	1300	1303	1306	1309	1312	1315	0	1	1	1	2	2	2	2	3
*12	1318	1321	1324	1327	1330	1334	1337	1340	1343	1346	0	1	1	1	2	2	2	2	3
*13	1349	1352	1355	1358	1361	1365	1368	1371	1374	1377	0	1	1	1	2	2	2	3	3
*14	1380	1384	1387	1390	1393	1396	1400	1403	1406	1409	0	1	1	1	2	2	2	3	3
*15	1413	1416	1419	1422	1426	1429	1432	1435	1439	1442	0	1	1	1	2	2	2	3	3
*16	1445	1449	1452	1455	1459	1462	1466	1469	1472	1476	0	1	1	1	2	2	2	3	3
*17	1479	1483	1486	1489	1493	1496	1500	1503	1507	1510	0	1	1	1	2	2	2	3	3
*18	1514	1517	1521	1524	1528	1531	1535	1538	1542	1545	0	1	1	1	2	2	2	3	3
*19	1549	1552	1556	1560	1563	1567	1570	1574	1578	1581	0	1	1	1	2	2	2	3	3
*20	1585	1589	1592	1596	1600	1603	1607	1611	1614	1618	0	1	1	1	2	2	2	3	3
*21	1622	1626	1629	1633	1637	1641	1644	1648	1652	1656	0	1	1	2	2	2	2	3	3
*22	1660	1663	1667	1671	1675	1679	1683	1687	1690	1694	0	1	1	2	2	2	2	3	3
*23	1698	1702	1706	1710	1714	1718	1722	1726	1730	1734	0	1	1	2	2	2	2	3	4
*24	1738	1742	1746	1750	1754	1758	1762	1766	1770	1774	0	1	1	2	2	2	2	3	4
*25	1778	1782	1786	1791	1795	1799	1803	1807	1811	1816	0	1	1	2	2	2	2	3	4
*26	1820	1824	1828	1832	1837	1841	1845	1849	1854	1858	0	1	1	2	2	2	2	3	4
*27	1862	1866	1871	1875	1879	1884	1888	1892	1897	1901	0	1	1	2	2	2	2	3	4
*28	1905	1910	1914	1919	1923	1928	1932	1936	1941	1945	0	1	1	2	2	2	2	3	4
*29	1950	1954	1959	1963	1968	1972	1977	1982	1986	1991	0	1	1	2	2	2	2	3	4
*30	1995	2000	2004	2009	2014	2018	2023	2028	2032	2037	0	1	1	2	2	2	2	3	4
*31	2042	2046	2051	2056	2061	2065	2070	2075	2080	2084	0	1	1	2	2	2	2	3	4
*32	2089	2094	2099	2104	2109	2113	2118	2123	2128	2133	0	1	1	2	2	2	2	3	4
*33	2138	2143	2146	2153	2158	2163	2168	2173	2178	2183	0	1	1	2	2	2	2	3	4
*34	2188	2193	2198	2203	2208	2213	2218	2223	2228	2234	1	1	2	2	3	3	3	4	5
*35	2239	2244	2249	2254	2259	2265	2270	2275	2280	2286	1	1	2	2	3	3	3	4	5
*36	2291	2296	2301	2307	2312	2317	2323	2328	2333	2339	1	1	2	2	3	3	3	4	5
*37	2344	2350	2355	2360	2366	2371	2377	2382	2388	2393	1	1	2	2	3	3	3	4	5
*38	2399	2404	2410	2415	2421	2427	2432	2438	2443	2449	1	1	2	2	3	3	3	4	5
*39	2455	2460	2466	2472	2477	2483	2489	2495	2500	2506	1	1	2	2	3	3	3	4	5
*40	2512	2518	2523	2529	2535	2541	2547	2553	2559	2564	1	1	2	2	3	3	3	4	5
*41	2570	2576	2582	2588	2594	2600	2606	2612	2618	2624	1	1	2	2	3	3	3	4	5
*42	2630	2636	2642	2648	2655	2661	2667	2673	2679	2685	1	1	2	2	3	3	3	4	5
*43	2692	2698	2704	2710	2716	2723	2729	2735	2742	2748	1	1	2	2	3	3	3	4	5
*44	2754	2761	2767	2773	2780	2786	2793	2799	2805	2812	1	1	2	2	3	3	3	4	5
*45	2818	2825	2831	2838	2844	2851	2858	2864	2871	2877	1	1	2	2	3	3	3	4	5
*46	2884	2891	2897	2904	2911	2917	2924	2931	2938	2944	1	1	2	2	3	3	3	4	5
*47	2951	2958	2965	2972	2979	2985	2992	2999	3006	3013	1	1	2	2	3	3	3	4	5
*48	3020	3027	3034	3041	3048	3055	3062	3069	3076	3083	1	1	2	2	3	3	3	4	5
*49	3090	3097	3105	3112	3119	3126	3133	3141	3148	3155	1	1	2	2	3	3	3	4	5

	0	1	2	3	4	5	6	7	8	9	1	2	3	4	5	6	7	8	9
*50	3162	3170	3177	3184	3192	3199	3206	3214	3221	3228	1	1	2	3	4	4	5	6	7
*51	3236	3243	3251	3258	3266	3273	3281	3289	3296	3304	1	2	2	3	4	5	5	6	7
*52	3311	3319	3327	3334	3342	3350	3357	3365	3373	3381	1	2	2	3	4	5	5	6	7
*53	3388	3396	3404	3412	3420	3428	3436	3443	3451	3459	1	2	2	3	4	5	6	5	7
*54	3467	3475	3483	3491	3499	3508	3516	3524	3532	3540	1	2	2	3	4	5	6	6	7
*55	3548	3556	3565	3573	3581	3589	3597	3606	3614	3622	1	2	2	3	4	5	6	7	7
*56	3631	3639	3648	3656	3664	3673	3681	3690	3698	3707	1	2	3	3	4	5	6	7	8
*57	3715	3724	3733	3741	3750	3758	3767	3776	3784	3793	1	2	3	3	4	5	6	7	8
*58	3802	3811	3819	3828	3837	3846	3855	3864	3873	3882	1	2	3	4	4	5	6	7	8
*59	3890	3899	3908	3917	3926	3936	3945	3954	3963	3972	1	2	3	4	5	5	6	7	8
*60	3981	3990	3999	4009	4018	4027	4036	4046	4055	4064	1	2	3	4	5	6	6	7	8
*61	4074	4083	4093	4102	4111	4121	4130	4140	4150	4159	1	2	3	4	5	6	7	8	9
*62	4169	4178	4188	4198	4207	4217	4227	4236	4246	4256	1	2	3	4	5	6	7	8	9
*63	4266	4276	4285	4295	4305	4315	4325	4335	4345	4355	1	2	3	4	5	6	7	8	9
*64	4365	4375	4385	4395	4406	4416	4426	4436	4446	4457	1	2	3	4	5	6	7	8	9
*65	4467	4477	4487	4498	4508	4519	4529	4539	4550	4560	1	2	3	4	5	6	7	8	9
*66	4571	4581	4592	4603	4613	4624	4634	4645	4656	4667	1	2	3	4	5	6	7	9	10
*67	4677	4688	4699	4710	4721	4732	4742	4753	4764	4775	1	2	3	4	5	6	7	8	9
*68	4786	4797	4808	4819	4831	4842	4853	4864	4875	4887	1	2	3	4	6	7	8	9	10
*69	4898	4909	4920	4932	4943	4955	4966	4977	4989	5000	1	2	3	5	6	7	8	9	10
*70	5012	5023	5035	5047	5058	5070	5082	5093	5105	5117	1	2	4	5	6	7	8	9	11
*71	5129	5140	5152	5164	5176	5188	5200	5212	5224	5236	1	2	4	5	6	7	8	10	11
*72	5248	5260	5272	5284	5297	5309	5321	5333	5346	5358	1	2	4	5	6	7	9	10	11
*73	5370	5383	5395	5408	5420	5433	5445	5458	5470	5483	1	3	4	5	6	8	9	10	11
*74	5495	5508	5521	5534	5546	5559	5572	5585	5598	5610	1	3	4	5	6	8	9	10	11
*75	5623	5636	5649	5662	5675	5689	5702	5715	5728	5741	1	3	4	5	7	8	9	10	12
*76	5754	5768	5781	5794	5808	5821	5834	5848	5861	5875	1	3	4	5	7	8	9	11	12
*77	5888	5902	5916	5929	5943	5957	5970	5984	5998	6012	1	3	4	5	7	8	10	11	12
*78	6026	6039	6053	6067	6081	6095	6109	6124	6138	6152	1	3	4	6	7	8	10	11	13
*79	6166	6180	6194	6209	6223	6237	6252	6266	6281	6295	1	3	4	6	7	9	10	11	13
*80	6310	6324	6339	6353	6368	6383	6397	6412	6427	6442	1	3	4	6	7	9	10	12	13
*81	6457	6471	6486	6501	6516	6531	6546	6561	6577	6592	2	3	5	6	8	9	11	12	14
*82	6607	6622	6637	6653	6668	6683	6699	6714	6730	6745	2	3	5	6	8	9	11	12	14
*83	6761	6776	6792	6808	6823	6839	6855	6871	6887	6902	2	3	5	6	8	9	11	13	14
*84	6918	6934	6950	6966	6982	6998	7015	7031	7047	7063	2	3	5	6	8	10	11	13	15
*85	7079	7096	7112	7129	7145	7161	7178	7194	7211	7228	2	3	5	7	8	10	12	13	15
*86	7244	7261	7278	7295	7311	7328	7345	7362	7379	7396	2	3	5	7	8	10	12	13	15
*87	7413	7430	7447	7464	7482	7499	7516	7534	7551	7568	2	3	5	7	9	10	12	14	16
*88	7586	7603	7621	7638	7656	7674	7691	7709	7727	7745	2	4	5	7	9	11	12	14	16
*89	7762	7780	7798	7816	7834	7852	7870	7889	7907	7925	2	4	5	7	9	11	13	14	16
*90	7943	7962	7980	7998	8017	8035	8054	8072	8091	8110	2	4	6	7	9	11	13	15	17
*91	8128	8147	8166	8185	8204	8222	8241	8260	8279	8299	2	4	6	8	9	11	13	15	17
*92	8318	8337	8356	8375	8395	8414	8433	8453	8472	8492	2	4	6	8	10	12	14	15	17
*93	8511	8531	8551	8570	8590	8610	8630	8650	8670	8690	2	4	6	8	10	12	14	16	18
*94	8710	8730	8750	8770	8790	8810	8831	8851	8872	8892	2	4	6	8	10	12	14	16	18
*95	8913	8933	8954	8974	8995	9016	9036	9057	9078	9099	2	4	6	8	10	12	15	17	19
*96	9120	9141	9162	9183	9204	9226	9247	9268	9290	9311	2	4	6	8	11	13	15	17	19
*97	9333	9354	9376	9397	9419	9441	9462	9484	9506	9528	2	4	7	9	11	13	15	17	20
*98	9550	9572	9594	9616	9638	9661	9683	9705	9727	9750	2	4	7	9	11	13	16	18	20
*99	9772	9795	9817	9840	9863	9886	9908	9931	9954	9977	2	5	7	9	11	14	16	18	20

TRIGONOMETRICAL FUNCTIONS

Angle. Degrees.	Sine.	Tangent.	Co-tangent.	Cosine.	
0°	0	0	∞	1	90°
1	·0175	·0175	57·2900	·9998	89
2	·0349	·0349	28·6363	·9994	88
3	·0523	·0524	19·0811	·9986	87
4	·0698	·0699	14·3007	·9976	86
5	·0872	·0875	11·4301	·9962	85
6	·1045	·1051	9·5144	·9945	84
7	·1219	·1228	8·1443	·9925	83
8	·1392	·1405	7·1154	·9903	82
9	·1564	·1584	6·3138	·9877	81
10	·1736	·1763	5·6713	·9848	80
11	·1908	·1944	5·1446	·9816	79
12	·2079	·2126	4·7046	·9781	78
13	·2250	·2309	4·3315	·9744	77
14	·2419	·2493	4·0108	·9703	76
15	·2588	·2679	3·7321	·9659	75
16	·2756	·2867	3·4874	·9613	74
17	·2924	·3057	3·2709	·9563	73
18	·3090	·3249	3·0777	·9511	72
19	·3256	·3443	2·9042	·9455	71
20	·3420	·3640	2·7475	·9397	70
21	·3584	·3839	2·6051	·9336	69
22	·3746	·4040	2·4751	·9272	68
23	·3907	·4245	2·3559	·9205	67
24	·4067	·4452	2·2460	·9135	66
25	·4226	·4663	2·1445	·9063	65
26	·4384	·4877	2·0503	·8988	64
27	·4540	·5095	1·9626	·8910	63
28	·4695	·5317	1·8807	·8829	62
29	·4848	·5543	1·8040	·8746	61
30	·5000	·5774	1·7321	·8660	60
31	·5150	·6009	1·6643	·8572	59
32	·5299	·6249	1·6003	·8480	58
33	·5446	·6494	1·5399	·8387	57
34	·5592	·6745	1·4826	·8290	56
35	·5736	·7002	1·4281	·8192	55
36	·5878	·7265	1·3764	·8090	54
37	·6018	·7536	1·3270	·7986	53
38	·6157	·7813	1·2799	·7880	52
39	·6293	·8098	1·2349	·7771	51
40	·6428	·8391	1·1918	·7660	50
41	·6561	·8693	1·1504	·7547	49
42	·6691	·9004	1·1106	·7431	48
43	·6820	·9325	1·0724	·7314	47
44	·6947	·9657	1·0355	·7193	46
45°	·7071	1·0000	1·0000	·7071	45°
	Cosine.	Co-tangent.	Tangent.	Sine.	Degrees. Angle.

HYDRAULICS

METRIC SYSTEM

1 metre	= 39·370113 in.
1 metre	= 3·28083 ft.
1 sq. metre	= 10·7639 sq. ft.
1 sq. cm.	= 0·15500 sq. in.
1 cu. metre	= 35·3145 cub. ft.
1 cu. cm.	= 0·061023 cub. in.
1 inch	= 2·54001 cm.
1 foot	= 0·3048 m.
1 sq. ft.	= 0·092903 sq. metre
1 sq. in.	= 6·4516 sq. cm.
1 cub. ft.	= 0·028317 cub. metre
1 cub. in.	= 16·387 cub. cm.
1 kg.	= 2·204622 lb.
1 lb.	= 0·453592 kg.
g. (standard)	= 32·1740 ft. per sec. ²
g. (standard)	= 980·665 cm. per sec. ²
1 kg. per cm. ²	= 14·223 lb. per in. ²
1 kg. per cm. ²	= 28·958 in. Hg.
1 kg. per cm. ²	= 735·54 mm. Hg.
1 lb per sq. in.	= 0·070307 kg. per cm. ²
1 lb. per sq. in.	= 2·0360 in. Hg.
Standard atmosphere	= 760 mm. Hg.
Standard atmosphere	= 29·921 in. of Hg.
Standard atmosphere	= 14·696 lb. per sq. in.
Standard atmosphere	= 1·0333 kg. per sq. cm.

INDEX

- ABSOLUTE pressure, 7
 Acceleration head in delivery pipe, 189
 — — in suction pipe, 187
 — — of pumps, 185
 — of piston, 185
 Accumulator, hydraulic, 324
 —, differential, 325
 Air vessel on reciprocating pumps, 196
 — —, rate of flow from, 201
 — —, work saved by, 200
 Approach, velocity of, 107
 Archimedes' principle, 25
 Atmosphere, pressure of, 6
 Axial flow turbine, impulse, 234
 — — —, reaction, 227

 BARKER's mill, 238
 Barlow's curve, 51
 Barnes & Coker, critical velocity, 132
 Bazin's coefficient for channels, 159
 — formula for weirs, 107
 Bends, loss of head in, 80
 —, river, 174
 Bernoulli's theorem, 40
 — —, proof of, 41
 Brotherton engine, 348
 Bulk modulus of water, 1
 Buoyancy, 25
 —, centre of, 26

 CAPSTAN, hydraulic, 346
 Centre of pressure, 14
 Centrifugal head of revolving liquid, 53
 — pumps, 270
 Channels, Bazin's coefficient, 159
 —, circular, 165
 —, flow through, 157
 —, — in irregular, 169
 —, rectangular, 162
 —, trapezoidal, 163
 —, variation of velocity in, 167
 Characteristic curves for turbine, 261
 — — for centrifugal pump, 284
 Chezy formula, 126
 Circular channel, 165
 Coefficient of contraction, 68
 — of discharge, 71
 — of velocity, 69
 — of discharge of pump, 183

 Colour bands, 131
 Contraction, coefficient of, 68
 —, loss of head due to, 83
 Consumption of water, 176
 Crane, hydraulic, 341
 Critical velocity, 114, 129, 131
 Current meter, 170
 Curved surface, pressure on, 2

 DAMS, pressure on, 20
 Darcy's coefficient, 126
 Deacon meter, 332
 Delivery head of pump, 183, 189
 Density of water, 2
 Differential accumulator, 325
 Diffuser, 271, 289
 Discharge, coefficient of, 71
 — over weirs, 97, 101, 103
 — through rectangular notch, 97
 — — triangular notch, 101
 Drowned orifices, 73
 Duty of pump 202

 END contractions of weir, 105
 Energy, kinetic, 39
 —, total, 40
 Engine, hydraulic, 348
 Enlargement, loss of head due to, 81
 Equilibrium of floating bodies, 25

 FLOATING bodies, equilibrium of, 25
 Floats, 172
 Flow of gases, 60
 — of gases through pipes, 143
 — of water, 36
 — of water, radial, 49
 — through channels, 157
 — — —, measurement of, 169
 of varying section, 36
 —, irregular, 169
 forked pipes, 138
 long pipes, 132
 — — nozzles, 147
 — — orifices, 68
 —, velocity of, 211
 Fluids, properties of, 1
 —, pressure of, 2
 Fourneyron turbine, 240
 Francis formula for weirs, 105
 — turbine, 240
 Friction, fluid, 114

- Friction, laws of, 114
 — in pipes, 121, 125
 Frictional resistance of floating bodies, 116
 — — of revolving disc, 120
 — head in pumps, 191
 Froude's experiments, 115
- GASES, flow of, 60, 143
 Gauging flow of water, 169
 Gauge, oil, 10
 —, pressure, 7
 Girard turbine, 241
 Gradient hydraulic, 121
- HAMMERBLOW in pipes, 151
 Head, acceleration, in pumps, 185
 —, friction, in pumps, 191
 —, losses of, 79
 Heel, angle of, 27
 Horse-power of jet, 49
 Hydraulic accumulator, 324
 — capstan, 346
 — crane, 341
 — engine, 348
 — gradient, 121
 — intensifier, 327
 — jigger, 341
 — joints and packing, 350
 — lift, 344
 — press, 3
 — ram, 336
 — valves, 348
- IMPACT of water, 205
 Impulse turbine, 96, 233
 Indicator diagram for pump, 184
 Intensifier, hydraulic, 327
 Intensity of pressure, 2, 5
 Inverted U-tube, 9
 Inward flow turbine, reaction, 226
 — — — impulse, 233
 Irregular channels, flow through, 169
- JET, horse-power of, 49
 —, impact of, 205
 —, propulsion of ships by, 217
 Jigger, hydraulic, 341
 Joints, hydraulic, 350
 Jonval turbine, 240
- KENNEDY meter, 329
 Kent Venturi meter, 332
 Kinetic energy of water, 39
- LARGE orifices, 72
 Lifts, hydraulic, 344
- Lock gates, pressure on, 18
 Loss of head in bends, 80
 — — due to sudden enlargement, 81
 — — — contraction, 83
 — — — obstruction, 84
 — — — friction, 125
 Losses of head of flowing water, 79
- MANOMETRIC efficiency of centrifugal pumps, 274
 Measurement of flow in channels, 169
 Metacentre, 27
 Metacentric height, 28
 — —, experimental determination of, 28
 — —, mathematical method, 29
 Meter, current, 170
 —, Deacon's, 332
 Meter, Kenedy, 329
 —, Kent's Venturi, 332
 —, Venturi, 44
 —, waste water, 332
 Mouthpiece, Borda, 90
 —, convergent, 88
 —, divergent, 88
 —, external, 86
- NEGATIVE slip, 183
 Notch, emptying reservoir with, 110
 —, principle of similarity, 104
 —, rectangular, 97
 —, trapezoidal, 104
 —, triangular or V, 101
 Nozzles, 147
- OBSTRUCTION, loss of head due to, 84
 Oil gauge, 10
 Orifices, drowned, 73
 —, flow through, 68
 —, large, 72
 Outward flow turbine, reaction, 224
 — — — impulse, 233
- PARALLEL flow through pipes, 138
 Pelton wheel, 241
 — —, buckets, 246
 — —, efficiency of, 245
 — —, velocity triangles for, 244
 Piezometer tube, 7
 Pipes, friction in, 121, 125
 —, hammerblow in, 151
 —, viscous flow, 302
 Pitot tube, 61
 Plate, pressure on stationary, 205
 —, — on moving, 206
 Power, transmission of, 145

- Press, hydraulic, 3
 Pressure, absolute, 6
 — of atmosphere, 6
 —, centre of, 14
 — gauge, 6
 — head of a liquid, 4
 —, intensity of, 2, 5
 —, total, 13
 —, vacuum, 7
 Propulsion of ships by jet, 217
 Pumps, centrifugal, 270
 —, —, characteristic curves, 284
 —, —, casing for, 270
 —, —, design of, 286
 —, —, diffuser, design of, 289
 —, —, efficiency of, 273
 —, —, impeller, diameter of, 284
 —, —, —, design of, 287
 —, —, least starting speed, 274
 —, —, loss due to change of
 flow, 274
 —, —, multi-stage, 290
 —, —, pressure in, 277
 —, —, velocity triangles for, 273
 —, duty of, 202
 —, reciprocating, 180
 —, —, acceleration head of, 185
 , coefficient of discharge of,
 831
 —, —, effect of air vessel on,
 196
 —, —, frictional head of, 191
 —, —, slip, 183
 —, —, work done by, 181, 192
 —, types of, 180

 RADIAL flow of water, 49
 — — reaction turbines, 226
 — — impulse turbines, 233
 Rainfall, 178
 Rain gauge, 176
 Ram, hydraulic, 336
 Reaction turbines, 224
 Reciprocating pumps, 180
 Rectangular channel, 162
 Relay governor, 256
 Resistance of ships, 116, 316
 Revolving cylinder of liquid, 57
 — disc, friction of, 120
 — liquid, centrifugal head, 53
 Reynold's experiments, 127
 Righting moment, 27
 River bends, 174

 SCOTCH turbine, 238
 Sections of channels, 162, 163, 165
 Ships, propulsion by jet of, 217
 Ships, resistance of, 116, 316
 Similarity of weirs, principle of, 104
 — of turbines, principle of, 264
 — of centrifugal pumps, 282
 —, dimensional, principle of, 317
 Specific gravity, 2
 — speed of centrifugal pumps, 280
 — of turbines, 252
 Stream line flow, 36
 Suction head of pump, 183
 Sudden contraction, loss of head due
 to, 83
 — enlargement, loss of head due
 to, 81
 Surge tank, 260
 Syphon, 123

 TANKS, time of emptying, 74
 Thomson's principle of similarity, 104
 — turbine, 240
 Time of emptying reservoir by weir,
 110
 — — — through pipe, 140
 — — tanks, 74
 Total pressure, 13
 Transmission of power, 145
 Trapezoidal channel, 163
 Triangle of velocity for moving vane,
 210
 Turbines, axial flow impulse, 234
 —, — — reaction, 227
 —, characteristic curves, 261
 —, classification of, 222
 —, Fourneyron, 240
 —, Francis, 240
 —, Girard, 241
 —, governing of, 256
 —, impulse, 233
 —, inward flow reaction, 226
 —, Jonval, 240
 —, mixed flow reaction, 227
 —, model testing, 264
 —, modern, 227
 —, notation for, 223
 —, outward flow reaction, 224
 —, radial flow impulse, 233
 —, reaction, 224
 —, Scotch, 238
 —, specific speed of, 252
 —, summary of formulae, 238
 —, Thomson, 240
 —, types of, 238
 —, unit power, 261
 —, —, quantity, 262
 —, —, speed, 262
 Tweddell's differential accumulator,
 325

- UNIT power, 261
 —, quantity, 262
 —, speed, 262
 Unwin, coefficient of friction for gas, 143
 —, friction of revolving disc, 120
 U-tube, 7
 —, enlarged ends, 10
 —, inverted, 9

 VACUUM pressure, 7
 Valves, hydraulic, 348
 Vane, pressure on fixed curved, 209
 —, pressure on moving curved, 210
 —, radial, 214
 Velocity, coefficient of, 69
 —, critical, 114, 129, 131
 —, head, 39
 — in pipe, distribution of, 132
 — of approach, 107
 — of flow, 211
 — of whirl, 211
 — triangles for moving vane, 210
 —, variation of, in channels, 167
 Vena contracta, 68
 Venturi meter, 44
 Viscosity, 2, 295
 —, viscous flow, 295

 Viscosity, coefficient of, 295
 —, effect of temperature, 297
 —, kinematic, 298
 —, Reynold's criterion, 299
 —, Stanton's curve, 299
 Viscous resistance, round pipes, 302
 —, equation for, 305
 —, flat surfaces, 309
 —, floating, bodies, 316
 —, oiled bearing, 313
 Volute chamber, 270, 272
 Vortex, 53
 — chamber, 270, 272

 WASTE water meter, 332
 Water, consumption of, 176
 —, impact of, 205
 — meters, 332
 — supply, 176
 Wave resistance of ships, 116, 316
 Weirs, Bazin's formula, 107
 —, emptying reservoir with, 110
 —, end contractions, 105
 —, Francis formula, 105
 —, principle of similarity, 104
 —, velocity of approach, 107
 Whirlpool chamber, 270, 272
 Whirl, velocity of, 211
 Work done against pressure, 37

AN ABRIDGED LIST OF TECHNICAL BOOKS

PUBLISHED BY
Sir Isaac Pitman & Sons, Ltd.

Parker Street, Kingsway, London, W.C.2

The prices given apply only to Great Britain

A complete Catalogue giving full details of the following books
will be sent post free on application

CONTENTS

	PAGE		PAGE
AERONAUTICS	9, 10	MATHEMATICS AND CALCULATIONS FOR ENGINEERS .	16, 17
ART AND CRAFT WORK.	2	MECHANICAL ENGINEERING .	8, 9
ARTISTIC CRAFT SERIES	2	METALLURGY AND METAL WORK	5, 6
ASTRONOMY.	10	MINERALOGY AND MINING .	6
CIVIL ENGINEERING, BUILDING, ETC.	7, 8	MISCELLANEOUS TECHNICAL BOOKS	17, 18
COMMON COMMODITIES AND INDUSTRIES SERIES	21, 22	MOTOR ENGINEERING	11
CONSTRUCTIONAL ENGINEERING.	7	OPTICS AND PHOTOGRAPHY .	10
DRAUGHTSMANSHIP	4	PHYSICS, CHEMISTRY, ETC. .	4, 5
ELECTRICAL ENGINEERING, ETC.	11-15	TECHNICAL PRIMERS	18-20
MARINE ENGINEERING	10	TELEGRAPHY, TELEPHONY, AND WIRELESS.	15, 16
		TEXTILE MANUFACTURE ETC. .	3, 4

ALL PRICES ARE NET

THE ARTISTIC CRAFT SERIES

	s.	d.
BOOKBINDING AND THE CARE OF BOOKS. By Douglas Cockerell.		
Fourth Edition	7	6
DRESS DESIGN. By Talbot Hughes	12	6
EMBROIDERY AND TAPESTRY WEAVING. By Mrs. A. H. Christie.		
Fourth Edition	10	6
HAND-LOOM WEAVING. By Luther Hooper	10	6
HERALDRY. By Sir W. H. St. John Hope, Litt.D., D.C.L.	12	6
SILVERWORK AND JEWELLERY. By H. Wilson. Second Edition	10	6
STAINED GLASS WORK. By C. W. Whall	10	6
WOOD-BLOCK PRINTING. By F. Morley Fletcher	8	6
WOODCARVING DESIGN AND WORKMANSHIP. By George Jack.		
Second Edition	8	6
WRITING AND ILLUMINATING AND LETTERING. By Edward Johnston. Sixteenth Edition	8	6

ART AND CRAFT WORK, ETC.

BLOCK-CUTTING AND PRINT-MAKING BY HAND. By Margaret Dobson, A.R.E.	12	6
CABINET-MAKING, THE ART AND CRAFT OF. By D. Denning	5	0
CELLULOSE LACQUERS. By S. Smith, O.B.E., Ph.D.	7	6
HANDICRAFTS, HOME DECORATIVE. By Mrs. F. Jefferson-Graham	25	0
LACQUER WORK. By G. Koizumi	15	0
LEATHER CRAFT, ARTISTIC. By Herbert Turner	5	0
LEATHER WORK: STAMPED, MOULDED, CUT, CUIR-BOUILLI, SEWN, ETC. By Charles G. Leland. Third Edition	5	0
LETTERING, DECORATIVE WRITING AND ARRANGEMENT OF. By Prof. A. Erdmann and A. A. Braun. Second Edition.	10	6
LETTERING AND DESIGN, EXAMPLES OF. By J. Littlejohns, R.B.A.	4	0
LETTERING, PLAIN AND ORNAMENTAL. By Edwin G. Fooks	3	6
MANUSCRIPT AND INSCRIPTION LETTERS. By Edward Johnston.	7	6
MANUSCRIPT WRITING AND LETTERING. By an Educational Expert	6	0
METAL WORK. By Charles G. Leland. Second Edition.	5	0
ORNAMENTAL HOME CRAFTS. By Idalia B. Littlejohns	10	6
PLYWOOD AND GLUE, MANUFACTURE AND USE OF. By B. C. Boulton, B.Sc.	7	6
POTTERY, HANDCRAFT. By H. and D. Wren.	12	6
STAINED GLASS, THE ART AND CRAFT OF. By E. W. Twining	42	0
STENCIL-CRAFT. By Henry Cadness, F.S.A.M.	10	6
WEAVING FOR BEGINNERS. By Luther Hooper	5	0
WEAVING WITH SMALL APPLIANCES—		
THE WEAVING BOARD. By Luther Hooper	7	6
TABLE LOOM WEAVING. By Luther Hooper	7	6
TABLET WEAVING. By Luther Hooper	7	6
WOOD CARVING. By Charles G. Leland. Fifth Edition	5	0
WOODCARVING, HANDICRAFT OF. By James Jackson	4	0

TEXTILE MANUFACTURE

TEXTILE MANUFACTURE, ETC.		s.	d.
ARTIFICIAL SILK. By Dr. V. Hottenroth. Translated from the German by Dr. E. Fyleman, B.Sc.		30	0
ARTIFICIAL SILK. By Dr. O. Faust. Translated by Dr. E. Fyleman		10	6
ARTIFICIAL SILK AND ITS MANUFACTURE. By Joseph Foltzer. Translated into English by T. Woodhouse. 4th Ed.		21	0
ARTIFICIAL SILK OR RAYON, ITS MANUFACTURE AND USES. By T. Woodhouse, F.T.I. Second Edition		7	6
ARTIFICIAL SILK OR RAYON, THE PREPARATION AND WEAVING OF. By T. Woodhouse, F.T.I.		10	6
BLEACHING, DYEING, PRINTING, AND FINISHING FOR THE MANCHESTER TRADE. By J. W. McMyn, F.C.S., and J. W. Bardsley. Second Edition		6	0
COLOUR IN WOVEN DESIGN. By Roberts Beaumont, M.Sc., M.I.Mech.E. Second Edition, Revised and Enlarged.		21	0
COTTON SPINNER'S POCKET BOOK, THE. By James F. Innes. Third Edition		3	6
COTTON SPINNING COURSE, A FIRST YEAR. By H. A. J. Duncan, A.T.I.		5	0
COTTON WORLD, THE. Compiled and Edited by J. A. Todd, M.A., B.L.		5	0
DRESS, BLOUSE, AND COSTUME CLOTHS. DESIGN AND FABRIC MANUFACTURE. By Roberts Beaumont, M.Sc., M.I.Mech.E., and Walter G. Hill		42	0
FLAX AND JUTE, SPINNING, WEAVING, AND FINISHING OF. By T. Woodhouse, F.T.I.		10	6
FLAX CULTURE AND PREPARATION. By F. Bradbury. 2nd Ed.		10	6
FUR. By MAX BACHRACH, B.C.S.		21	0
FURS AND FURRIERY. By Cyril J. Rosenberg		30	0
HOSIERY MANUFACTURE. By Prof. W. Davis, M.A. 2nd Ed.		5	0
KNITTED FABRICS, CALCULATIONS AND COSTINGS FOR. By Professor William Davis, M.A.		10	6
LOOM, THEORY AND ELECTRICAL DRIVE OF THE. By R. H. Wilmot, M.Sc., A.M.I.E.E., Assoc.A.I.E.E.		8	6
MEN'S CLOTHING, ORGANIZATION, MANAGEMENT, AND TECHNOLOGY IN THE MANUFACTURE OF. By M. E. Popkin.		25	0
PATTERN CONSTRUCTION, THE SCIENCE OF. For Garment Makers. By B. W. Poole		45	0
TEXTILE CALCULATIONS. By J. H. Whitwam, B.Sc. (Lond.)		25	0
TEXTILE EDUCATOR, PITMAN'S. Edited by L. J. Mills, <i>Fellow of the Textile Institute</i> . In three volumes		63	0
TEXTILES FOR SALESMEN. By E. Ostick, M.A., L.C.P.		5	0
TEXTILES, INTRODUCTION TO. By A. E. Lewis, A.M.C.T., A.T.I.		3	6
TOWELS AND TOWELLING, THE DESIGN AND MANUFACTURE OF. By T. Woodhouse, F.T.I., and A. Brand, A.T.I.. . . .		12	6
WEAVING AND MANUFACTURING, HANDBOOK OF. By H. Greenwood, A.T.I.. . . .		5	0
WOOLLEN YARN PRODUCTION. By T. Lawson		3	6
WOOL SUBSTITUTES, By Roberts Beaumont, M.Sc., M.I.Mech.E.		10	6

PITMAN'S TECHNICAL BOOKS

Textile Manufacture, etc.—contd.

WOOL, THE MARKETING OF. By A. F. DuPlessis, M.A. . . .	s. d. 12 6
WORSTED OPEN DRAWING. By S. Kershaw, F.T.I. . . .	5 0
YARNS AND FABRICS, THE TESTING OF. By H. P. Curtis. 2nd Ed. . . .	5 0

DRAUGHTSMANSHIP

BLUE PRINT READING. By J. Brahdry, B.Sc., C.E. . . .	10 6
DRAWING AND DESIGNING. By Charles G. Leland, M.A. Fourth Edition . . .	3 6
DRAWING OFFICE PRACTICE. By H. Pilkington Ward, M.Sc., A.M.Inst.C.E. . . .	7 6
ENGINEER DRAUGHTSMEN'S WORK. By A Practical Draughtsman . . .	2 6
ENGINEERING DESIGN, EXAMPLES IN. By G. W. Bird, B.Sc. Second Edition . . .	6 0
ENGINEERING HAND SKETCHING AND SCALE DRAWING. By Thos. Jackson, M.I.Mech.E., and Percy Bentley, A.M.I.Mech.E. . .	3 0
ENGINEERING WORKSHOP DRAWING. By A. C. Parkinson, B.Sc. Second Edition . . .	4 0
MACHINE DRAWING, A PREPARATORY COURSE TO. By P. W. Scott . . .	2 0
PLAN COPYING IN BLACK LINES. By B. J. Hall, M.I.Mech.E.. . .	2 6

PHYSICS, CHEMISTRY, ETC.

ARTIFICIAL RESINS. By J. Scheiber, Ph.D. Translated by E. Fyleman, B.Sc., Ph.D., F.I.C. . . .	30 0
BIOLOGY, INTRODUCTION TO PRACTICAL. By N. Walker. . .	5 0
BOTANY, TEST PAPERS IN. By E. Drabble, D.Sc. . . .	2 0
CHEMICAL ENGINEERING, AN INTRODUCTION TO. By A. F. Allen, B.Sc. (Hons.), F.C.S., LL.B. . . .	10 6
CHEMISTRY, A FIRST BOOK OF. By A. Coulthard, B.Sc. (Hons.), Ph.D., F.I.C. . . .	3 0
CHEMISTRY, DEFINITIONS AND FORMULAE FOR STUDENTS. By W. G. Carey, F.I.C. . . .	— 6
CHEMISTRY, TEST PAPERS IN. By E. J. Holmyard, M.A.. . .	2 0
With Points Essential to Answers . . .	3 0
CHEMISTRY, HIGHER TEST PAPERS IN. By the same Author. 1. Inorganic. 2. Organic. . . . Each	3 0
DISPENSING FOR PHARMACEUTICAL STUDENTS. By J. W. Cooper and F. J. Dyer. Second Edition . . .	7 6
ELECTRICITY AND MAGNETISM, FIRST BOOK OF. By W. Perren Maycock, M.I.E.E. Fourth Edition. . . .	6 0
ENGINEERING PRINCIPLES, ELEMENTARY. By G. E. Hall, B.Sc. . .	2 6
ENGINEERING SCIENCE, A PRIMER OF. By Ewart S. Andrews, B.Sc. (Eng.). . . .	
Part I. FIRST STEPS IN APPLIED MECHANICS. . . .	2 6
II. FIRST STEPS IN HEAT AND HEAT ENGINES . . .	2 0
LATIN FOR PHARMACEUTICAL STUDENTS. By J. W. Cooper and A. C. McLaren . . .	6 0

Physics, Chemistry, etc.—contd.

s. d.

MAGNETISM AND ELECTRICITY, HIGHER TEST PAPERS IN. By P. J. Lancelot Smith, M.A.	3	0
MAGNETISM AND ELECTRICITY, QUESTIONS AND SOLUTIONS IN. Solutions by W. J. White, M.I.E.E. Third Edition	5	0
ORGANIC PIGMENTS, ARTIFICIAL. By Dr. C. A. Curtis. Translated by Ernest Fyleman, B.Sc., Ph.D., F.I.C.	21	0
PHARMACEUTICAL CHEMISTRY, PRACTICAL. By J. W. Cooper, Ph.C., and F. N. Appleyard, B.Sc., F.I.C., Ph.C.	5	0
PHARMACOGNOSY, A TEXTBOOK OF. Part I—PRACTICAL. By W. J. Cooper, Ph.C., T. C. Denston, and M. Riley	10	6
PHARMACY, A COURSE IN PRACTICAL. By J. W. Cooper, Ph.C., and F. N. Appleyard, B.Sc., F.I.C., Ph.C.	7	6
PHARMACY, GENERAL AND OFFICIAL. By J. W. Cooper Ph.C.	10	6
PHYSICAL SCIENCE, PRIMARY. By W. R. Bower, B.Sc.	5	0
PHYSICS, EXPERIMENTAL. By A. Cowling. With Arithmetical Answers to the Problems	1	9
PHYSICS, TEST PAPERS IN. By P. J. Lancelot-Smith, M.A.	2	0
Points Essential to Answers, 4s. In one book	5	6
VOLUMETRIC ANALYSIS. By J. B. Coppock, B.Sc. (Lond.), F.I.C., F.C.S. Second Edition	3	6
VOLUMETRIC WORK, A COURSE OF. By E. Clark, B.Sc.	4	6

METALLURGY AND METAL WORK

BALL AND ROLLER BEARINGS, HANDBOOK OF. By A. W. Macaulay, A.M.I.Mech.E.	7	6
ELECTROPLATING. By S. Field and A. Dudley Weill	5	0
ELECTROPLATING WITH CHROMIUM, COPPER, AND NICKEL. By Benjamin Freeman, Ph.D., and Frederick G. Hoppe	21	0
ENGINEERING MATERIALS. Vol. I. FERROUS. By A. W. Judge, Wh.Sc., A.R.C.S.	30	0
ENGINEERING MATERIALS. Vol. II. NON-FERROUS. By A. W. Judge, Wh.Sc., A.R.C.S.	40	0
ENGINEERING MATERIALS. Vol. III. THEORY AND TESTING. OF MATERIALS. By A. W. Judge, Wh.Sc., A.R.C.S.	21	0
ENGINEERING WORKSHOP EXERCISES. By Ernest Pull, A.M.I.Mech.E., M.I.Mar.E. Second Edition, Revised. . . .	3	6
ETCHING, METALLOGRAPHERS' HANDBOOK OF. Compiled by T. Berglund. Translated by W. H. Dearden	12	6
FILES AND FILING. By Ch. Fremont. Translated into English under the supervision of George Taylor	21	0
FITTING, THE PRINCIPLES OF. By J. Horner, A.M.I.M.E. Fifth Edition, Revised and Enlarged	7	6
FOUNDRYWORK AND METALLURGY. Edited by R. T. Rolfe, F.I.C. In six volumes. Each	6	0
IRONFOUNDING, PRACTICAL. By J. Horner, A.M.I.M.E. Fifth Edition, Revised by Walter J. May	10	0
IRON ROLLS, THE MANUFACTURE OF CHILLED. By A. Allison	8	6
JOINT WIPING AND LEAD WORK. By William Hutton. Third Edition	5	0
METAL TURNING. By J. Horner, A.M.I.M.E. Fourth Edition,	6	0

PITMAN'S TECHNICAL BOOKS

Metallurgy and Metal Work—contd.

	s. d.
METAL WORK, PRACTICAL SHEET AND PLATE. By E. A. Atkins, A.M.I.M.E. Third Edition, Revised and Enlarged	7 6
METALLURGY OF BRONZE. By H. C. Dews	12 6
METALLURGY OF CAST IRON. By J. E. Hurst	15 0
PATTERN MAKING, THE PRINCIPLES OF. By J. Horner, A.M.I.M.E. Fifth Edition	4 0
PIPE AND TUBE BENDING AND JOINTING. By S. P. Marks, M.S.I.A.	6 0
PYROMETERS. By E. Griffiths, D.Sc.	7 6
STEEL WORKS ANALYSIS. By J. O. Arnold, F.R.S., and F. Ibbotson. Fourth Edition, thoroughly revised	12 6
WELDING, ELECTRIC. By L. B. Wilson.	5 0
WELDING, ELECTRIC ARC AND OXY-ACETYLENE. By E. A. Atkins, A.M.I.M.E.	7 6
WORKSHOP GAUGES AND MEASURING APPLIANCES. By L. Burn, A.M.I.Mech.E., A.M.I.E.E.	5 0

MINERALOGY AND MINING

BLASTING WITH HIGH EXPLOSIVES. By W. Gerard Boulton	5 0
COAL CARBONIZATION. By John Roberts, D.I.C., M.I.Min.E., F.G.S.	25 0
COAL MINING, DEFINITIONS AND FORMULAE FOR STUDENTS. By M. D. Williams, F.G.S.	- 6
COLLIERY ELECTRICAL ENGINEERING. By G. M. Harvey. Second Edition	15 0
ELECTRICAL ENGINEERING FOR MINING STUDENTS. By G. M. Harvey, M.Sc., B.Eng., A.M.I.E.E.	5 0
ELECTRICITY APPLIED TO MINING. By H. Cotton, M.B.E., D.Sc., A.M.I.E.E.	35 0
ELECTRIC MINING MACHINERY. By Sydney F. Walker, M.I.E.E., M.I.M.E., A.M.I.C.E., A.Amer.I.E.E.	15 0
LOW TEMPERATURE DISTILLATION. By S. North and J. B. Garbe	15 0
MINERALOGY. By F. H. Hatch, O.B.E., Ph.D., F.G.S., M.I.C.E. M.I.M.M. Sixth Edition, Revised	6 0
MINING CERTIFICATE SERIES, PITMAN'S. Edited by John Roberts, D.I.C., M.I.Min.E., F.G.S., Editor of <i>The Mining Educator</i> —	
MINING LAW AND MINE MANAGEMENT. By Alexander Watson, A.R.S.M.	8 6
MINE VENTILATION AND LIGHTING. By C. D. Mottram, B.Sc.	8 6
COLLIERY EXPLOSIONS AND RECOVERY WORK. By J. W. Whitaker, Ph.D. (Eng.), B.Sc., F.I.C., M.I.Min.E.	8 6
ARITHMETIC AND SURVEYING. By R. M. Evans, B.Sc., F.G.S., M.I.Min.E.	8 6
MINING MACHINERY. By T. Bryson, A.R.T.C., M.I.Min.E.	12 6
WINNING AND WORKING. By Prof. Ira C. F. Statham, B.Eng., F.G.S. M.I.Min.E.	21 0
MINING EDUCATOR, THE. Edited by J. Roberts, D.I.C., M.I.Min.E., F.G.S. In two vols.	63 0
MINING SCIENCE, A JUNIOR COURSE IN. By Henry G. Bishop.	2 6
TIN MINING. By C. G. Moor, M.A.	8 6

CONSTRUCTIONAL ENGINEERING

s. d.

REINFORCED CONCRETE, DETAIL DESIGN IN. By Ewart S. Andrews, B.Sc. (Eng.)	6	0
REINFORCED CONCRETE. By W. Noble Twelvetrees, M.I.M.E., A.M.I.E.E.	21	0
REINFORCED CONCRETE MEMBERS, SIMPLIFIED METHODS OF CALCULATING. By W. Noble Twelvetrees. Second Edition.	5	0
SPECIFICATIONS FOR BUILDING WORKS. By W.L. Evershed, F.S.I.	5	0
STRUCTURES, THE THEORY OF. By H. W. Coultas, M.Sc., A.M.I.Struct.E., A.I.Mech.E.	15	0

CIVIL ENGINEERING, BUILDING, ETC.

AUDEL'S MASONS' AND BUILDERS' GUIDES. In four volumes		
Each	7	6
1. BRICKWORK, BRICK-LAYING, BONDING, DESIGNS		
2. BRICK FOUNDATIONS, ARCHES, TILE SETTING, ESTIMATING		
3. CONCRETE MIXING, PLACING FORMS, REINFORCED STUCCO		
4. PLASTERING, STONE MASONRY, STEEL CONSTRUCTION, BLUE PRINTS		
AUDEL'S PLUMBERS' AND STEAM FITTERS' GUIDES. Practical Handbooks in four volumes	7	6
1. MATHEMATICS, PHYSICS, MATERIALS, TOOLS, LEADWORK		
2. WATER SUPPLY, DRAINAGE, ROUGH WORK, TESTS		
3. PIPE FITTING, HEATING, VENTILATION, GAS, STEAM		
4. SHEET METAL WORK, SMITHING, BRAZING, MOTORS		
BRICKWORK, CONCRETE, AND MASONRY. Edited by T. Corkhill, M.I.Struct.E. In eight volumes	6	0
"THE BUILDER" SERIES—		
ARCHITECTURAL HYGIENE; OR, SANITARY SCIENCE AS APPLIED TO BUILDINGS. By Sir Banister Fletcher, F.R.I.B.A., F.S.I., and H. Phillips Fletcher, F.R.I.B.A., F.S.I. Fifth Edition, Revised	10	6
CARPENTRY AND JOINERY. By Sir Banister Fletcher, F.R.I.B.A., F.S.I., etc., and H. Phillips Fletcher, F.R.I.B.A., F.S.I., etc. Fifth Edition, Revised	10	6
QUANTITIES AND QUANTITY TAKING. By W. E. Davis. Seventh Edition, Revised by P. T. Walters, F.S.I., F.I.Arb.	6	0
BUILDING, DEFINITIONS AND FORMULAE FOR STUDENTS. By T. Corkhill, F.B.I.C.C., M.I.Struct.E.	-	6
BUILDING EDUCATOR, PITMAN'S. Edited by R. Greenhalgh, A.I.Struct.E. In three volumes	63	0
FIELD MANUAL OF SURVEY METHODS AND OPERATIONS. By A. Lovat Higgins, B.Sc., A.R.C.S., A.M.I.C.E.	21	0
HYDRAULICS. By E. H. Lewitt, B.Sc. (Lond.), M.I.Ae.E., A.M.I.M.E. Fourth Edition	10	6
HYDRAULICS FOR ENGINEERS. By Robert W. Angus, B.A.Sc.	12	6

PITMAN'S TECHNICAL BOOKS

Civil Engineering, Building, etc.—contd.

	s.	d.
JOINERY & CARPENTRY. Edited by R. Greenhalgh, A.I.Struct.E.		
In six volumes Each	6	0
MECHANICS OF BUILDING. By Arthur D. Turner, A.C.G.I.,		
A.M.I.C.E.	5	0
PAINTING AND DECORATING. Edited by C. H. Eaton, F.I.B.D.		
In six volumes Each	7	6
PLUMBING AND GASFITTING. Edited by Percy Manser, R.P.,		
A.R.San.I. In seven volumes Each	6	0
SURVEYING, TUTORIAL LAND AND MINE. By Thomas		
Bryson	10	6
WATER MAINS, LAY-OUT OF SMALL. By H. H. Hellins,		
M.Inst.C.E.	7	6
WATERWORKS FOR URBAN AND RURAL DISTRICTS. By H. C.		
Adams, M.Inst.C.E., M.I.M.E., F.S.I. Second Edition. .	15	0

MECHANICAL ENGINEERING

AUDEL'S ENGINEERS' AND MECHANICS' GUIDES. In eight		
volumes. Vols. 1-7 Each	7	6
Vol. 8	15	0
CONDENSING PLANT. By R. J. Kaula, M.I.E.E., and I. V.		
Robinson, Wh.Sc., A.M.Inst.C.E.	30	0
DEFINITIONS AND FORMULAE FOR STUDENTS—APPLIED ME-		
CHANICS. By E. H. Lewitt, B.Sc., A.M.I.Mech.E.	-	6
DEFINITIONS AND FORMULAE FOR STUDENTS—HEAT ENGINES.		
By A. Rimmer, B.Eng. Second Edition.	-	6
DIESEL ENGINES: MARINE, LOCOMOTIVE, AND STATIONARY. By		
David Louis Jones, <i>Instructor, Diesel Engine Department,</i>		
<i>U.S. Navy Submarine Department</i>	21	0
ENGINEERING EDUCATOR, PITMAN'S. Edited by W. J.		
Kearton, M.Eng., A.M.I.Mech.E., A.M.Inst.N.A. In three		
volumes	63	0
ESTIMATING FOR MECHANICAL ENGINEERS. By L. E. Bunnett,		
A.M.I.P.E.	10	6
FRICTION CLUTCHES. By R. Waring-Brown, A.M.I.A.E.,		
F.R.S.A., M.I.P.E.	5	0
FUEL ECONOMY IN STEAM PLANTS. By A. Grounds, B.Sc.,		
F.I.C., F.Inst.P.	5	0
FUEL OILS AND THEIR APPLICATIONS. By H. V. Mitchell,		
F.C.S. Second Edition, Revised by A. Grounds, B.Sc., A.I.C.	5	0
MECHANICAL ENGINEERING DETAIL TABLES. By P. Ross .	7	6
MECHANICAL ENGINEER'S POCKET BOOK, WHITTAKER'S. Third		
Edition, entirely rewritten and edited by W. E. Dommett,		
A.F.Ae.S., A.M.I.A.E.	12	6
MECHANICS' AND DRAUGHTSMEN'S POCKET BOOK. By W. E.		
Dommett, Wh.Ex., A.M.I.A.E.	2	6
MECHANICS FOR ENGINEERING STUDENTS. By G. W. Bird,		
B.Sc., A.M.I.Mech.E., A.M.I.E.E. Second Edition . . .	5	0
MECHANICS OF MATERIALS, EXPERIMENTAL. By H. Carrington,		
M.Sc. (Tech.), D.Sc., M.Inst.Met., A.M.I.Mech.E., A.F.R.Æ.S.	3	6

Mechanical Engineering—contd.

s. d.

MOLLIER STEAM TABLES AND DIAGRAMS, THE. Extended to the Critical Pressure. English Edition adapted and amplified from the Third German Edition by H. Moss, D.Sc., A.R.C.S., D.I.C.	7	6
MOLLIER STEAM DIAGRAMS. Separately in envelope	2	0
MOTIVE POWER ENGINEERING. By Henry C. Harris, B.Sc. . .	10	6
STEAM CONDENSING PLANT. By John Evans, M.Eng., A.M.I.Mech.E.	7	6
STEAM PLANT, THE CARE AND MAINTENANCE OF. By J. E. Braham, B.Sc., A.C.G.I.	5	0
STEAM TURBINE OPERATION. By W. J. Kearton, M.Eng., A.M.I.Mech.E., A.M.Inst.N.A.	12	6
STEAM TURBINE THEORY AND PRACTICE. By W. J. Kearton, A.M.I.M.E. Third Edition	15	0
STRENGTH OF MATERIALS. By F. V. Warnock, Ph.D., B.Sc. (Lond.), F.R.C.Sc.I., A.M.I.Mech.E.	12	6
TEXTILE MECHANICS AND HEAT ENGINES. By Arthur Riley, M.Sc. (Tech.), B.Sc., A.M.I.Mech.E., and Edward Dunkerley	15	0
THEORY OF MACHINES. By Louis Toft, M.Sc.Tech., and A. T. J. Kersey, B.Sc. Second Edition	12	6
THERMODYNAMICS, APPLIED. By Prof. W. Robinson, M.E., M.Inst.C.E.	18	0
TURBO-BLOWERS AND COMPRESSORS. By W. J. Kearton, A.M.I.M.E.	21	0
UNIFLOW BACK-PRESSURE AND STEAM EXTRACTION ENGINES. By Eng. Lieut.-Com. T. Allen, R.N.(S.R.), M.Eng., M.I.Mech.E.	42	0
WORKSHOP PRACTICE. Edited by E. A. Atkins, M.I.Mech.E., M.I.W.E. In eight volumes Each	6	0

AERONAUTICS, ETC.

AERO ENGINES, LIGHT. By C. F. Caunter	12	6
AEROBATICS. By Major O. Stewart, M.C., A.F.C.	5	0
AERONAUTICS, DEFINITIONS AND FORMULAE FOR STUDENTS. By J. D. Frier, A.R.C.Sc., D.I.C., F.R.Ae.S.	—	6
AEROPLANE STRUCTURAL DESIGN. By T. H. Jones, B.Sc., A.M.I.M.E., and J. D. Frier, A.R.C.Sc., D.I.C.	21	0
AIR AND AVIATION LAW. By W. Marshall Freeman, <i>Barrister-at-Law</i>	7	6
AIRCRAFT, MODERN. By Major V. W. Pagé, Air Corps Reserve, U.S.A.	21	0
AIR NAVIGATION FOR THE PRIVATE OWNER. By Frank A. Swoffer, M.B.E.	7	6
AIRMANSHIP. By John McDonough	7	6
AIRSHIP, THE RIGID. By E. H. Lewitt, B.Sc., M.I.Ae.E. . . .	30	0
AUTOGIRO, C. 19, BOOK OF THE. By C. J. Sanders and A. H. Rawson	5	0
AVIATION FROM THE GROUND UP. By Lieut. G. B. Manly . .	15	0

Aeronautics, etc.—contd.

s. d.

CIVILIAN AIRCRAFT, REGISTER OF. By W. O. Manning and R. L. Preston	3	6
FLYING AS A CAREER. By Major Oliver Stewart, M.C., A.F.C.	3	6
GLIDING AND MOTORLESS FLIGHT. By C. F. Carr and L. Howard-Flanders, A.F.R.Æ.S., M.I.Æ.E., A.M.I.Mech.E.	7	6
LEARNING TO FLY. By F. A. Swoffer, M.B.E. With a Foreword by the late Sir Sefton Brancker, K.C.B., A.F.C. 2nd Ed.	7	6
PARACHUTES FOR AIRMEN. By Charles Dixon	7	6
PILOT'S "A" LICENCE Compiled by John F. Leeming, <i>Royal Aero Club Observer for Pilot's Certificates</i> . Fourth Edition	3	6

MARINE ENGINEERING

MARINE ENGINEERING, DEFINITIONS AND FORMULAE FOR STUDENTS. By E. Wood, B.Sc.	-	6
MARINE SCREW PROPELLERS, DETAIL DESIGN OF. By Douglas H. Jackson, M.I.Mar.E., A.M.I.N.A.	6	0

OPTICS AND PHOTOGRAPHY

AMATEUR CINEMATOGRAPHY. By Capt. O. Wheeler, F.R.P.S.	6	0
APPLIED OPTICS, AN INTRODUCTION TO. Volume I. By L. C. Martin, D.Sc., D.I.C., A.R.C.S.	21	0
BROMOIL AND TRANSFER. By L. G. Gabriel	7	6
CAMERA LENSES. By A. W. Lockett	2	6
COLOUR PHOTOGRAPHY. By Capt. O. Wheeler, F.R.P.S.	12	6
COMMERCIAL PHOTOGRAPHY. By D. Charles	5	0
COMPLETE PRESS PHOTOGRAPHER, THE. By Bell R. Bell.	6	0
LENS WORK FOR AMATEURS. By H. Orford. Fifth Edition, Revised by A. Lockett	3	6
PHOTOGRAPHIC CHEMICALS AND CHEMISTRY. By J. Southworth and T. L. J. Bentley	3	6
PHOTOGRAPHIC PRINTING. By R. R. Rawkins	3	6
PHOTOGRAPHY AS A BUSINESS. By A. G. Willis	5	0
PHOTOGRAPHY THEORY AND PRACTICE. By E. P. Clerc. Edited by G. E. Brown	35	0
RETOUCHING AND FINISHING FOR PHOTOGRAPHERS. By J. S. Adamson	4	0
STUDIO PORTRAIT LIGHTING. By H. Lambert, F.R.P.S.	15	0

ASTRONOMY

ASTRONOMY, PICTORIAL. By G. F. Chambers, F.R.A.S.	2	6
ASTRONOMY FOR EVERYBODY. By Professor Simon Newcomb, LL.D. With an Introduction by Sir Robert Ball	5	0
GREAT ASTRONOMERS. By Sir Robert Ball, D.Sc., LL.D., F.R.S.	5	0
HIGH HEAVENS, IN THE. By Sir Robert Ball	5	0
STARRY REALMS, IN. By Sir Robert Ball, D.Sc., LL.D., F.R.S.	5	0

MOTOR ENGINEERING

11

MOTOR ENGINEERING

s. d.

AUTOMOBILE AND AIRCRAFT ENGINES By A. W. Judge, A.R.C.S., A.M.I.A.E. Second Edition	42	0
CARBURETTOR HANDBOOK, THE. By E. W. Knott, A.M.I.A.E..	10	6
GAS AND OIL ENGINE OPERATION. By J. Okill, M.I.A.E..	5	0
GAS, OIL, AND PETROL ENGINES. By A. Garrard, Wh.Ex. .	6	0
MAGNETO AND ELECTRIC IGNITION. By W. Hibbert, A.M.I.E.E. Third Edition	3	6
MOTOR-CYCLIST'S LIBRARY, THE. Each volume in this series deals with a particular type of motor-cycle from the point of view of the owner-driver Each	2	0
A.J.S., THE BOOK OF THE. By W. C. Haycraft.		
ARIEL, THE BOOK OF THE. By G. S. Davison.		
B.S.A., THE BOOK OF THE. By "Waysider."		
DOUGLAS, THE BOOK OF THE. By E. W. Knott.		
IMPERIAL, BOOK OF THE NEW. By F. J. Camm.		
MATCHLESS, THE BOOK OF THE. By W. C. Haycraft.		
NORTON, THE BOOK OF THE. By W. C. Haycraft		
P. AND M., THE BOOK OF THE. By W. C. Haycraft.		
RALEIGH HANDBOOK, THE. By "Mentor."		
ROYAL ENFIELD, THE BOOK OF THE. By R. E. Ryder.		
RUDGE, THE BOOK OF THE. By L. H. Cade.		
TRIUMPH, THE BOOK OF THE. By E. T. Brown.		
VILLIERS ENGINE, BOOK OF THE. By C. Grange.		
MOTORISTS' LIBRARY, THE. Each volume in this series deals with a particular make of motor-car from the point of view of the owner-driver. The functions of the various parts of the car are described in non-technical language, and driving repairs, legal aspects, insurance, touring, equipment, etc., all receive attention.		
AUSTIN, THE BOOK OF THE. By B. Garbutt. Third Edition, Revised by E. H. Row	3	6
MORGAN, THE BOOK OF THE. By G. T. Walton	2	6
SINGER JUNIOR, BOOK OF THE. By G. S. Davison.	2	6
MOTORIST'S ELECTRICAL GUIDE, THE. By A. H. Avery, A.M.I.E.E.	3	6
CARAVANNING AND CAMPING. By A. H. M. Ward, M.A.	2	6

ELECTRICAL ENGINEERING, ETC.

ACCUMULATOR CHARGING, MAINTENANCE, AND REPAIR. By W. S. Ibbetson. Second Edition	3	6
ALTERNATING CURRENT BRIDGE METHODS. By B. Hague, D.Sc. Second Edition	15	0

Electrical Engineering, etc.—contd.		s. d.
ALTERNATING CURRENT CIRCUIT. By Philip Kemp, M.I.E.E..	2	6
ALTERNATING CURRENT MACHINERY, PAPERS ON THE DESIGN OF. By C. C. Hawkins, M.A., M.I.E.E., S. P. Smith, D.Sc., M.I.E.E., and S. Neville, B.Sc.	21	0
ALTERNATING CURRENT POWER MEASUREMENT. By G. F. Tagg, B.Sc.	3	6
ALTERNATING CURRENT WORK. By W. Perren Maycock, M.I.E.E. Second Edition	10	6
ALTERNATING CURRENTS, THE THEORY AND PRACTICE OF. By A. T. Dover, M.I.E.E. Second Edition	18	0
ARMATURE WINDING, PRACTICAL DIRECT CURRENT. By L. Wollison	7	6
CABLES, HIGH VOLTAGE. By P. Dunsheath, O.B.E., M.A., B.Sc., M.I.E.E.	10	6
CONTINUOUS CURRENT DYNAMO DESIGN, ELEMENTARY PRINCIPLES OF. By H. M. Hobart, M.I.C.E., M.I.M.E., M.A.I.E.E.	10	6
CONTINUOUS CURRENT MOTORS AND CONTROL APPARATUS. By W. Perren Maycock, M.I.E.E..	7	6
DEFINITIONS AND FORMULÆ FOR STUDENTS—ELECTRICAL. By P. Kemp, M.Sc., M.I.E.E.	—	6
DEFINITIONS AND FORMULÆ FOR STUDENTS—ELECTRICAL INSTALLATION WORK. By F. Peake Sexton, A.R.C.S., A.M.I.E.E.	—	6
DIRECT CURRENT ELECTRICAL ENGINEERING, ELEMENTS OF. By H. F. Trewman, M.A., and C. E. Condliffe, B.Sc.	5	0
DIRECT CURRENT ELECTRICAL ENGINEERING, PRINCIPLES OF. By James R. Barr, A.M.I.E.E.	15	0
DIRECT CURRENT DYNAMO AND MOTOR FAULTS. By R.M. Archer	7	6
DIRECT CURRENT MACHINES, PERFORMANCE AND DESIGN OF. By A. E. Clayton, D.Sc., M.I.E.E.	16	0
DYNAMO, THE: ITS THEORY, DESIGN, AND MANUFACTURE. By C. C. Hawkins, M.A., M.I.E.E. In three volumes. Sixth Edition—		
Volume I	21	0
II	15	0
III	30	0
DYNAMO, HOW TO MANAGE THE. By A. E. Bottone. Sixth Edition, Revised and Enlarged	2	0
ELECTRIC AND MAGNETIC CIRCUITS, THE ALTERNATING AND DIRECT CURRENT. By E. N. Pink B.Sc., A.M.I.E.E.	3	6
ELECTRIC BELLS AND ALL ABOUT THEM. By S. R. Bottone. Eighth Edition, thoroughly revised by C. Sylvester, A.M.I.E.E.	3	6

Electrical Engineering, etc.—contd.

s. d.

ELECTRIC CIRCUIT THEORY AND CALCULATIONS. By W. Perren Maycock, M.I.E.E. Third Edition, Revised by Philip Kemp, M.Sc., M.I.E.E., A.A.I.E.E.	10	6
ELECTRIC LIGHT FITTING, PRACTICAL. By F. C. Allsop. Tenth Edition, Revised and Enlarged	7	6
ELECTRIC LIGHTING AND POWER DISTRIBUTION. By W. Perren Maycock, M.I.E.E. Ninth Edition, thoroughly Revised by C. H. Yeaman		
Volume I	10	6
II	10	6
ELECTRIC MACHINES, THEORY AND DESIGN OF. By F. Creedy, M.A.I.E.E., A.C.G.I.	30	0
ELECTRIC MOTORS AND CONTROL SYSTEMS. By A. T. Dover, M.I.E.E., A.Amer.I.E.E.	15	0
ELECTRIC MOTORS (DIRECT CURRENT): THEIR THEORY AND CONSTRUCTION. By H. M. Hobart, M.I.E.E., M.Inst.C.E., M.Amer.I.E.E. Third Edition, thoroughly Revised	15	0
ELECTRIC MOTORS (POLYPHASE): THEIR THEORY AND CONSTRUCTION. By H. M. Hobart, M.Inst.C.E., M.I.E.E., M.Amer.I.E.E. Third Edition, thoroughly Revised	15	0
ELECTRIC MOTORS FOR CONTINUOUS AND ALTERNATING CURRENTS, A SMALL BOOK ON. By W. Perren Maycock, M.I.E.E.	6	0
ELECTRIC TRACTION. By A. T. Dover, M.I.E.E., Assoc.Amer. I.E.E. Second Edition	25	0
ELECTRIC TRAIN-LIGHTING. By C. Coppock	7	6
ELECTRIC TROLLEY BUS. By R. A. Bishop	12	6
ELECTRIC WIRING DIAGRAMS. By W. Perren Maycock, M.I.E.E.	5	0
ELECTRIC WIRING, FITTINGS, SWITCHES, AND LAMPS. By W. Perren Maycock, M.I.E.E. Sixth Edition. Revised by Philip Kemp, M.Sc., M.I.E.E.	10	6
ELECTRIC WIRING OF BUILDINGS. By F. C. Raphael, M.I.E.E.	10	6
ELECTRIC WIRING TABLES. By W. Perren Maycock, M.I.E.E. Revised by F. C. Raphael, M.I.E.E. Sixth Edition	3	6
ELECTRICAL CONDENSERS. By Philip R. Coursey, B.Sc., F.Inst.P., A.M.I.E.E.	37	6
ELECTRICAL EDUCATOR. By Sir Ambrose Fleming, M.A., D.Sc., F.R.S. In three volumes. Second Edition	72	0
ELECTRICAL ENGINEERING, CLASSIFIED EXAMPLES IN. By S. Gordon Monk, B.Sc. (Eng.), A.M.I.E.E. In two parts—		
Volume I. DIRECT CURRENT. Second Edition	2	6
II. ALTERNATING CURRENT. Second Edition	3	6
ELECTRICAL ENGINEERING, ELEMENTARY. By O. R. Randall, Ph.D., B.Sc., Wh.Ex.	5	0
ELECTRICAL ENGINEER'S POCKET BOOK, WHITTAKER'S. Originated by Kenelm Edgcumbe, M.I.E.E., A.M.I.C.E. Sixth Edition. Edited by R. E. Neale, B.Sc. (Hons.)	10	6

Electrical Engineering, etc.—contd.

s. d.

ELECTRICAL INSTRUMENT MAKING FOR AMATEURS. By S. R. Bottone: Ninth Edition.	6	0
ELECTRICAL INSULATING MATERIALS. By A. Monkhouse, Junr., M.I.E.E., A.M.I.Mech.E.	21	0
ELECTRICAL GUIDES, HAWKINS'. Each book in pocket size	5	0
1. ELECTRICITY, MAGNETISM, INDUCTION, EXPERIMENTS, DYNAMOS, ARMATURES, WINDINGS		
2. MANAGEMENT OF DYNAMOS, MOTORS, INSTRUMENTS, TESTING		
3. WIRING AND DISTRIBUTION SYSTEMS, STORAGE BATTERIES		
4. ALTERNATING CURRENTS AND ALTERNATORS		
5. A.C. MOTORS, TRANSFORMERS, CONVERTERS, RECTIFIERS		
6. A.C. SYSTEMS, CIRCUIT BREAKERS, MEASURING INSTRUMENTS		
7. A.C. WIRING, POWER STATIONS, TELEPHONE WORK		
8. TELEGRAPH, WIRELESS, BELLS, LIGHTING		
9. RAILWAYS, MOTION PICTURES, AUTOMOBILES, IGNITION		
10. MODERN APPLICATIONS OF ELECTRICITY. REFERENCE INDEX		
ELECTRICAL MACHINERY AND APPARATUS MANUFACTURE. Edited by Philip Kemp, M.Sc., M.I.E.E., Assoc.A.I.E.E. In seven volumes	6	0
ELECTRICAL MACHINES, PRACTICAL TESTING OF. By L. Oulton, A.M.I.E.E., and N. J. Wilson, M.I.E.E. Second Edition	6	0
ELECTRICAL POWER TRANSMISSION AND INTERCONNECTION. By C. Dannatt, B.Sc., and J. W. Dalgleish, B.Sc.	30	0
ELECTRICAL TECHNOLOGY. By H. Cotton, M.B.E., D.Sc., A.M.I.E.E.	12	6
ELECTRICAL TERMS, A DICTIONARY OF. By S. R. Roget, M.A., A.M.Inst.C.E., A.M.I.E.E. Second Edition	7	6
ELECTRICAL TRANSMISSION AND DISTRIBUTION. Edited by R. O. Kapp, B.Sc. In eight volumes. Vols. I to VII, each Vol. VIII	6	0
ELECTRICAL WIRING AND CONTRACTING. Edited by H. Marryat, M.I.E.E., M.I.Mech.E. In seven volumes . Each	6	0
ELECTRO-MOTORS: HOW MADE AND HOW USED. By S. R. Bottone. Seventh Edition. Revised by C. Sylvester, A.M.I.E.E.	4	6
ELECTRO-TECHNICS, ELEMENTS OF. By A. P. Young, O.B.E., M.I.E.E.	5	0
FRACTIONAL HORSE-POWER MOTORS. By A. H. Avery, A.M.I.E.E.	7	6
INDUCTION MOTOR, THE. By H. Vickers, Ph.D., M.Eng.	21	0
KINEMATOGRAPHY PROJECTION: A GUIDE TO. By Colin H. Bennett, F.C.S., F.R.P.S.	10	6
MERCURY-ARC RECTIFIERS AND MERCURY-VAPOUR LAMPS. By Sir Ambrose Fleming, M.A., D.Sc., F.R.S.	6	0

TELEGRAPHY, TELEPHONY, AND WIRELESS 15

Electrical Engineering, etc.—contd.

	s.	d.
METER ENGINEERING. By J. L. Ferns, B.Sc. (Hons.), A.M.C.T.	10	6
OSCILLOGRAPHS. By J. T. Irwin, A.M.I.E.E.	7	6
POWER DISTRIBUTION AND ELECTRIC TRACTION, EXAMPLES IN. By A. T. Dover, M.I.E.E., A.A.I.E.E.	3	6
POWER STATION EFFICIENCY CONTROL. By John Bruce, A.M.I.E.E.	12	6
POWER WIRING DIAGRAMS. By A. T. Dover, M.I.E.E., A.Amer. I.E.E. Second Edition, Revised	6	0
PRACTICAL PRIMARY CELLS. By A. Mortimer Codd, F.Ph.S.	5	0
RAILWAY ELECTRIFICATION. By H. F. Trewman, A.M.I.E.E.	21	0
SAGS AND TENSIONS IN OVERHEAD LINES. By C. G. Watson, M.I.E.E.	12	6
STEAM TURBO-ALTERNATOR, THE. By L. C. Grant, A.M.I.E.E.	15	0
STORAGE BATTERIES: THEORY, MANUFACTURE, CARE, AND APPLICATION. By M. Arendt, E.E.	18	0
STORAGE BATTERY PRACTICE. By R. Rankin, B.Sc., M.I.E.E.	7	6
TRANSFORMERS FOR SINGLE AND MULTIPHASE CURRENTS. By Dr. Gisbert Kapp, M.Inst.C.E., M.I.E.E. Third Edition, Revised by R. O. Kapp, B.Sc.	15	0

TELEGRAPHY, TELEPHONY, AND WIRELESS

AUTOMATIC BRANCH EXCHANGES, PRIVATE. By R. T. A. Dennison	12	6
AUTOMATIC TELEPHONY, RELAYS IN. By R. W. Palmer, A.M.I.E.E.	10	6
BAUDÔT PRINTING TELEGRAPH SYSTEM. By H. W. Pendry. Second Edition	6	0
CABLE AND WIRELESS COMMUNICATIONS OF THE WORLD, THE. By F. J. Brown, C.B., C.B.E., M.A., B.Sc. (Lond.). Second Edition	7	6
CRYSTAL AND ONE-VALVE CIRCUITS, SUCCESSFUL. By J. H. Watkins	3	6
RADIO COMMUNICATION, MODERN. By J. H. Reyner, B.Sc. (Hons.), A.C.G.I., D.I.C. Third Edition	5	0
SUBMARINE TELEGRAPHY. By Ing. Italo de Giuli. Translated by J. J. McKichan, O.B.E., A.M.I.E.E.	18	0
TELEGRAPHY. By T. E. Herbert, M.I.E.E. Fifth Edition	20	0
TELEGRAPHY, ELEMENTARY. By H. W. Pendry. Second Edition, Revised	7	6
TELEPHONE HANDBOOK AND GUIDE TO THE TELEPHONIC EXCHANGE, PRACTICAL. By Joseph Poole, A.M.I.E.E. (Wh.Sc.). Seventh Edition	18	0
TELEPHONY. By T. E. Herbert, M.I.E.E.	18	0
TELEPHONY SIMPLIFIED, AUTOMATIC. By C. W. Brown, A.M.I.E.E., <i>Engineer-in-Chief's Department, G.P.O., London</i>	6	0
TELEPHONY, THE CALL INDICATOR SYSTEM IN AUTOMATIC. By A. G. Freestone, <i>of the Automatic Training School, G.P.O., London</i>	6	0

Telegraphy, Telephony, and Wireless—contd. s. d.

TELEPHONY, THE DIRECTOR SYSTEM OF AUTOMATIC. By W. E. Hudson, B.Sc. Hons. (London), Whit.Sch., A.C.G.I.	5	0
TELEVISION : TO-DAY AND TO-MORROW. By Sydney A. Moseley and H. J. Barton Chapple, Wh.Sc., B.Sc. (Hons.), A.C.G.I., D.I.C., A.M.I.E.E. Second Edition	7	6
PHOTOELECTRIC CELLS. By Dr. N. I. Campbell and Dorothy Ritchie. Second Edition.	15	0
WIRELESS MANUAL, THE. By Capt. J. Frost. Third Edition	5	0
WIRELESS TELEGRAPHY AND TELEPHONY, INTRODUCTION TO. By Sir Ambrose Fleming, M.A., D.Sc., F.R.S.	3	6

**MATHEMATICS AND CALCULATIONS
FOR ENGINEERS**

ALTERNATING CURRENTS, ARITHMETIC OF. By E. H. Crapper, D.Sc. M.I.E.E.	4	6
CALCULUS FOR ENGINEERING STUDENTS. By John Stoney, B.Sc., A.M.I.Min.E.	3	6
DEFINITIONS AND FORMULAE FOR STUDENTS—PRACTICAL MATHEMATICS. By L. Toft, M.Sc.	—	6
ELECTRICAL ENGINEERING, WHITTAKER'S ARITHMETIC OF. Third Edition, Revised and Enlarged	3	6
ELECTRICAL MEASURING INSTRUMENTS, COMMERCIAL. By R. M. Archer, B.Sc. (Lond.), A.R.C.Sc., M.I.E.E.	10	6
GEOMETRY, BUILDING. By Richard Greenhalgh, A.I.Struct.E.	4	6
GEOMETRY, CONTOUR. By A. H. Jameson, M.Sc., M.Inst.C.E.	7	6
GEOMETRY, EXERCISES IN BUILDING. By Wilfred Chew	1	6
GEOMETRY, TEST PAPERS IN. By W. E. Paterson, M.A., B.Sc.	2	0
Points Essential to Answers, 1s. In one book.	3	0
GRAPHIC STATICS, ELEMENTARY. By J. T. Wight, A.M.I.Mech.E.	5	0
KILOGRAMS INTO AVOIRDUPOIS, TABLE FOR THE CONVERSION OF. Compiled by Redvers Elder. On paper	1	0
LOGARITHMS FOR BEGINNERS. By C. N. Pickworth, Wh.Sc. Eighth Edition	1	6
LOGARITHMS, FIVE FIGURE, AND TRIGONOMETRICAL FUNCTIONS. By W. E. Dommett, A.M.I.A.E., and H. C. Hird, A.F.Ae.S.	1	0
LOGARITHMS SIMPLIFIED. By Ernest Card, B.Sc., and A. C. PARKINSON, A.C.P. Second Edition	2	0
MATHEMATICS AND DRAWING, PRACTICAL. By Dalton Grange. With Answers	2	0
With Answers	2	6
MATHEMATICS, ENGINEERING, APPLICATION OF. By W. C. Bickley, M.Sc.	5	0
MATHEMATICS, EXPERIMENTAL. By G. R. Vine, B.Sc.		
Book I, with Answers	1	4
II, with Answers	1	4
MATHEMATICS FOR ENGINEERS, PRELIMINARY. By W. S. Ibbetson, B.Sc., A.M.I.E.E., M.I.Mar.E.	3	6
MATHEMATICS, PRACTICAL. By Louis Toft, M.Sc. (Tech.), and A. D. D. McKay, M.A.	16	0
MATHEMATICS FOR TECHNICAL STUDENTS. By G. E. Hall, B.Sc.	5	0

MISCELLANEOUS TECHNICAL BOOKS 17

Mathematics for Engineers—contd. s. d.

MATHEMATICS, INDUSTRIAL (PRELIMINARY), By G. W. Stringfellow	2	0
With Answers	2	6
MEASURING AND MANURING LAND, AND THATCHER'S WORK, TABLES FOR. By J. Cullyer. Twentieth Impression	3	0
MECHANICAL TABLES. By J. Foden	2	0
MECHANICAL ENGINEERING DETAIL TABLES. By John P. Ross	7	6
METALWORKER'S PRACTICAL CALCULATOR, THE. By J. Matheson	2	0
METRIC CONVERSION TABLES. By W. E. Dommett, A.M.I.A.E.	1	0
METRIC LENGTHS TO FEET AND INCHES, TABLE FOR THE CONVERSION OF. Compiled by Redvers Elder. On paper.	1	0
MINING MATHEMATICS (PRELIMINARY). By George W. Stringfellow	1	6
With Answers	2	0
QUANTITIES AND QUANTITY TAKING. By W. E. Davis. Seventh Edition, Revised by P. T. Walters, F.S.I., F.I.Arb.	6	0
SCIENCE AND MATHEMATICAL TABLES. By W. F. F. Shearcroft, B.Sc., A.I.C., and Denham Lattett, M.A.	1	0
SLIDE RULE, THE. By C. N. Pickworth, Wh.Sc. Seventeenth Edition, Revised	3	6
SLIDE RULE: ITS OPERATIONS; AND DIGIT RULES, THE. By A. Lovat Higgins, A.M.Inst.C.E.	—	6
STEEL'S TABLES. Compiled by Joseph Steel	3	6
TELEGRAPHY AND TELEPHONY, ARITHMETIC OF. By T. E. Herbert, M.I.E.E., and R. G. de Wardt	5	0
TEXTILE CALCULATIONS. By J. H. Whitwam, B.Sc.	25	0
TRIGONOMETRY FOR ENGINEERS, A PRIMER OF. By W. G. Dunkley, B.Sc. (Hons.)	5	0
TRIGONOMETRY FOR NAVIGATING OFFICERS. By W. Percy Winter, B.Sc. (Hons.), Lond.	10	6
TRIGONOMETRY, PRACTICAL. By Henry Adams, M.I.C.E., M.I.M.E., F.S.I. Third Edition, Revised and Enlarged	5	0
VENTILATION, PUMPING, AND HAULAGE, MATHEMATICS OF. By F. Birks	5	0
WORKSHOP ARITHMETIC, FIRST STEPS IN. By H. P. Green	1	0

MISCELLANEOUS TECHNICAL BOOKS

BOOT AND SHOE MANUFACTURE. By F. Plucknett	35	0
BREWING AND MALTING. By J. Ross Mackenzie, F.C.S., F.R.M.S. Second Edition	8	6
BUILDER'S BUSINESS MANAGEMENT. By J. H. Bennetts, A.I.O.B.	10	6
CERAMIC INDUSTRIES POCKET BOOK. By A. B. Searle	8	6
CINEMA ORGAN, THE. By Reginald Foort, F.R.C.O.	2	6
ELECTRICAL HOUSECRAFT. By R. W. Kennedy	2	6
ENGINEERING ECONOMICS. By T. H. Burnham, B.Sc. (Hons.), B.Com., A.M.I.Mech.E. Second Edition	10	6

Miscellaneous Technical Books—contd.

	<i>s.</i>	<i>d.</i>
ENGINEERING INQUIRIES, DATA FOR. By J. C. Connan, B.Sc., A.M.I.E.E., O.B.E.	12	6
ESTIMATING. By T. H. Hargrave. Second Edition	7	6
FARADAY, MICHAEL, AND SOME OF HIS CONTEMPORARIES. By Prof. William Cramp, D.Sc., M.I.E.E.	2	6
FURNITURE STYLES. By H. E. Binstead. Second Edition . .	10	6
GLUE AND GELATINE. By P. I. Smith	8	6
GRAMOPHONE HANDBOOK. By W. S. Rogers	2	6
HAIRDRESSING, THE ART AND CRAFT OF. Edited by G. A. Foan.	60	0
HIKER AND CAMPER, THE COMPLETE. By C. F. Carr	2	6
HOUSE DECORATIONS AND REPAIRS. By W. Prebble. Second Edition	1	0
MOTOR BOATING. By F. H. Snoxell	2	6
MUSIC ENGRAVING AND PRINTING. By Wm. Gamble, F.R.P.S.	21	0
PAPER TESTING AND CHEMISTRY FOR PRINTERS. By Gordon A. Jahans, B.A.	12	6
PETROLEUM. By Albert Lidgett. Third Edition	5	0
PRINTING. By H. A. Maddox	5	0
REFRACTORIES FOR FURNACES, CRUCIBLES, ETC. By A. B. Searle	5	0
REFRIGERATION, MECHANICAL. By Hal Williams, M.I.Mech.E., M.I.E.E., M.I.Struct.E. Third Edition	20	0
SEED TESTING. By J. Stewart Remington	10	6
STONES, PRECIOUS AND SEMI-PRECIOUS. By Michael Wein- stein. Second Edition	7	6
STORES ACCOUNTS AND STORES CONTROL. By J. H. Burton. Second Edition	5	0
TALKING PICTURES. By Bernard Brown, B.Sc. (Eng.)	12	6
TEACHING METHODS FOR TECHNICAL TEACHERS. By J. H. Currie, M.A., B.Sc., A.M.I.Mech.E.	2	6

PITMAN'S TECHNICAL PRIMERS

Each in foolscap 8vo, cloth, about 120 pp., illustrated . . .	2	6
In each book of the series the fundamental principles of some subdivision of technology are treated in a practical manner, providing the student with a handy survey of the particular branch of technology with which he is concerned.		
ABRASIVE MATERIALS. By A. B. Searle.		
A.C. PROTECTIVE SYSTEMS AND GEARS. By J. Henderson, B.Sc., M.C., and C. W. Marshall, B.Sc., M.I.E.E.		
BELTS FOR POWER TRANSMISSION. By W. G. Dunkley, B.Sc.		
BOILER INSPECTION AND MAINTENANCE. By R. Clayton.		
CAPSTAN AND AUTOMATIC LATHES. By Philip Gates.		
CENTRAL STATIONS, MODERN. By C. W. Marshall, B.Sc., A.M.I.E.E.		
COAL CUTTING MACHINERY, LONGWALL. By G. F. F. Eagar, M.I.Min.E.		
CONTINUOUS CURRENT ARMATURE WINDING. By F. M. Denton, A.C.G.I., A.Amer.I.E.E.		
CONTINUOUS CURRENT MACHINES, THE TESTING OF. By Charles F. Smith, D.Sc., M.I.E.E., A.M.I.C.E.		

Pitman's Technical Primers—contd. Each 2s. 6d.

- POWER FACTOR CORRECTION. By A. E. Clayton, B.Sc. (Eng.)
 Lond., A.K.C., A.M.I.E.E.
- RADIOACTIVITY AND RADIOACTIVE SUBSTANCES. By J.
 Chadwick, M.Sc., Ph.D.
- RAILWAY SIGNALLING: AUTOMATIC. By F. Raynar Wilson.
- RAILWAY SIGNALLING: MECHANICAL. By F. Raynar Wilson.
- SEWERS AND SEWERAGE. By H. Gilbert Whyatt, M.I.C.E.
- SPARKING PLUGS. By A. P. Young and H. Warren.
- STEAM ENGINE VALVES AND VALVE GEARS. By E. L. Ahrons,
 M.I.Mech.E., M.I.Loco.E.
- STEAM LOCOMOTIVE, THE. By E. L. Ahrons, M.I.Mech.E.,
 M.I.Loco.E.
- STEAM LOCOMOTIVE CONSTRUCTION AND MAINTENANCE. By E.
 L. Ahrons, M.I.Mech.E., M.I.Loco.E.
- STEELWORK, STRUCTURAL. By Wm. H. Black.
- STREETS, ROADS, AND PAVEMENTS. By H. Gilbert Whyatt,
 M.Inst.C.E., M.R.San.I.
- SWITCHBOARDS, HIGH TENSION. By Henry E. Poole, B.Sc.
 (Hons.), Lond., A.C.G.I., A.M.I.E.E.
- SWITCHGEAR, HIGH TENSION. By Henry E. Poole, B.Sc.(Hons.),
 A.C.G.I., A.M.I.E.E.
- SWITCHING AND SWITCHGEAR. By Henry E. Poole, B.Sc.(Hons.),
 A.C.G.I., A.M.I.E.E.
- TELEPHONES, AUTOMATIC. By F. A. Ellson, B.Sc., A.M.I.E.E.
 (Double volume, price 5s.)
- TIDAL POWER. By A. M. A. Struben, O.B.E., A.M.Inst.C.E.
- TOOL AND MACHINE SETTING. For Milling, Drilling, Tapping,
 Boring, Grinding, and Press Work. By Philip Gates.
- TOWN GAS MANUFACTURE. By Ralph Staley, M.C.
- TRACTION MOTOR CONTROL. By A. T. Dover, M.I.E.E.
- TRANSFORMERS AND ALTERNATING CURRENT MACHINES, THE
 TESTING OF. By Charles F. Smith, D.Sc., A.M.Inst.C.E.
- TRANSFORMERS, HIGH VOLTAGE POWER. By Wm. T. Taylor,
 M.Inst.C.E., M.I.E.E.
- TRANSFORMERS, SMALL SINGLE-PHASE. By Edgar T. Painton,
 B.Sc. Eng. (Hons.) Lond., A.M.I.E.E.
- WATER POWER ENGINEERING. By F. F. Fergusson,
 C.E., F.G.S., F.R.G.S.
- WIRELESS TELEGRAPHY, CONTINUOUS WAVE. By B. E. G.
 Mittell, A.M.I.E.E.
- WIRELESS TELEGRAPHY, DIRECTIVE. Direction and Position
 Finding, etc. By L. H. Walter, M.A. (Cantab.), A.M.I.E.E.
- X-RAYS, INDUSTRIAL APPLICATION OF. By P. H. S. Kempton,
 B.Sc. (Hons.), A.R.C.S.

COMMON COMMODITIES AND INDUSTRIES

Each book in crown 8vo, illustrated. 3s. net.

In each of the handbooks in this series a particular product or industry is treated by an expert writer and practical man of business. Beginning with the life history of the plant, or other natural product, he follows its development until it becomes a commercial commodity, and so on through the various phases of its sale in the market and its purchase by the consumer.

- Asbestos.** (SUMMERS.)
- Bookbinding Craft and Industry.** (HARRISON.)
- Books—From the MS. to the Book-seller.** (YOUNG.)
- Boot and Shoe Industry, The.** (HARDING.)
- Bread and Bread Baking.** (STEWART.)
- Brushmaker, The.** (KIDDIER.)
- Butter and Cheese.** (TISDALE and JONES.)
- Button Industry, The.** (JONES.)
- Carpets.** (BRINTON.)
- Clays and Clay Products.** (SEARLE.)
- Clocks and Watches.** (OVERTON.)
- Clothing Industry, The.** (POOLE.)
- Cloths and the Cloth Trade.** (HUNTER.)
- Coal.** (WILSON.)
- Coal Tar.** (WARNES.)
- Coffee—From Grower to Consumer.** (KEABLE.)
- Cold Storage and Ice Making.** (SPRINGETT.)
- Concrete and Reinforced Concrete.** (TWELVETREES.)
- Copper—From the Ore to the Metal.** (PICARD.)
- Cordage and Cordage Hemp and Fibres.** (WOODHOUSE and KILGOUR.)
- Corn Trade, The British.** (BARKER.)
- Cotton.** (PEAKE.)
- Cotton Spinning.** (WADE.)
- Drugs in Commerce.** (HUMPHREY.)
- Dyes.** (HALL.)
- Electricity.** (NEALE.)
- Engraving.** (LASCELLES.)
- Explosives, Modern.** (LEVY.)
- Fertilizers.** (CAVE.)
- Fishing Industry, The.** (GIBBS.)
- Furniture.** (BINSTEAD.)
- Furs and the Fur Trade.** (SACHS.)
- Gas and Gas Making.** (WEBBER.)
- Glass and Glass Making.** (MARSON.)
- Gloves and the Glove Trade.** (ELLIS.)
- Gold.** (WHITE.)
- Gums and Resins.** (PARRY.)
- Ink.** (MITCHELL.)
- Iron and Steel.** (HOOD.)
- Ironfounding.** (WHITELEY.)
- Jute Industry, The.** (WOODHOUSE and KILGOUR.)
- Knitted Fabrics.** (CHAMBERLAIN and QUILTER.)
- Lead, including Lead Pigments.** (SMYTHE.)
- Leather.** (ADCOCK.)
- Linen.** (MOORE.)
- Locks and Lock Making.** (BUTTER.)
- Match Industry, The.** (DIXON.)
- Meat Industry, The.** (WOOD.)
- Oils.** (MITCHELL.)
- Paints and Varnishes.** (JENNINGS.)
- Paper.** (MADDOX.)
- Perfumery, The Raw Materials of.** (PARRY.)
- Photography.** (GAMBLE.)
- Platinum Metals, The.** (SMITH.)
- Pottery.** (NOKE and PLANT.)

Common Commodities and Industries—contd.

Rice. (DOUGLAS.)	Telegraphy, Telephony, and Wireless. (POOLE.)
Rubber. (STEVENS and STEVENS.)	Textile Bleaching. (STEVEN.)
Salt. (CALVERT.)	Timber. (BULLOCK.)
Silk. (HOOPER.)	Tin and the Tin Industry. (MUNDEY.)
Soap. (SIMMONS.)	Tobacco. (TANNER.) (Revised by DEEW.)
Sponges. (CRESSWELL.)	Weaving. (CRANKSHAW.)
Starch and Starch Products. (AUDEN.)	Wheat and Its Products. (MILLAR.)
Stones and Quarries. (HOWE.)	Wine and the Wine Trade. (SIMON.)
Sugar. (MARTINEAU.) (Revised by EASTICK.)	Wool. (HUNTER.)
Sulphur and Allied Products. (AUDEN.)	Worsted Industry, The. (DUMVILLE and KERSHAW.)
Tea. (LEBBETSON.)	Zinc and Its Alloys. (LONES.)

PITMAN'S SHORTHAND

INVALUABLE TO ALL BUSINESS AND PROFESSIONAL MEN

The following Catalogues will be sent post free on application—

SCIENTIFIC AND TECHNICAL
EDUCATIONAL, COMMERCIAL, SHORTHAND
FOREIGN LANGUAGES, AND ART

DEFINITIONS AND FORMULAE FOR STUDENTS

This series of booklets is intended to provide engineering students with all necessary definitions and formulae in a convenient form.

ELECTRICAL

By PHILIP KEMP, M.Sc., M.I.E.E., *Assoc.A.I.E.E.*,
Head of the Electrical Engineering Department of the
Regent Street Polytechnic.

HEAT ENGINES

By ARNOLD RIMMER, B.Eng., *Head of the Mechanical*
Engineering Department, Derby Technical College. Second
Edition.

APPLIED MECHANICS

By E. H. LEWITT, B.Sc., A.M.I.Mech.E.

PRACTICAL MATHEMATICS

By LOUIS TOFT, M.Sc., *Head of the Mathematical*
Department of the Royal Technical College, Salford.

CHEMISTRY

By W. GORDON CAREY, F.I.C.

BUILDING

By T. CORKHILL, F.B.I.C.C., M.I.Struct.E., M.Coll.H.

AERONAUTICS

By JOHN D. FRIER, A.R.C.Sc., D.I.C., F.R.Ae.S.

COAL MINING

By M. D. WILLIAMS, F.G.S.

MARINE ENGINEERING

By E. WOOD, B.Sc.

ELECTRICAL INSTALLATION WORK

By F. PEAKE SEXTON, A.R.C.S., A.M.I.E.E.

LIGHT AND SOUND

By P. K. BOWES, M.A., B.Sc.

Each in pocket size, about 32 pp. 6d. net.

PITMAN'S
TECHNICAL
DICTIONARY
OF
ENGINEERING *and* INDUSTRIAL
SCIENCE
IN SEVEN LANGUAGES

ENGLISH, FRENCH, SPANISH, ITALIAN,
PORTUGUESE, RUSSIAN, AND GERMAN
WITH AN ADDITIONAL VOLUME CONTAINING A COMPLETE
KEY INDEX IN EACH OF THE SEVEN LANGUAGES

Edited by
ERNEST SLATER, M.I.E.E., M.I.Mech.E.
In Collaboration with Leading Authorities

THE Dictionary is arranged upon the basis of the English version. This means that against every English term will be found the equivalents in the six other languages, together with such annotations as may be necessary to show the exact use of the term in any or all of the languages.

"There is not the slightest doubt that this Dictionary will be the essential and standard book of reference in its sphere. It has been needed for years."—*Electrical Industries*.

"The work should be of the greatest value to all who have to deal with specifications, patents, catalogues, etc., for use in foreign trade."—*Bankers' Magazine*.

"The work covers extremely well the ground it sets out to cover, and the inclusion of the Portuguese equivalents will be of real value to those who have occasion to make technical translations for Portugal, Brazil, or Portuguese East Africa."—*Nature*.

Complete in five volumes. Crown 4to, buckram gilt, £8 8s. net.

